

# Mediant™ 3000 High Availability VoIP Gateway



- Low to mid-density VoIP gateway offering scaling from 480 to 2016 channels
- Supports high availability configuration with reliable 1+1 redundancy
- Compact footprint (2U), ideal for small locations
- Allows easy capacity upgrades via a software key
- Provides multi-control protocol support: SIP, H.248, MGCP and TGCP
- Offers broad range of PSTN interfaces including E1, T1, T3, OC3 and STM-1
- Enables flexible interworking between IP - TDM and IP - IP
- Supplies a wide range of vocoders which include Low Bit Rate (LBR), wireline, cellular and wideband vocoders
- No capacity hit on most of the LBR vocoders (e.g., G.729, G.723 and AMR)
- Functions as an IMS Media Gateway and I-BGF network elements
- Enhanced Gateways for Lync Server 2010



The **Mediant™ 3000** is a feature-rich, highly available VoIP gateway supporting low to medium channel densities. The Mediant 3000 compact footprint (2U) meets both the needs of service providers with geographically dispersed networks, as well as those of large enterprises, where reliable and dense VoIP gateways are necessary for business-critical communications.

## MEDIANT 3000 IN SERVICE PROVIDER NETWORKS

Service Providers are currently migrating from centralized legacy TDM networks to decentralized IP networks. The Mediant 3000 is aligned with these developments, offering exceptional channel scalability of up to 2016 DSOs in a compact 19"-2U chassis, allowing it to be placed in small POPs, close to local telephone networks. Additionally, the Mediant 3000 delivers the same carrier-grade availability that service providers are accustomed to on their legacy equipment. A wide range of trunking and access protocols to suit any application are provided, such as PRI, V5.2 and CAS access protocols and SS7/M2UA/M3UA trunking protocols. The Mediant 3000 fits the needs of wireline, cable, cellular and mixed service providers.

## MEDIANT 3000 IN LARGE ENTERPRISES

The migration to VoIP in the enterprise is driven by cost considerations and the need for a richer, integrated telephony service. This transition leads to heterogeneous enterprise telephony networks that deploy multiple PBXs from various vendors, some of which are legacy and some of which are IP-based. An enterprise might choose to connect to a PSTN Service Provider or to an Internet Telephony Service Provider (ITSP) or both. The Mediant 3000 has comprehensive PSTN access capabilities as well as SIP to SIP interworking features that enable the interconnection between all these elements. Large enterprises typically deploy business critical contact centers where the high availability of the Mediant 3000 is a key factor. In addition to E1/T1 interfaces, the Mediant 3000 supports high-density PSTN interfaces, such as T3, STM-1 and OC3 to provide the enterprise with lower PSTN lease costs. The proven interoperability of the Mediant 3000 with different PBXs and PSTN switches facilitates smooth deployment.

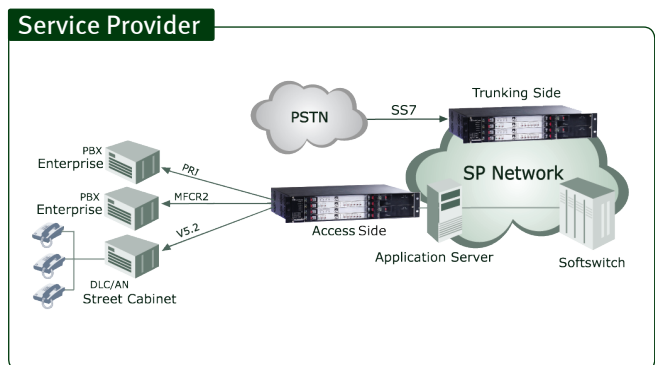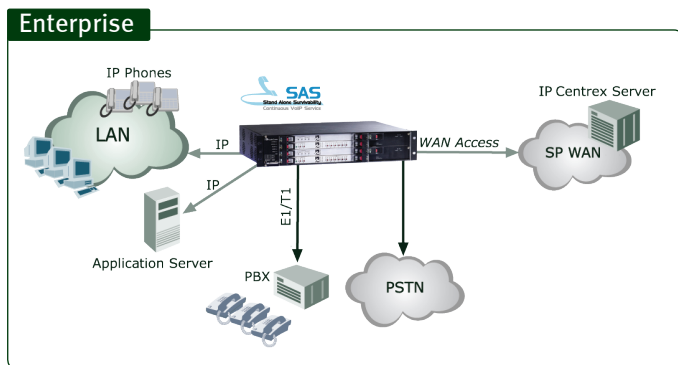

# AudioCodes VoIP Media Gateway for Service Provider and Enterprise Applications

## Mediant™ 3000 High Availability VoIP Gateway

### SPECIFICATIONS

#### Media Processing

Capacity	Up to 2,016 channels in simplex or redundant configuration
Voice Coders	High Definition Voice Codecs <sup>1</sup> : G.722, G.722.2 (Wideband AMR), G.729.1 (Wideband G.729), RTA-WB, SPEEX, SILK* Wireline: G.711, G.722 <sup>1</sup> , G.723.1, G.726/7, G.729A/B, EG.711, MS GSM, iLBC <sup>1</sup> GSM/UMTS: GSM-FR, GSM EFR, AMR, AMR-WB <sup>1</sup> CDMA: EVRC <sup>1</sup> , EVRC-B <sup>1</sup> Independent dynamic vocoder selection per channel (within each group) Not all coders can be used simultaneously
Echo Cancellation	G.165 and G.168-2002 compliant, with 32, 64 or 128 ms tail length
Fax and Modem Transport	Fax/Modem Detection Control, T.38 (IP) compliant Group 3 & SG3 fallback to T.30, V.34 fax and modem bypass (automatic fallback to G.711) support
DTMF/MF	IP-side or PSTN-side detection and generation, RFC 4733 compliant DTMF relay Detection and Generation of Call Progress tones, Answer Machine Detection
Quality Enhancement	VAD, CNG, dynamic programmable jitter buffer, 802.1p/Q VLAN tagging, DiffServ

#### Signaling

PSTN Access	E1 ISDN: EuroISDN, QSIG, Australia, Hong Kong (HKT), Korea, France, New Zealand, INS-1500 (Japan), VN3, VN4, VN6 (France); T1 ISDN: NI2, 4ESS, 5ESS, DMS100; E1 CAS: MFC-R2 (multiple variants), T1 CAS: E&M, Ground Start, LoopStart; V5.2; IUA
PSTN Trunking	SS7/Sigtran: M3UA, M2UA, Redundancy (1+1), SS7 Tunneling
IP Transport	IPv4/IPv6, IETF RFC 3550, RFC 3551 RTP/IP Transport, TCP, UDP, RFC3267, RFC 3558 RTP/UDP/IP, Nb-IP (TS 29.415)
Control Protocols	MGCP (RFC 3435), TGCP (PacketCable), MEGACO (H.248, RFC 3015), SIP (RFC 3261) IMS Mn - TS 29.332, IMS Mc (TS 29.232)
Security	IPSEC, IKE, SIP/TLS, HTTPS, SSH, SRTP <sup>2</sup> and AES <sup>1</sup> , ARIA, RADIUS login Separation of OAM, Control and Media traffic is possible by using either different IP interfaces (available only on T1/E1 configuration) or VLANs
SIP IP - IP Mediation	SIP - SIP Normalization, Network Topology Hiding, Transcoding and Conversion, Signaling Translation, Multiple Service Provider Connectivity and Load Balancing, Redundancy between Servers/Softswitch, Survivability (SAS)

#### Maintenance

Management	AudioCodes Element Management System, SNMPv2, SNMPv3, CLI, Telnet, WEB, Microsoft System Center Operations Manager (SCOM), Remote configuration and software download via TFTP, HTTP, HTTPS, DHCP and BootP, Syslog
Maintainability	All shelf modules are hot swappable, including boards, power supplies, fans, and power entry modules
Redundancy Scheme	Power supply, fans: N+1 load shared Media gateway blades (including PSTN interfaces): 1+1 Optical interfaces (PSTN): 1+1, APS protected

#### Hardware Specifications

Interfaces	<b>PSTN:</b> 1 OC-3 or STM-1 APS optical links, 1 to 3 T3 (DS3) electrical links, up to 64/84 E1/T1 links <b>IP:</b> Dual Redundant 100/1000 Base-T/1000 Base-SX Ethernet ports and additional two Dual Redundant 100 Base-T Ethernet ports for OEM and Control (Available on the E1/T1 configuration only) <b>Clock Synchronization:</b> BITS/SETS (GR-1244 Stratum-3 and G.813 compliant), line synchronization (via STM-1/OC-3 link or DS1 trunk)
Enclosure	4-slot, 2U cPCI chassis
Dimensions (HxWxD)	88 mm x 482.6 mm x 296.8 mm
Weight	Approx. 35.27 lb (16 kg), fully loaded
Mounting	Per EIA Standard RS-310-C in 19-inch rack specification
Power	48 V DC Dual Feed, with up to 2 DC Power modules, 100-240 V AC redundant Dual Feed
Cooling	Replaceable fan tray & filter

#### Regulatory Compliance

Telecommunication Standards	FCC part 68, TBR4 and TBR13, Anatel
Safety and EMC Standards	<ul style="list-style-type: none"> <li>UL60950</li> <li>FCC part 15 Class A</li> <li>CE Mark (EN55022 Class A, EN60950, EN55024, EN300 386)</li> </ul>
Environmental	NEBS Level 3: GR-63-Core, GR-1089-Core, Type 1 & 3, ETS300 019

### ABOUT AUDIOCODES

AudioCodes Ltd. (NasdaqGS: AUCD) designs, develops and sells advanced Voice over IP (VoIP) and converged VoIP and Data networking products and applications to Service Providers and Enterprises. AudioCodes is a VoIP technology market leader focused on converged VoIP & data communications and its products are deployed globally in Broadband, Mobile, Enterprise networks and Cable. The company provides a range of innovative, cost-effective products including Media Gateways, Multi-Service Business Gateways, Session Border Controllers (SBC), Residential Gateways, IP Phones, Media Servers and Value Added Applications. AudioCodes' underlying technology, VolPerfectHD™, relies on AudioCodes' leadership in DSP, voice coding and voice processing technologies. AudioCodes High Definition (HD) VoIP technologies and products provide enhanced intelligibility and a better end user communication experience in Voice communications.

#### International Headquarters

1 Hayarden Street,  
Airport City  
Lod 70151, Israel  
Tel: +972-3-976-4000  
Fax: +972-3-976-4040

#### AudioCodes Inc.

27 World's Fair Drive,  
Somerset, NJ 08873  
Tel: +1-732-469-0880  
Fax: +1-732-496-2298

Contact us: [www.audiocodes.com/contact](http://www.audiocodes.com/contact)  
Website: [www.audiocodes.com](http://www.audiocodes.com)

©2012 AudioCodes Ltd. All rights reserved. AudioCodes, AC, HD VoIP, HD VoIP Sounds Better, IPmedia, Mediant, MediaPack, OSN, SmartTAP, VMAS, VolPerfect, VolPerfectHD, Your Gateway To VoIP and 3GX are trademarks or registered trademarks of AudioCodes Limited. All other products or trademarks are property of their respective owners. Product specifications are subject to change without notice.

Ref # LTRM-40014 08/12 V.11

