

# RXV200 MTR on Android™ Compute with RX-PAD Meeting Room Controller

Version 2.6



 **Microsoft**  
Solutions Partner  
Modern Work

 **audiocodes**



---

## Table of Contents

---

<b>1</b>	<b>Introduction .....</b>	<b>7</b>
1.1	Highlights .....	7
1.2	Benefits .....	8
1.3	Bundles .....	8
1.3.1	RXV200-B20 Bundle .....	9
1.3.2	RXV200-B360 Bundle .....	9
1.3.3	RXV200-B40 Bundle .....	10
1.3.4	RXV200-B70 Bundle .....	10
1.4	Hardware.....	11
1.5	Management.....	11
1.6	Specifications.....	11
1.6.1	RXV200.....	12
1.6.2	RX-PAD .....	13
1.6.3	RX15.....	13
1.6.4	RXVCAM50M.....	13
<b>2</b>	<b>Getting Started .....</b>	<b>15</b>
<b>3</b>	<b>Connecting to RXV200.....</b>	<b>17</b>
3.1	Signing in .....	17
3.1.1	Multi-Cloud Sign-in.....	17
3.1.2	Remote Provisioning and Sign in from Teams Admin Center .....	17
<b>4</b>	<b>Using General RXV200 Functions.....</b>	<b>21</b>
4.1	Customizing a Background.....	21
4.2	Configuring a Bundle .....	22
4.3	Managing Camera Presets.....	23
4.3.1	Configuring a Color Mode Preset on the RXVCAM50M Camera .....	25
4.4	Selecting the Default Audio Device .....	26
4.5	Starting a New Meeting .....	27
4.6	Dialing a Number .....	30
4.7	Enabling Proximity Join .....	31
4.8	Sharing a Whiteboard.....	32
4.9	Screen Sharing .....	35
4.10	Updating RXV200 Audio and Camera Peripherals Firmware.....	36
4.11	About Microsoft Teams.....	37
4.12	Signing out.....	38
4.13	Enrolling a Device with Intune Policies .....	38
4.13.1	Creating a Dynamic Group.....	38
4.13.2	Creating an Exclusion Group .....	38
4.14	Removing Devices from Intune admin center .....	39
<b>5</b>	<b>Getting Familiar with RXV200 Settings.....</b>	<b>45</b>
5.1	Device Admin Settings.....	48
5.1.1	Configuring Admin Login Timeout.....	48
5.1.2	Configuring Display .....	48
5.1.3	Configuring Date & Time.....	50
5.1.4	Configuring Wi-Fi .....	51
5.1.4.1	Connecting to an Available Wi-Fi Network.....	51
5.1.4.2	Manually Connecting to a Wi-Fi Network.....	52

5.1.5	Configuring Camera Settings .....	55
5.1.6	Selecting RXVCam70 PTZ Camera Tracking Mode .....	56
5.1.7	Selecting RXVCam360 Camera Tracking Mode .....	59
5.1.8	Limiting Resolution.....	63
5.1.9	Configuring Teams Admin Settings.....	64
5.1.10	Configuring Camera Frequency .....	65
5.1.11	Configuring UI Language & Input.....	66
5.1.12	Modifying IP Network Settings .....	67
5.1.13	Configuring Call Settings.....	70
5.2	User Settings .....	72
5.2.1	Setting the Volume.....	72
5.2.2	Configuring Accessibility Settings .....	72
5.2.3	Setting Live Captions .....	72
5.2.4	Enabling Display of Meeting Name using Exchange Online PowerShell .....	73
5.2.5	Hiding Names and Meeting Titles .....	74
5.2.6	Rebooting RXV200 .....	74
5.2.7	Viewing About RXV200.....	74
<b>6</b>	<b>Monitoring Modules Operational States.....</b>	<b>77</b>
<b>7</b>	<b>Debugging .....</b>	<b>79</b>
7.1.1.1	Log Settings   Collecting Logs .....	80
7.1.1.2	Remote Logging .....	82
7.1.1.3	Diagnostic Data .....	83
7.1.1.4	Reset configuration.....	84
7.1.1.5	Restart Teams app .....	84
7.1.1.6	Company Portal Login .....	84
7.1.1.7	Getting Company Portal Logs.....	84
7.1.1.8	Launch Mobile Teams.....	85
7.1.1.9	Debug Recording.....	85
7.1.1.10	Erase all data (factory reset).....	86
7.1.1.11	Screen Capture.....	86
7.2	Determining Device Status from LED Color Indications .....	87
7.3	Performing Recovery Operations using Power Button .....	88
7.4	Saving Logs while Device is in Recovery Mode .....	89
7.5	Restoring RXV200 Firmware via USB Disk .....	89

## List of Tables

Table 1-1: RXV200 Bundles .....	8
Table 1-2: RXV200 Specifications.....	12
Table 1-3: RX-PAD Specifications.....	13
Table 5-1: Configuration File Wi-Fi Parameters.....	53
Table 7-1: RXV200 Status.....	87
Table 7-2: Recovery Operations.....	88

## Notice

Information contained in this document is believed to be accurate and reliable at the time of printing. However, due to ongoing product improvements and revisions, AudioCodes cannot guarantee accuracy of printed material after the Date Published nor can it accept responsibility for errors or omissions. Updates to this document can be downloaded from <https://www.audiocodes.com/library/technical-documents>.

This document is subject to change without notice.  
Date Published: Nov-26-2024

## Security Vulnerabilities

All security vulnerabilities should be reported to [vulnerability@audiocodes.com](mailto:vulnerability@audiocodes.com).

## WEEE EU Directive

Pursuant to the WEEE EU Directive, electronic and electrical waste must not be disposed of with unsorted waste. Please contact your local recycling authority for disposal of this product.

## Customer Support

Customer technical support and services are provided by AudioCodes or by an authorized AudioCodes Service Partner. For more information on how to buy technical support for AudioCodes products and for contact information, please visit our website at <https://www.audiocodes.com/services-support/maintenance-and-support>.

## Stay in the Loop with AudioCodes



## Abbreviations and Conventions

Each abbreviation, unless widely used, is spelled out in full when first used.

## Related Documentation

Document Name
RXV81 RXV200 RX-PAD RX-PANEL Release Notes
RXV200 Microsoft Teams Rooms on Android Compute Unit Quick Installation Guide
RX-PAD Meeting Room Controller Quick Guide
RXVCAM70 PTZ Camera Quick Guide
RXVCam360 Video Conferencing Camera Quick Guide
One Voice Operation Center (OVOC) User's Manual
Device Manager Administrator's Guide

## Documentation Feedback

AudioCodes continually strives to produce high quality documentation. If you have any comments (suggestions or errors) regarding this document, please fill out the Documentation Feedback form on our website at <https://online.audiocodes.com/documentation-feedback>.

## Canada Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil n' doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radio apparatus containing digital circuitry which can function separately from the operation of a transmitter or an associated transmitter, shall comply with ICES-003. In such cases, the labelling requirements of the applicable RSS apply, rather than the labelling requirements in ICES-003. This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

### IC SAR Warning:

This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Lors de l' installation et de l' exploitation de ce dispositif, la distance entre le radiateur et le corps est d 'au moins 20 cm.

# 1 Introduction

The enterprise workspace and meeting space have changed dramatically over the past decade. Virtually all our communication today is hybrid, involving both on-site participants gathered in one or more meeting rooms and online participants located in their home offices or on the go. Modern meeting devices must be adaptable enough to accommodate any room size or shape, while minimizing the number of table-mounted accessories and devices apart from a microphone and a meeting room controller like the AudioCodes RX-PAD.

To meet this specific need, AudioCodes has created a range of RXV200 bundles which function as Microsoft Teams Rooms on Android devices.

The AudioCodes RXV200 MTR on Android Compute is a robust, dependable and adaptable solution that enables an easy upgrade of any component within the meeting room, thereby facilitating the adoption of new and advanced devices to keep up with latest technology trends without excessive expenditure. Together with the RX-PAD Meeting Room Controller, it provides an easy meeting room experience that significantly boosts productivity.

This Android compute MTR unit serves as the meeting room's nerve center and sits at the heart of the RXV200-B20 and RXV200-B40 bundles. It can be connected to a variety of cameras, audio sources and advanced AI applications.

Controlled by AudioCodes' RX-PAD Meeting Room Controller, the RXV200 offers innovative features such as one-click-to-join with an integrated calendar for easy collaboration initiation, smooth content sharing and simple camera adjustments for a complete hybrid experience.

See also AudioCodes website [here](#) for additional information.

## 1.1 Highlights

RXV200 feature highlights are:

- Multiple device support for mix-and-match adaptability
- Reliable Android compute unit for every room configuration
- Simple deployment and management
- Cost-effective and value for money
- Allows future addition and upgrade of peripherals (mix-and-match of video and audio devices)
- Comprehensive support for Microsoft Teams features is provided for a complete hybrid collaboration
- Intuitive meeting experience with calendar integration and click-to-join or proximity-join experience
- Users can hear audio notifications triggered by RX-PAD through the RXV200 speaker, including Talkback accessibility, ensuring a streamlined and accessible communication experience during meetings and collaboration sessions.
- HDMI Out CEC (Consumer Electronics Control) One-Touch-Play command, triggered by RX-PAD's human sensor, turns on/off the TV screen. See also [here](#) for more information.
  - When RX-PAD (pre-set to 'Screen timeout') enters sleep mode, it automatically triggers RXV200 to enter sleep mode as well, activating the CEC One-Touch-Play command to turn the TV off.
  - When RX-PAD's human sensor wakes up RX-PAD, RXV200 wakes up as well and turns the TV on.

## 1.2 Benefits

- Superb video quality provided by AudioCodes's RXVCam50 AI camera (4K, auto framing, EPTZ)
- Hear and be heard with crystal-clear sound
- Human sensor for activating the system and welcoming the user upon proximity
- An optimal solution for small to large meeting spaces
- Optional centralized management with AudioCodes' OVOC
- Fully controllable by the RX-PAD Meeting Room Controller center-of-room intelligent touch controller

## 1.3 Bundles

The RXV200 supports multiple devices for mix-and-match adaptability and simplified deployment and management.

RXV200 bundles provide a reliable solution for every room layout and allow easy meeting room component upgrades.

The RXV200 is available in five main bundles.

**Table 1-1: RXV200 Bundles**


Name of Bundle	Description
RXV200-B05	<ul style="list-style-type: none"> <li>■ Leverages RX-PAD to enable integration of an existing conference room AV system with Microsoft Teams. Connects to an existing audio-video conference system.</li> <li>■ Any room size</li> <li>■ Any number of participants</li> </ul>
RXV200-B20	<ul style="list-style-type: none"> <li>■ RX-PAD</li> <li>■ RXVCam50</li> <li>■ RX15 (audio)</li> <li>■ Small rooms of up to 10 participants</li> <li>■ See schematic diagram <a href="#">below</a></li> </ul>
RXV200-B360	<ul style="list-style-type: none"> <li>■ RX-PAD</li> <li>■ RXVCam360 (video   audio)</li> <li>■ Small-medium size rooms of 2-8 participants</li> <li>■ Productivity: Meeting Insights</li> <li>■ See schematic diagram <a href="#">below</a></li> </ul>
RXV200-B40	<ul style="list-style-type: none"> <li>■ RX-PAD</li> <li>■ RXVCam50</li> <li>■ RX40 (audio)</li> <li>■ Medium size rooms of 6-12 participants</li> <li>■ Productivity: Meeting Insights</li> <li>■ See schematic diagram <a href="#">below</a></li> </ul>
RXV200-B70	<ul style="list-style-type: none"> <li>■ RX-PAD</li> <li>■ RXVCam70</li> <li>■ RX40 (audio)</li> <li>■ Large rooms of 10-18 participants</li> <li>■ Productivity: Meeting Insights</li> <li>■ See schematic diagram <a href="#">below</a></li> </ul>



### 1.3.1 RXV200-B20 Bundle


The figure below illustrates the RXV200-B20 bundle.

### Figure 1-1: RXV200-B20

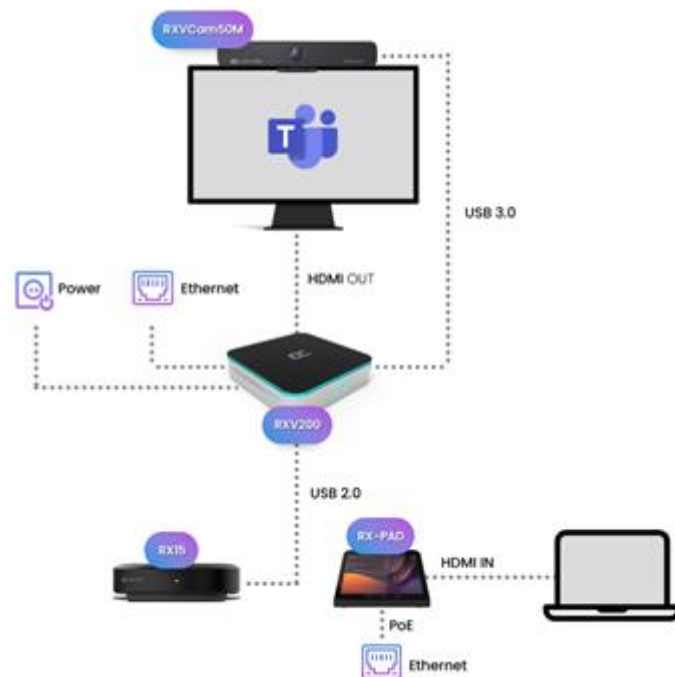

### 1.3.2 RXV200-B360 Bundle


### Figure 1-2: RXV200-B360

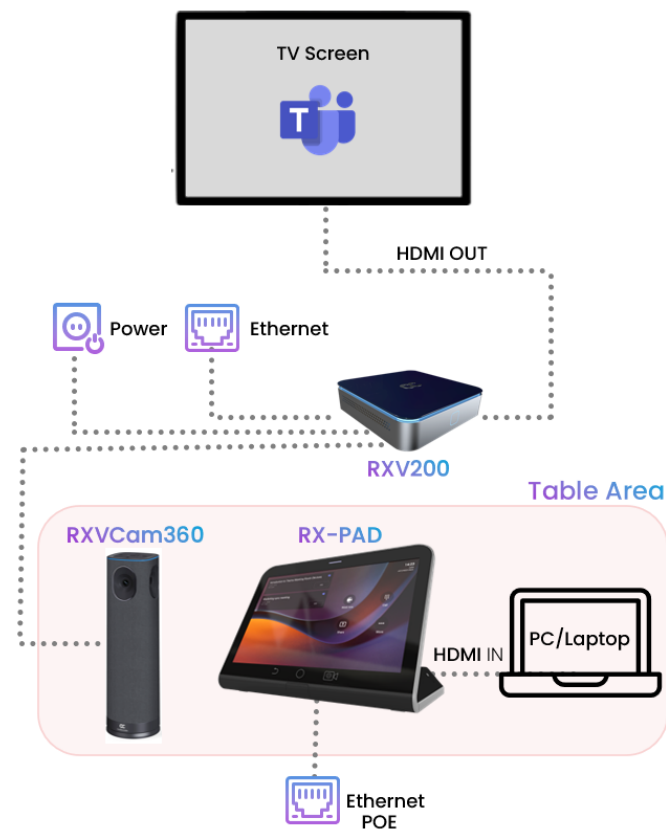

### 1.3.3 RXV200-B40 Bundle


The figure below illustrates the RXV200-B40 bundle.

Figure 1-3: RXV200-B40

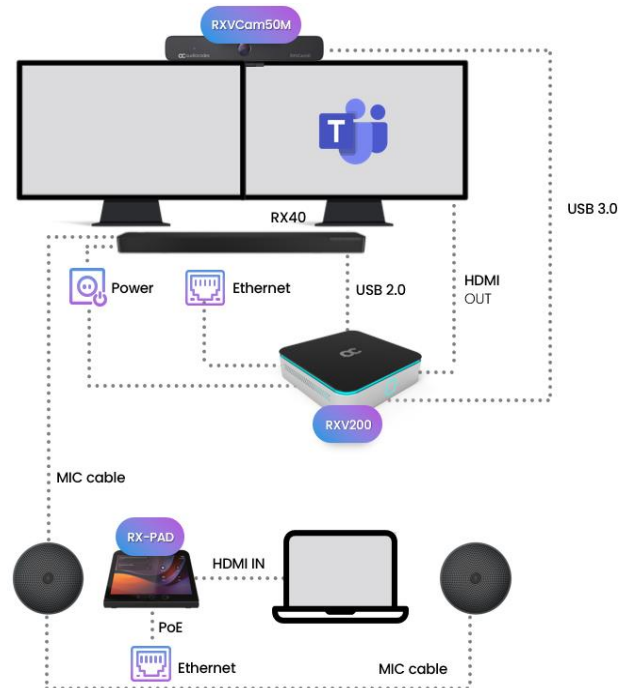

### 1.3.4 RXV200-B70 Bundle

Figure 1-4: RXV200-B70

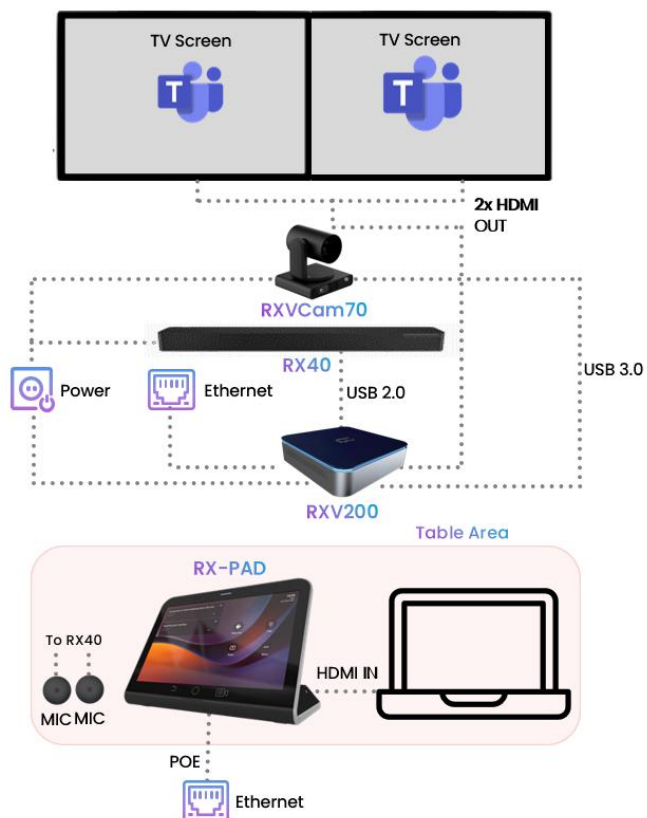

## 1.4 Hardware

The RXV200's plug-and-play simplicity makes it easy to connect a screen, sound system, AI camera with auto-framing to simplify Microsoft Teams physical whiteboard sharing, all controlled by a meeting room controller.

- HDMI In enables participants to share their desktop during a meeting via a simple cable connection
- 4K HDMI Out enables users to seamlessly connect and display ultra-high-definition visuals in compatible external displays during Teams meetings, ensuring a visually immersive and crystal-clear collaboration experience. Whether you're presenting a slideshow, streaming content, or simply extending your display, 4K HDMI Out enhances the overall viewing experience.
- 1 x USB C and 4 x USB A to connect camera and audio peripherals

**Note:** RXV200 supports a single display *irrespective of whether it's connected to HDMI1 or HDMI2*:

- When RXV200 boots up, if a single TV screen is connected to RXV200, it can be connected to either HDMI1 or to HDMI2. This TV screen will function as the primary screen irrespective of whether it is connected to HDMI1 or HDMI2.
- If after that another TV screen is connected to the available HDMI port on RXV200, this TV screen will become the secondary screen.
- If two TV screens are connected to RXV200 prior to boot up, the TV screen connected to HDMI1 will be used as the primary screen while the other TV screen will be used as the secondary screen.



## 1.5 Management

RXV200 bundles are managed using AudioCodes' One Voice Operations Center (OVOC) Device Manager or Microsoft's Teams admin center (TAC), enabling IT admins to monitor and upgrade the devices from anywhere. Using OVOC, IT admins can easily monitor and manage all bundled devices from a centralized location. Management includes:

- Firmware management / upgrade
- Alarm management
- Upgrade the MTR APK

Admins can monitor the status of the device's software modules from the System State page as shown [here](#).



**Note:** Firmware *downgrade* is blocked as of version 2.6.280 to prevent a possible race condition (conflict) between Microsoft Teams admin center (TAC) and AudioCodes' OVOC | Device Manager.

## 1.6 Specifications

The powerful RXV200 Android compute unit is suited to every room configuration. The device supports:

- Multiple cameras
  - Modular design allows connecting any current and future peripherals
  - AudioCodes's RXVCam50M camera (4K, auto framing, EPTZ)
- Dual screen support
- Audio: RX40 sound bar or RX15 speakerphone
- Advanced AI capabilities
- Fully controllable by RX-PAD center-of-room intelligent touch controller

- RX-PAD includes proximity sensor for activating the system and welcoming users
- HDMI In enables participants to share their desktop content during a meeting via a simple cable connection
- 4K HDMI Out support

## 1.6.1 RXV200

The table shows RXV200 specifications.

**Table 1-2: RXV200 Specifications**

Feature	Description
HDMI Outputs	<ul style="list-style-type: none"> <li>■ 2 x 4K HDMI Outputs to external screens</li> </ul>
HDMI Input type	<ul style="list-style-type: none"> <li>■ HDMI 2.0 Input (including audio)</li> </ul>
Network provisioning	<ul style="list-style-type: none"> <li>• TCP/IP (IPv4), DHCP/ static IP; Time and date synchronization via SNTP; VLAN support; QoS support: IEEE 802.1p/Q tagging (VLAN)</li> <li>• Layer 3 TOS and DSCP RTCP support: (RFC 1889)</li> <li>• IP address configuration: TCP/IP (IPv4), DHCP/static IP; Time and date synchronization: SNTP</li> <li>■ QoS support: IEEE 802.1p/Q tagging (VLAN), Layer 3 TOS and DSCP RTCP support: (RFC 1889)</li> </ul>
Performance	<ul style="list-style-type: none"> <li>• PROCESSOR</li> <li>• Snapdragon™ QCS8250</li> <li>• MEMORY</li> <li>• LPDDR5, 8G</li> <li>• STORAGE</li> <li>• UFS3.1, 128G</li> <li>• GRAPHICS</li> <li>■ Adreno™ 650</li> </ul>
Device interfaces	<ul style="list-style-type: none"> <li>■ Ethernet: 10/100/1000 Mbps (RJ-45) network interface</li> <li>■ Wi-Fi (dual band support)</li> <li>■ Support 802.11 a/b/g/n/ac/ax</li> <li>■ Bluetooth 5.1</li> <li>■ Proximity join and casting via Bluetooth</li> <li>■ Interfaces: USB 3.0 for audio and video peripherals. Four are Type A, one is Type C</li> <li>■ 12V/3A DC power input</li> </ul>
Wi-Fi type	<ul style="list-style-type: none"> <li>■ Dual band Wi-Fi</li> </ul>
Chipset type	<ul style="list-style-type: none"> <li>■ Latest chipset from QUALCOMM for video/conf applications</li> </ul>
OS	<ul style="list-style-type: none"> <li>■ Android 10</li> </ul>
UC platform support highlights	<p>Microsoft Teams Room for Android application with:</p> <ul style="list-style-type: none"> <li>• Intuitive meeting experience with calendar integration and click-to-join or proximity-join experience</li> </ul>
Security	<ul style="list-style-type: none"> <li>• Encryption: TLS (Transport Layer Security), SRTP encryption for media, AES256 Network Access Control: IEEE 802.1x</li> <li>• Built-in certificate</li> <li>■ Kensington Lock for security measures</li> </ul>
Design	<ul style="list-style-type: none"> <li>■ DIMENSIONS (W X D X H) 170 x 170 x 41.4 mm</li> <li>■ WEIGHT 0.987 kg</li> </ul>
Manageability	<ul style="list-style-type: none"> <li>■ AudioCodes One Voice Operation Center (OVOC)   Device Manager</li> </ul>

## 1.6.2 RX-PAD

Following are the RX-PAD specifications.

**Table 1-3: RX-PAD Specifications**

Feature	Description
Display	Landscape Touch 8" LCD (1280 x 800 resolution)
Device interfaces	<ul style="list-style-type: none"><li>• Ethernet: 10/100/1000 Mbps (RJ-45) network interface (PoE)</li><li>• Wi-Fi (dual band support)</li><li>• Bluetooth 5.0</li><li>• 12V/3A DC power input</li><li>• Proximity Sensor</li></ul>
Network provisioning	<ul style="list-style-type: none"><li>• TCP/IP (IPv4), DHCP/ static IP; Time and date synchronization via SNTP; VLAN support; QoS support: IEEE 802.1p/Q tagging (VLAN)</li><li>• Layer 3 TOS and DSCP RTCP support: (RFC 1889)</li><li>• IP address configuration: TCP/IP (Ipv4), DHCP/static IP; Time and date synchronization: SNTP</li></ul>
OS	Android 12

## 1.6.3 RX15

See AudioCodes website [here](#) for the RX15 specifications.

## 1.6.4 RXVCAM50M

See AudioCodes website [here](#) for the RXVCAM50M specifications.

This page is intentionally left blank.

## 2 Getting Started

**Note:** See the *RXV200 Microsoft Teams Rooms on Android Compute Unit Quick Installation Guide* shipped with the product or available from AudioCodes for how to get started, including:



- Package contents checklist
- Positioning
- Mounting
- Cabling
- Powering up



This page is intentionally left blank.



## 3 Connecting to RXV200




**Note:** For more information about connecting the RXV200, refer to the [RXV200 Microsoft Teams Rooms on Android Compute Unit Quick Installation Guide](#) shipped with the product or available from AudioCodes for information about connecting the RXV200.

After mounting and cabling RXV200, pair it with RX-PAD (see the guide *Pairing RX-PAD with Teams Rooms on Android AudioCodes Devices*).


### 3.1 Signing in

Users are provided by default with the option to sign in from any browser or smartphone with a prominent device code. If you choose to sign in from the device, you can enter your username and password on-screen via the device keyboard.

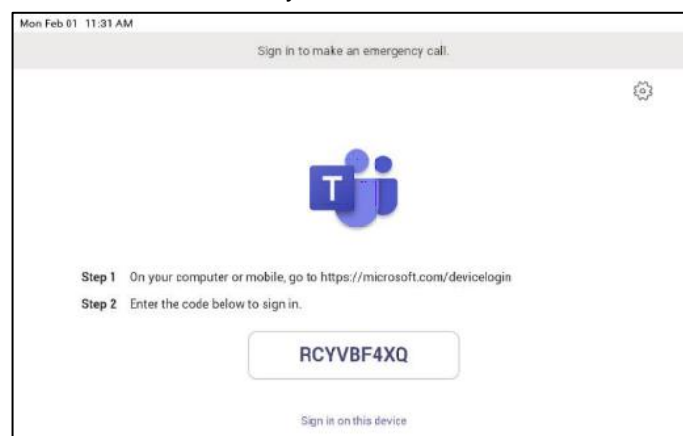

#### 3.1.1 Multi-Cloud Sign-in

For authentication into specialized clouds, the network administrator can choose the Settings gear on the sign-in page to see the options that are applicable to their tenant.

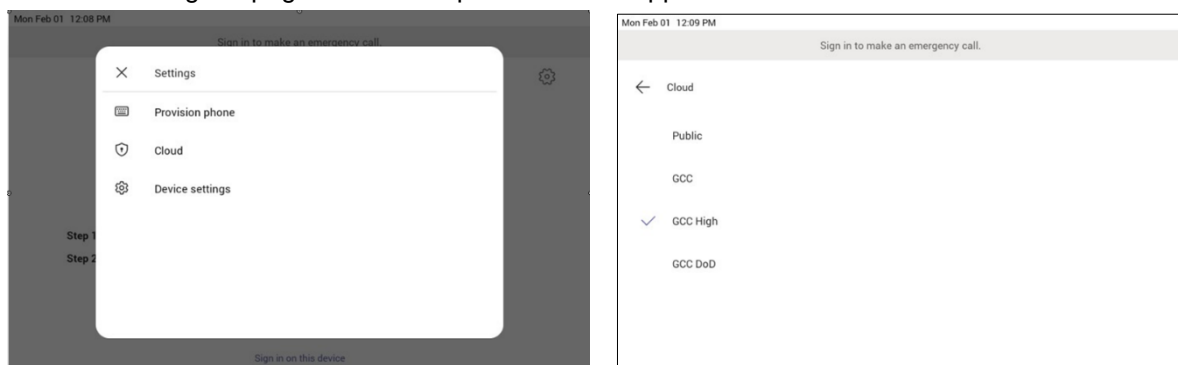

#### 3.1.2 Remote Provisioning and Sign in from Teams Admin Center

See [Remote provisioning and sign in for Teams Android devices - Microsoft Teams | Microsoft Docs](#) for more information.


IT admins can remotely provision and sign in to a Teams device.

To provision a device remotely, the network administrator needs to upload the MAC IDs of the devices being provisioned and create a verification code. The entire process can be completed remotely from the Teams admin center.

*Step 1: Add a device MAC address*

Provision the device by imprinting a MAC address on it.

1. Sign in to the Teams admin center.
2. Expand **Devices**.
3. Select **Provision new device** from the **Actions** tab.

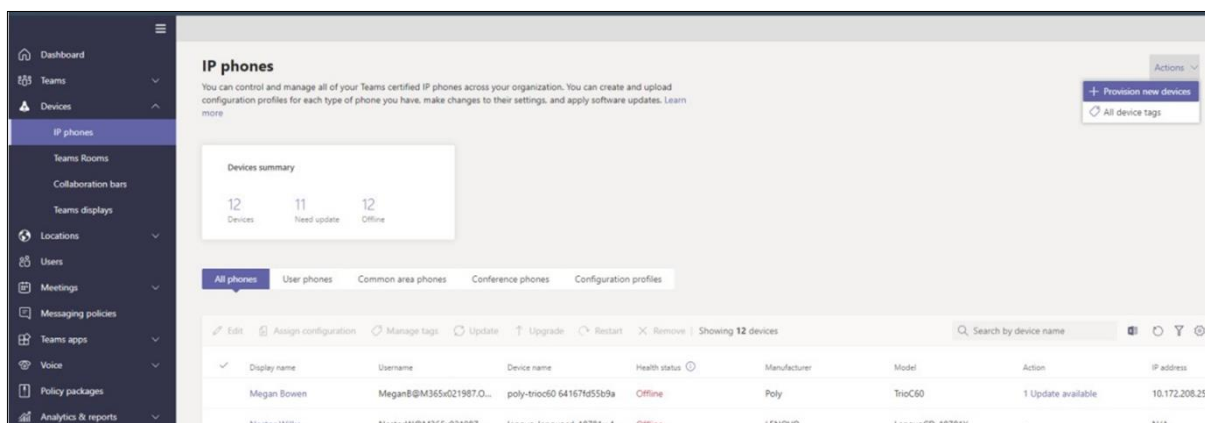

In the 'Provision new devices' window, you can either add the MAC address manually or upload a file.

Manually add a device MAC address

1. From the **Awaiting Activation** tab, select **Add MAC ID**.
2. Enter the MAC ID.
3. Enter a location, which helps technicians identify where to install the devices.
4. Select **Apply** when finished.


Upload a file to add a device MAC address

1. From the **Awaiting Activation** tab, select **Upload MAC IDs**.
2. Download the file template.
3. Enter the MAC ID and location, and then save the file.
4. Select the file, and then select **Upload**.

*Step 2: Generate a verification code*

You need to generate a verification code for the devices. The verification code is generated in bulk or at the device level and is valid for 24 hours.


- From the **Awaiting Activation** tab, select an existing MAC ID. A password is created for the MAC address and is shown in the **Verification Code** column.

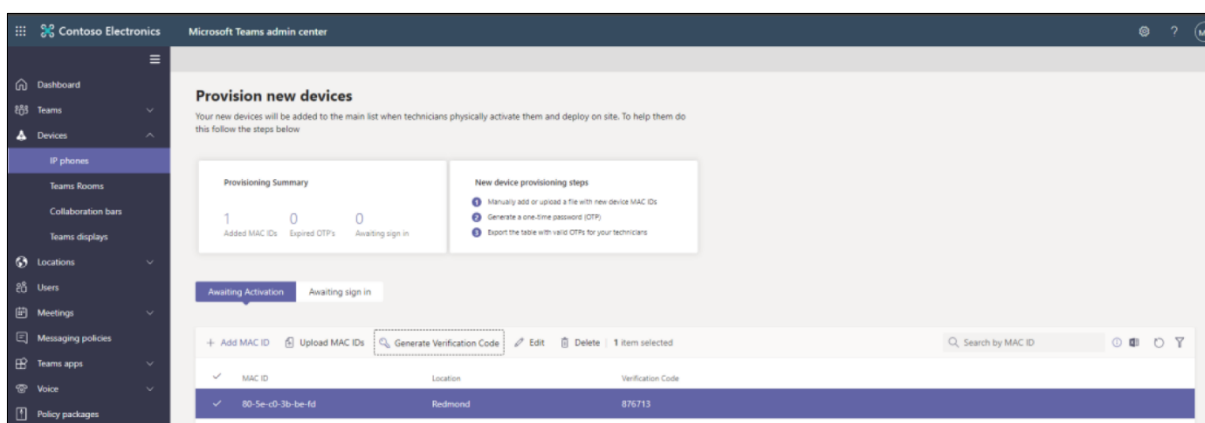


You'll need to provide the list of MAC IDs and verification codes to the field technicians. You can export the detail directly in a file and share the file with the technician who is doing the actual installation work.

*Step 3: Provisioning on the device*

Once the device is powered up and connected to the network, the technician provisions the device by choosing the 'Settings' gear on the top right of the new 'Sign in' page and selecting **Provision phone**.

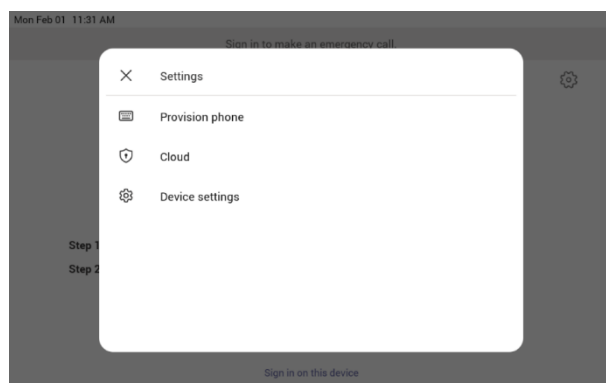


The technician is then expected to enter the device-specific Verification code that was provided in the Teams admin center on the phone's user interface. Once the device is provisioned successfully, the tenant name will be available on the sign in page.

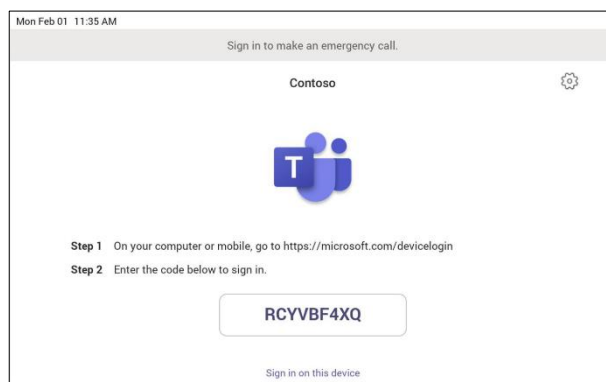



#### Step 4: Sign in remotely

The provisioned device appears in the Awaiting sign in tab. Initiate the remote sign-in process by selecting the individual device.


1. Select a device from the **Awaiting sign in** tab.
2. Follow the instructions in **Sign in a user**, and then select **Close**.

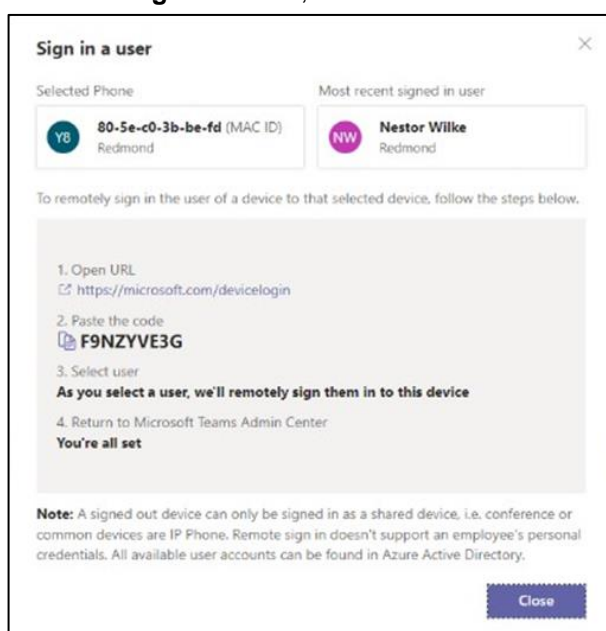

The tenant admin is expected to complete authentication on the device from any browser or smartphone.

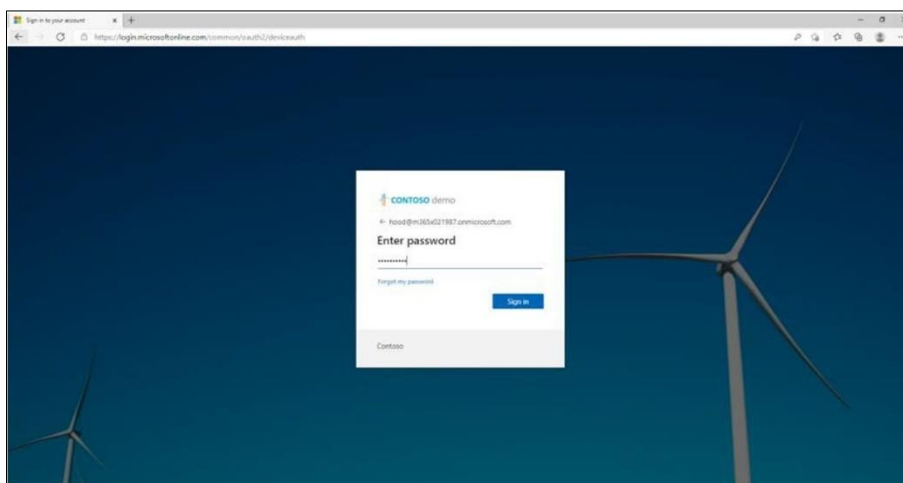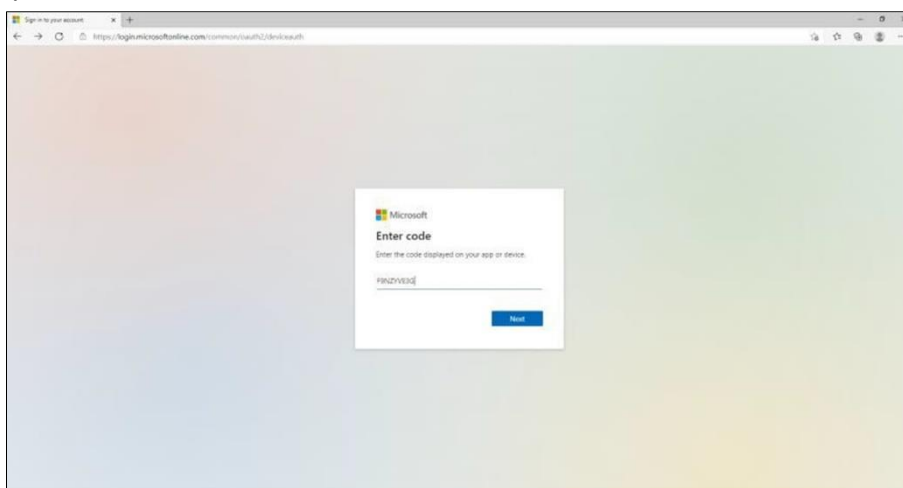

When the tenant admin is signing in from Teams Admin Center, the user interface on the device is blocked to prevent other actions on the phone.

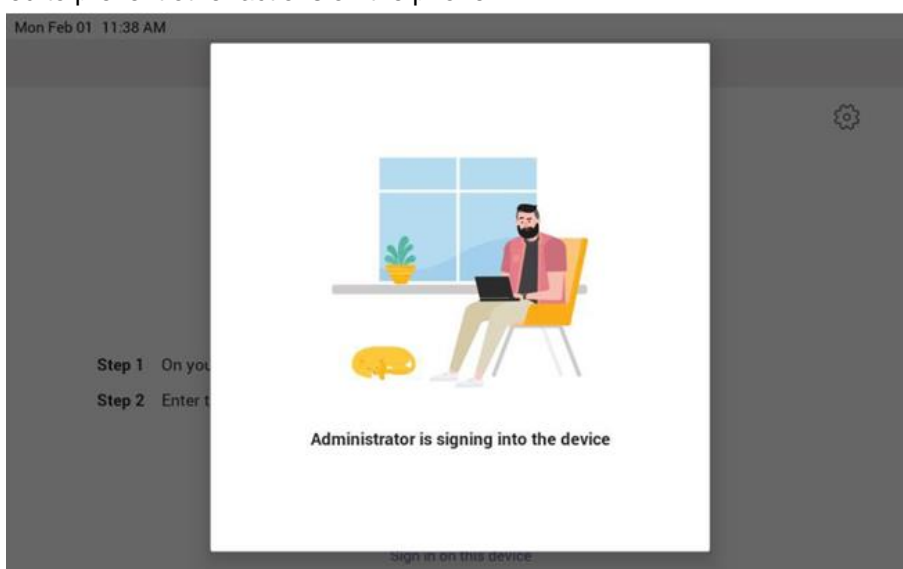


## 4 Using General RXV200 Functions

This section shows how to use general RXV200 functions.

➤ **To get started:**

1. After signing in, view the RXV200 home page.

**Figure 4-1: Home Page**

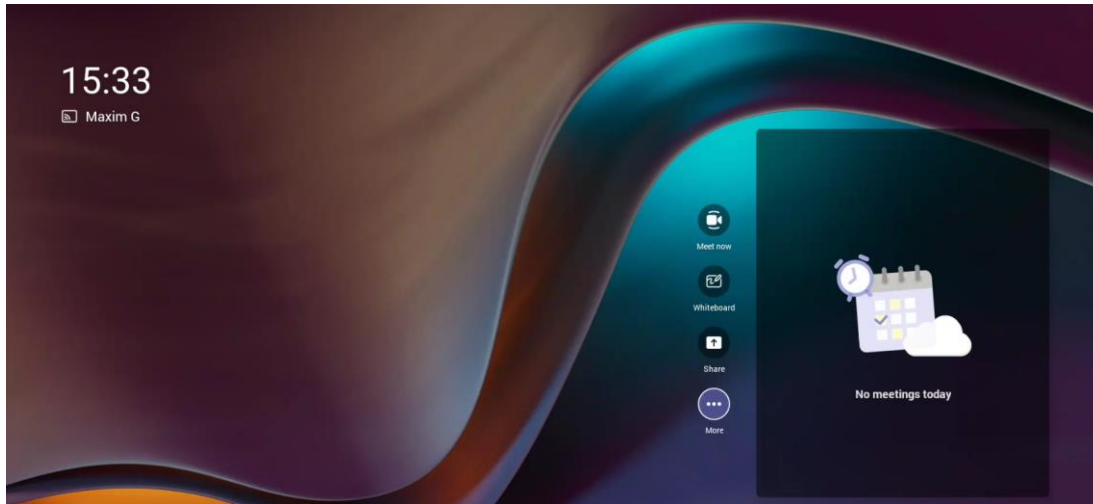

### 4.1 Customizing a Background



**Note:** This feature is only available with the Teams Rooms Pro license **Pro**

Admin can upload custom background images on the Teams admin center to reinforce their company brand on their Teams Rooms on Android devices.

The main room display, extended room display, and touch console can each have their own specific background image.

PNG, JPG, and JPEG formats are supported.

See also [here](#) for more information.

## 4.2 Configuring a Bundle


Admin can configure one of five bundles depending on the solution the enterprise acquired.

See [here](#) for more information about available bundles.

Admin can configure the bundle via RX-PAD and/or the RXV200 UI.

### ➤ To configure a bundle:

1. Open the Bundle page (**Settings > Bundle**).

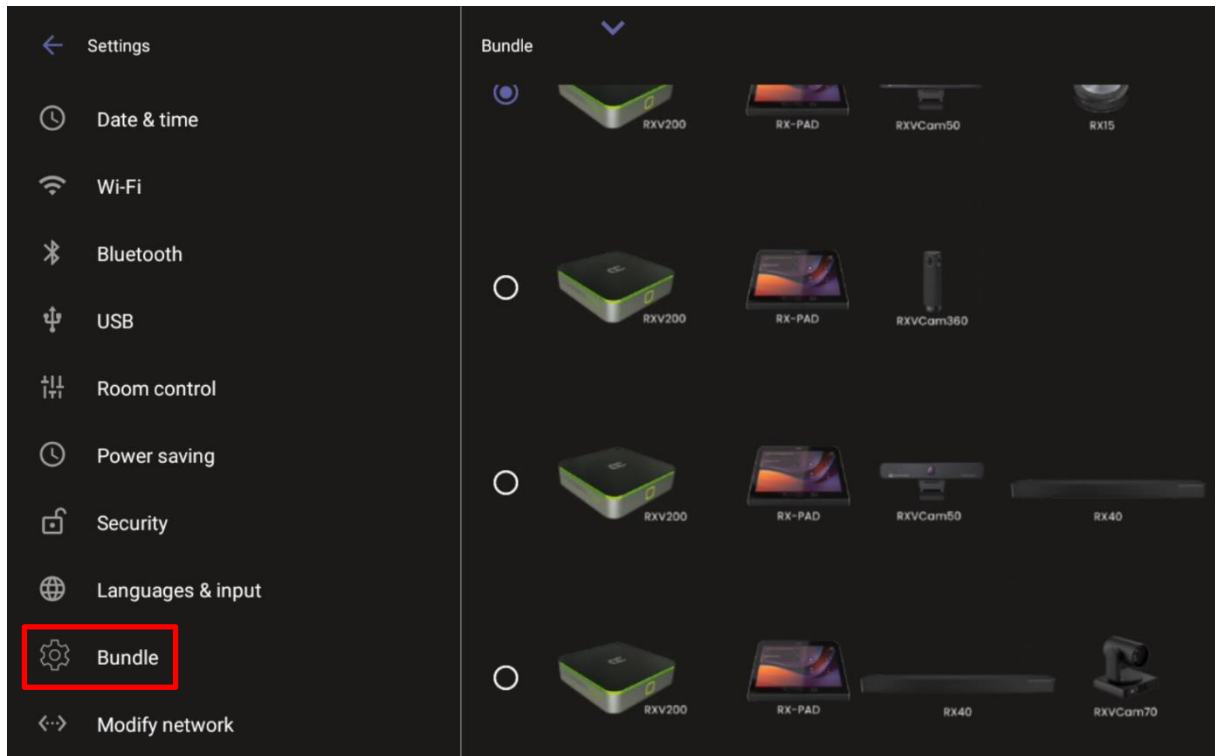

2. Select the bundle the enterprise acquired. The preceding figure shows RXV200 + RX-PAD + RXV200 + RX40 as the selected bundle.


## 4.3 Managing Camera Presets

You can adjust RXV200 camera presets to suit your preferences.

➤ **To access RXV200 camera presets:**

1. On RX-PAD, touch the camera button.

**Figure 4-2: Camera Settings**

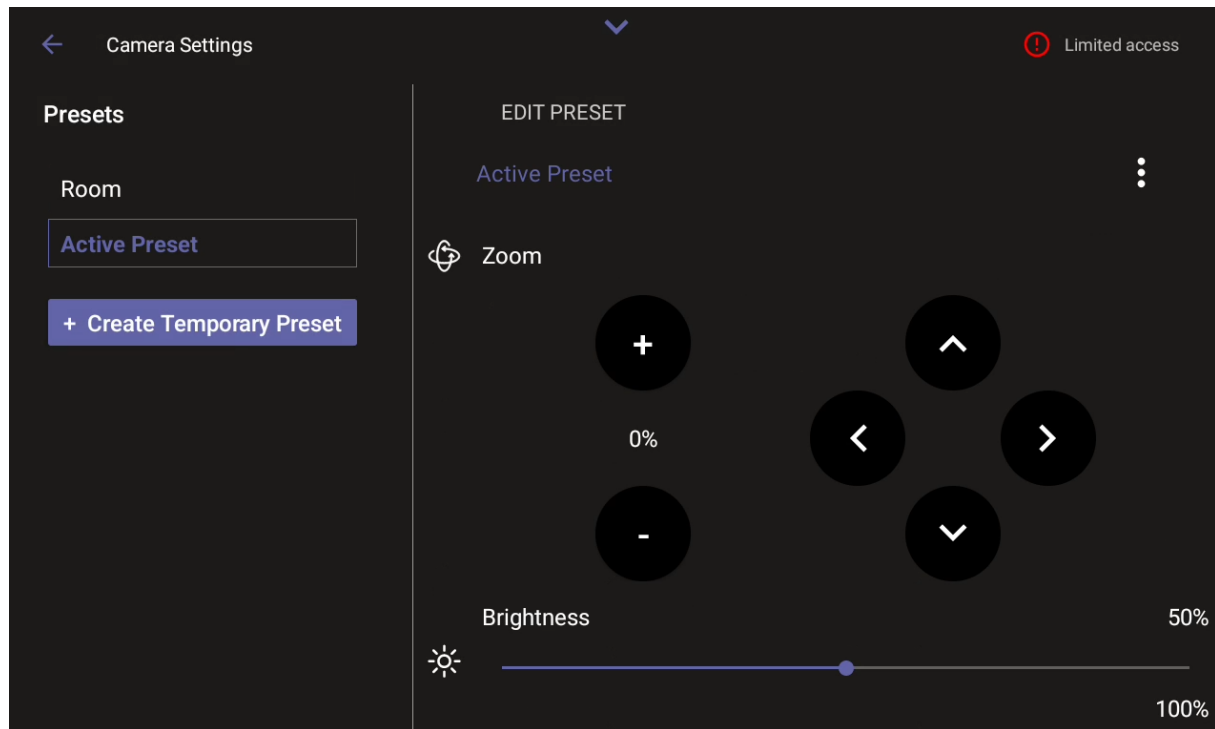

**Note:** The default **Room** preset enables you to capture all participants and actions in a meeting room.

2. Touch the **Create Temporary Preset** option (while in an ongoing meeting) | Touch the **Create New Preset** option if the device is in idle state.
3. Configure the PTZ settings you want.




**Note:**

- If you configure a preset (for example) to zoom in and focus on a whiteboard in the meeting room, users in a video call-meeting can switch to it and later switch back to the default **Room** preset or any other defined preset.
- Users can easily toggle between presets according to their requirements per call.

4. [Optionally] Edit a preset.
5. [Optionally] Click the vertical ellipsis and then from the pop-up menu select the **Restore** option to return camera settings to their defaults.

Figure 4-3: Restore

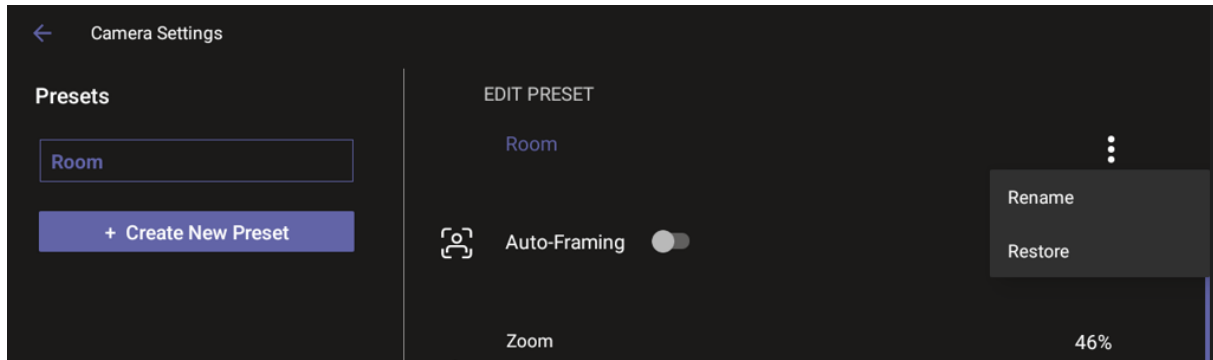

**Note:**

- During a meeting, any user can create a temporary preset; when the meeting ends, that preset is automatically deleted.
- Admins can create presets when the device is in idle mode (and the presets will be saved). Users cannot.
- **Camera Settings** can be changed during a meeting without turning off the video to remote parties.
- **Camera Settings** can optionally be accessed from RXV200's **Device Settings** though admin permissions are necessary.




### 4.3.1 Configuring a Color Mode Preset on the RXVCAM50M Camera

When RXV200 is connected to the AudioCodes RXVCAM50M camera, users can configure a Color Mode preset from RX-PAD.

Users can configure either:

- Default
- Normal
- Clarity
- Bright
- Soft

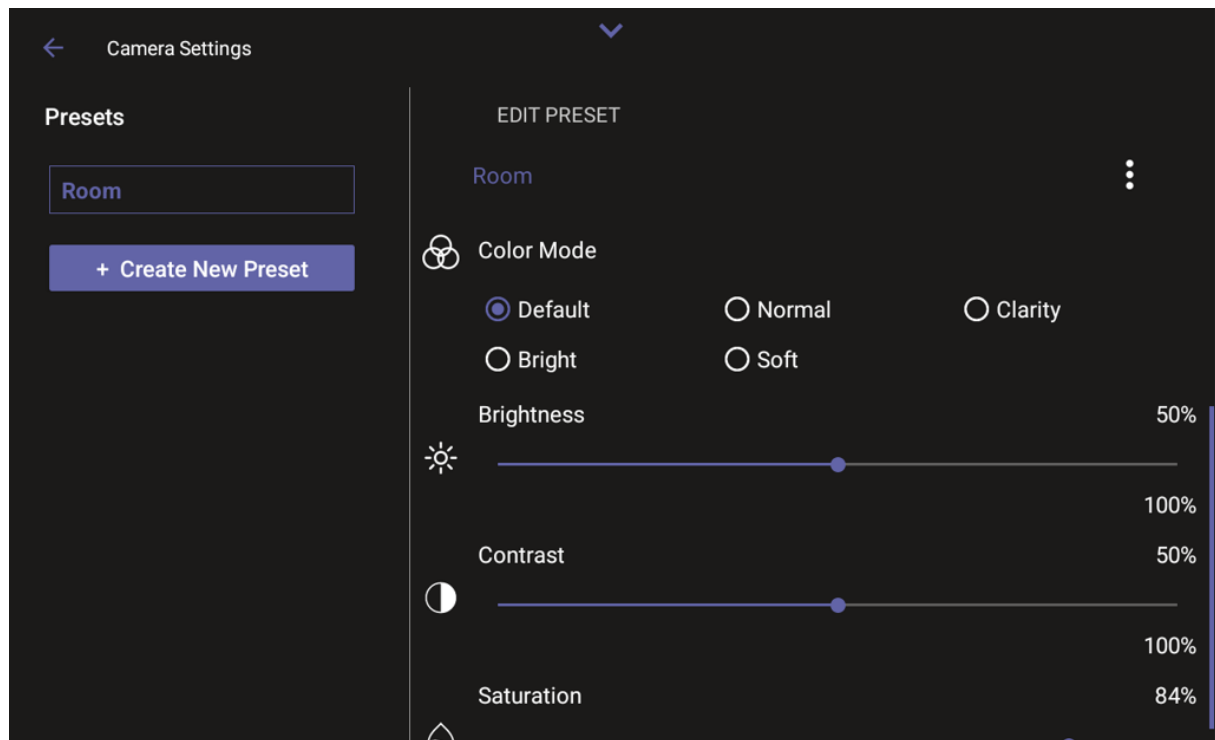

Each Color Mode preset incorporates the following attributes:


- **Default:** Brightness - 50, Contrast - 50, Saturation - 70
- **Normal:** Brightness - 50, Contrast - 50, Saturation - 70
- **Clarity:** Brightness - 60, Contrast - 50, Saturation - 60
- **Bright:** Brightness - 50, Contrast - 50, Saturation - 70
- **Soft:** Brightness - 50, Contrast - 50, Saturation - 60

## 4.4 Selecting the Default Audio Device

Admin can select the default audio device if there's more than one audio device option available.

➤ To select the default audio device:

1. Open the Sound page (**Device settings** > **Sounds**).

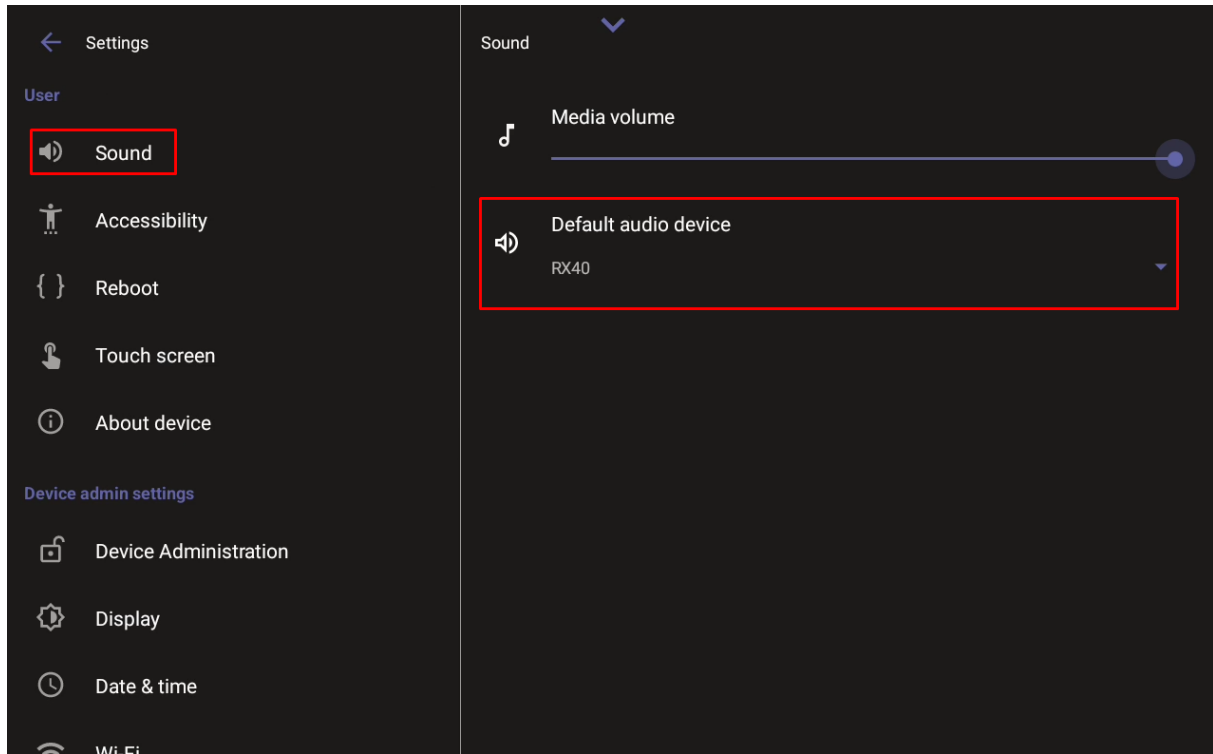


2. From the 'Default audio device' drop-down, select the default device.

## 4.5 Starting a New Meeting

➤ **To start a new meeting:**


3. In the home screen, navigate to and select the **Meet Now** option.

**Figure 4-4: New meeting – Invite someone**

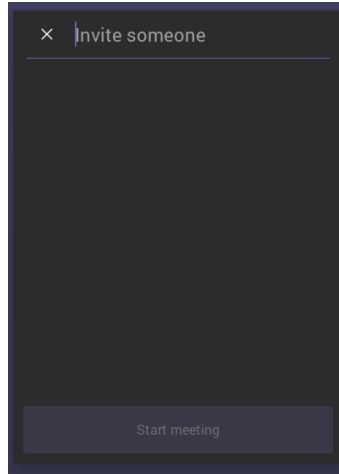


4. In the 'Invite someone' field, enter the name of a person to invite; after entering the first letters in the name, matching contacts from directory are displayed.

**Figure 4-5: New meeting – Enter the name of a person**

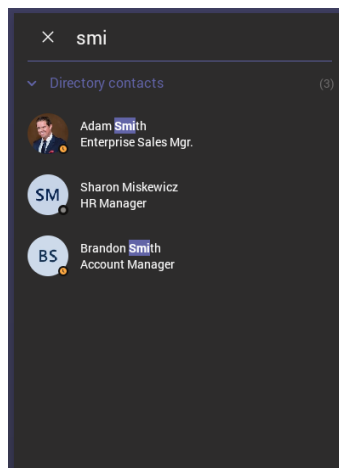

5. Select the name of the person to invite.


Figure 4-6: New meeting – Select the name of a person

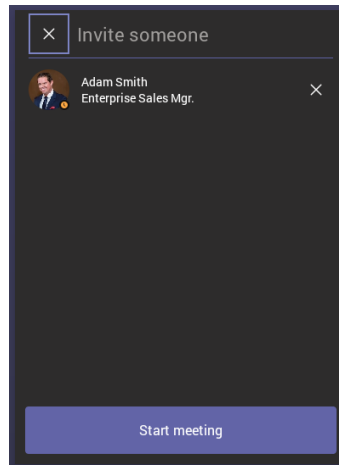



6. Invite someone else – or others – and then select **Start meeting**.



**Note:** The server allocates a meeting ID number and sends an invite message to all participant devices. All devices simultaneously indicate an incoming call (the 'Calling' screen is displayed). The server manages every aspect of the call.

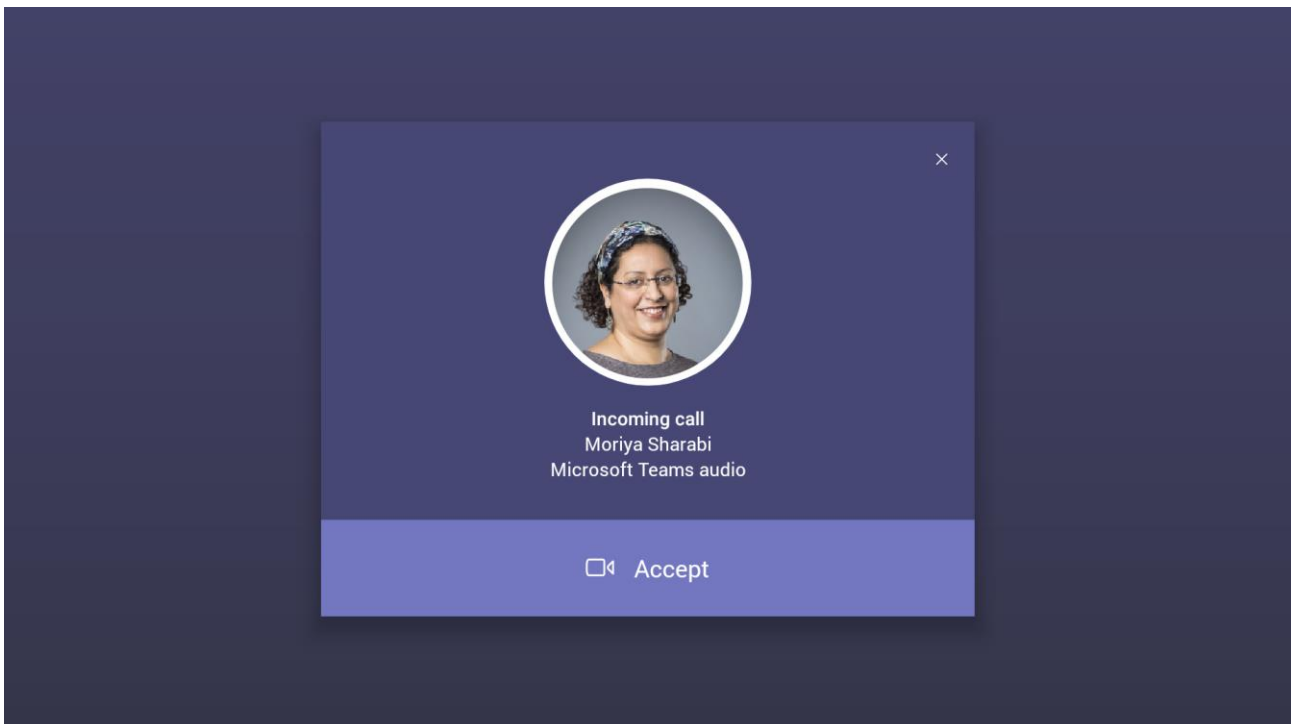

7. Select **Accept**. Note that according to the icon in the 'Incoming call' screen shown in the preceding figure, the caller has video capability.

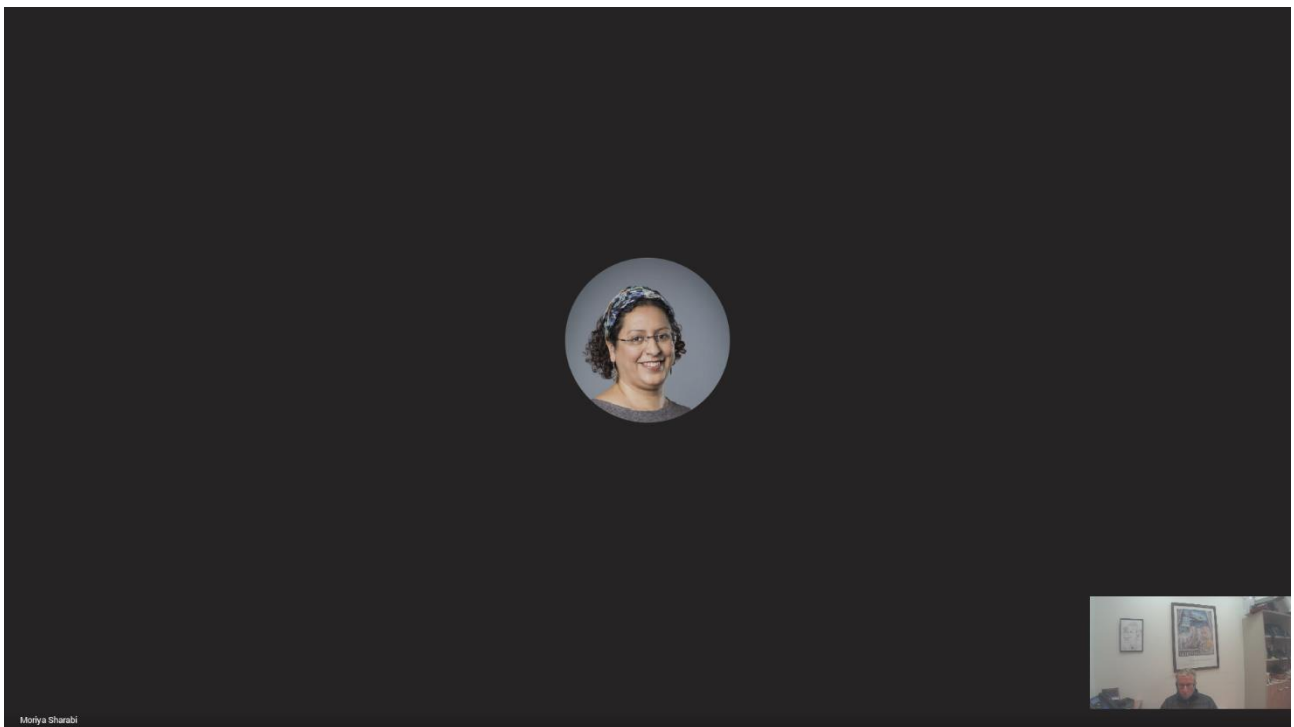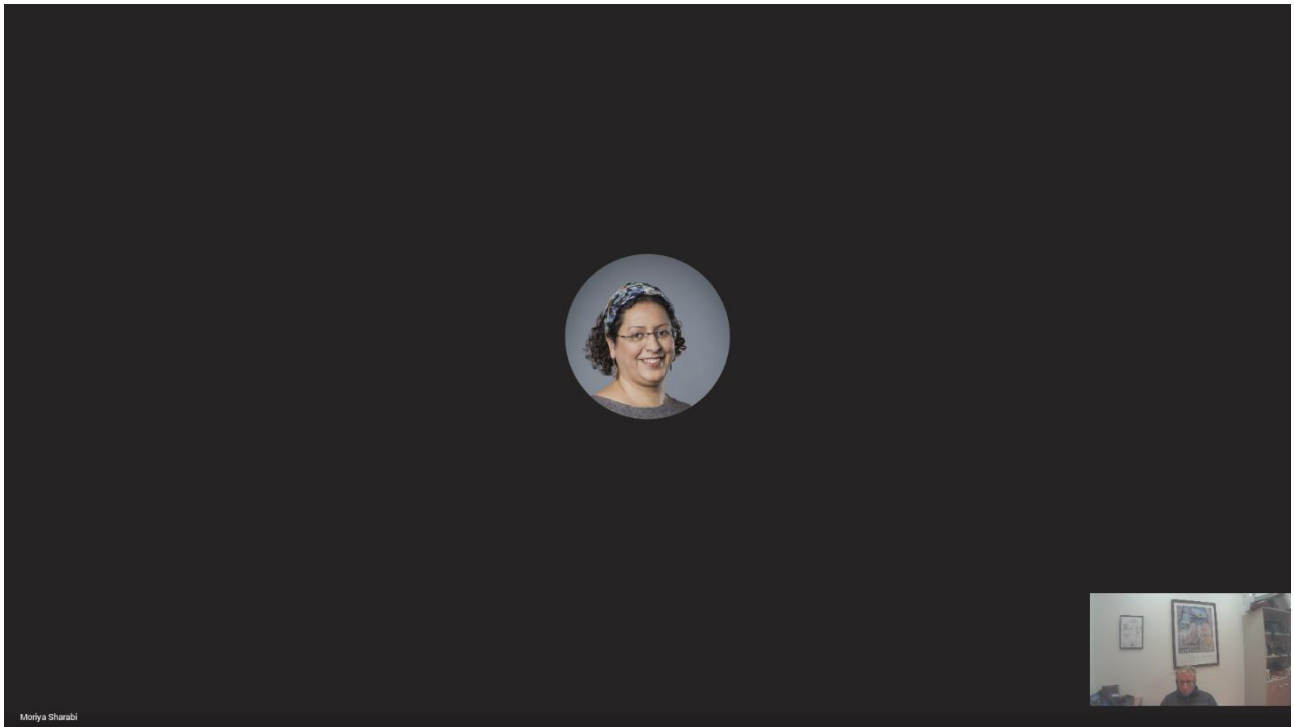


## 4.6 Dialing a Number

You can manually dial someone's phone number.

➤ **To dial a phone number:**

1. In the home screen, navigate to and select the **Dial pad** option.

**Figure 4-7: Dial pad**

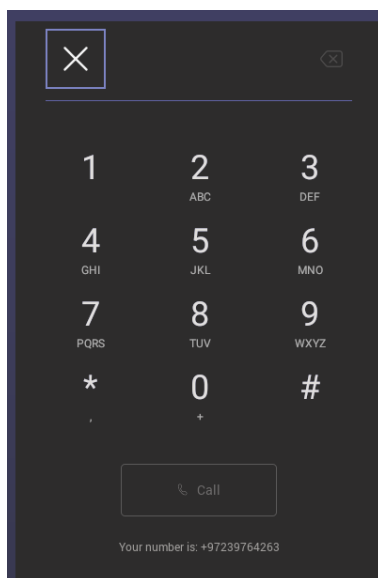


2. Enter the digits of the destination to call and select **Call**.

## 4.7 Enabling Proximity Join

'Proximity Join' allows you to discover and add a nearby, available Microsoft Teams Room, i.e., the RXV200, in this case, to any meeting. It's also possible to accept the incoming meeting on the console of the room.


The feature functions in combination with Bluetooth and 'Bluetooth Beacons', an integral feature in Microsoft Teams Rooms (MTRs). The MTR device is RXV200. If you bring a laptop or a Teams Mobile Client near the RXV200, it'll offer the RXV200 as the room audio device. The figure below shows how to select the room audio device.

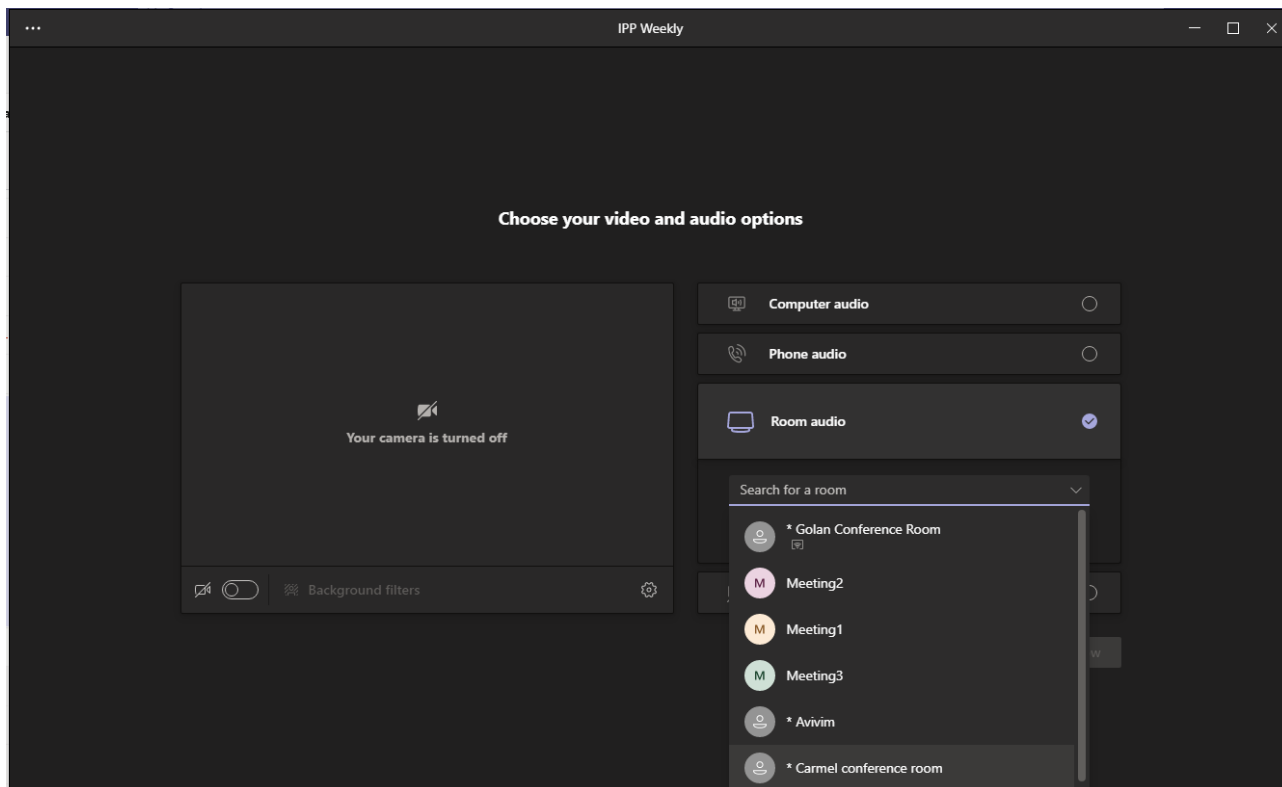

After you select the room audio device, the meeting is opened without any audio device on your PC client, and then the room meeting device (RXV200) gets a request to join the meeting.

### ➤ To enable 'Proximity join':

- In the Settings screen, navigate to and select **Proximity join**. If it's disabled, it'll become enabled and vice versa.

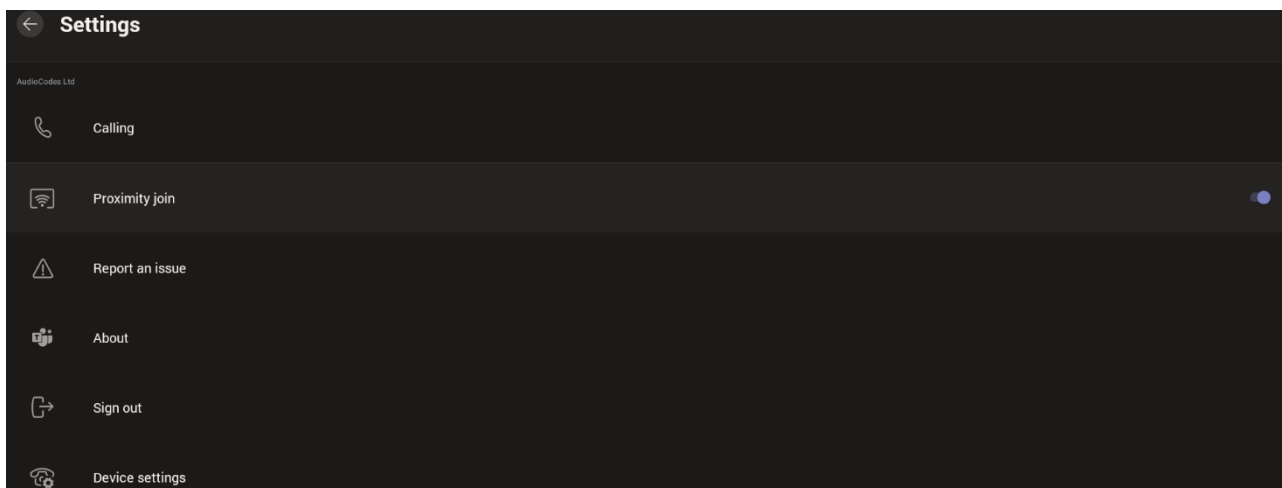


## 4.8 Sharing a Whiteboard


Teams meetings on the RXV200 allow participants to open a virtual whiteboard – a digital canvas - on which they can sketch, illustrate, collaborate, brainstorm, plan, and share perspectives with one another in real time. The focus switches away from the presenting participant to the whiteboard. For more information about this Microsoft feature, see [here](#).

### ➤ To share the Whiteboard:

1. From the ... menu (in the MTRA GUI), select **Share Whiteboard**.

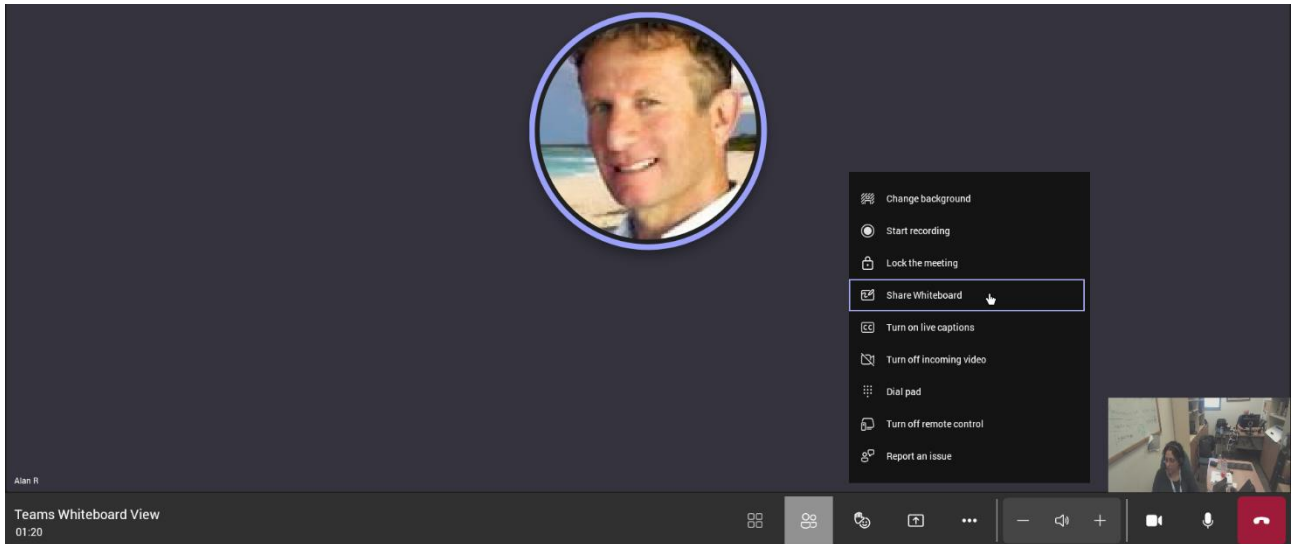


2. Alternatively, access the Whiteboard from **Share content**:

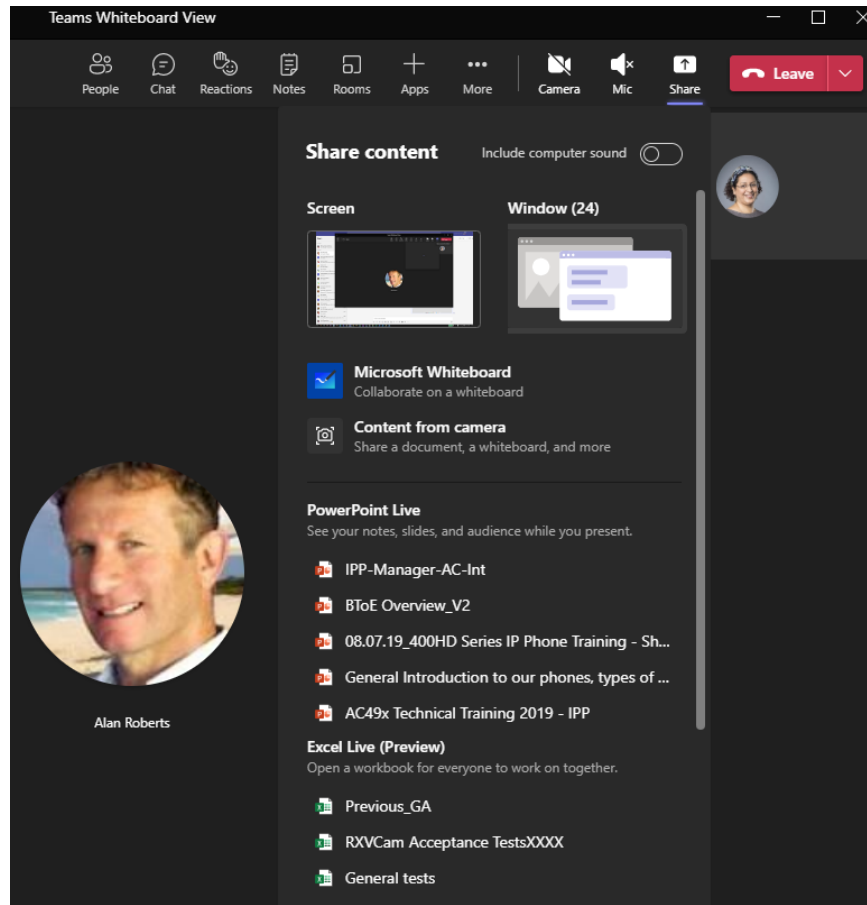





3. View the following Microsoft Whiteboard initializing indication:

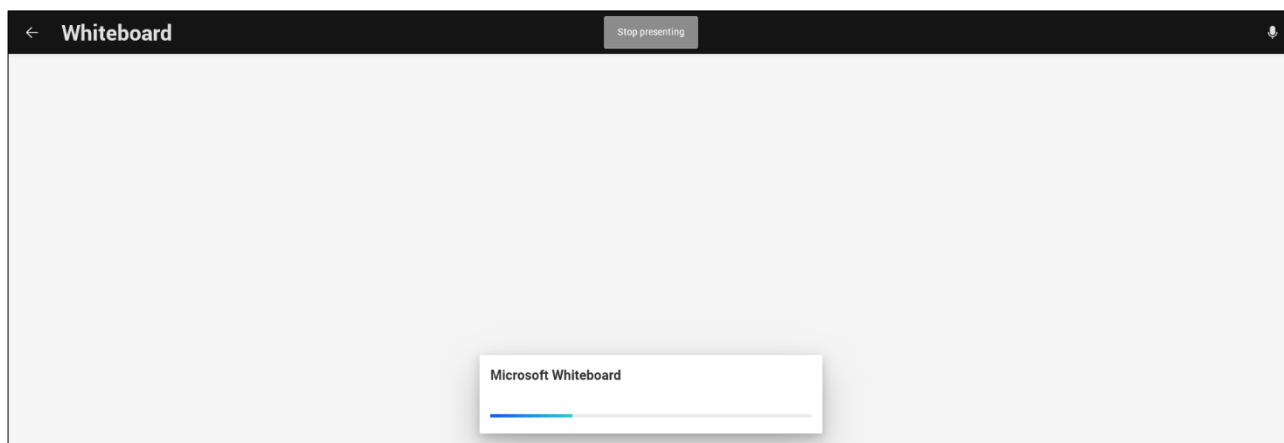

4. View the Whiteboard in the Teams desktop application or in Teams client:

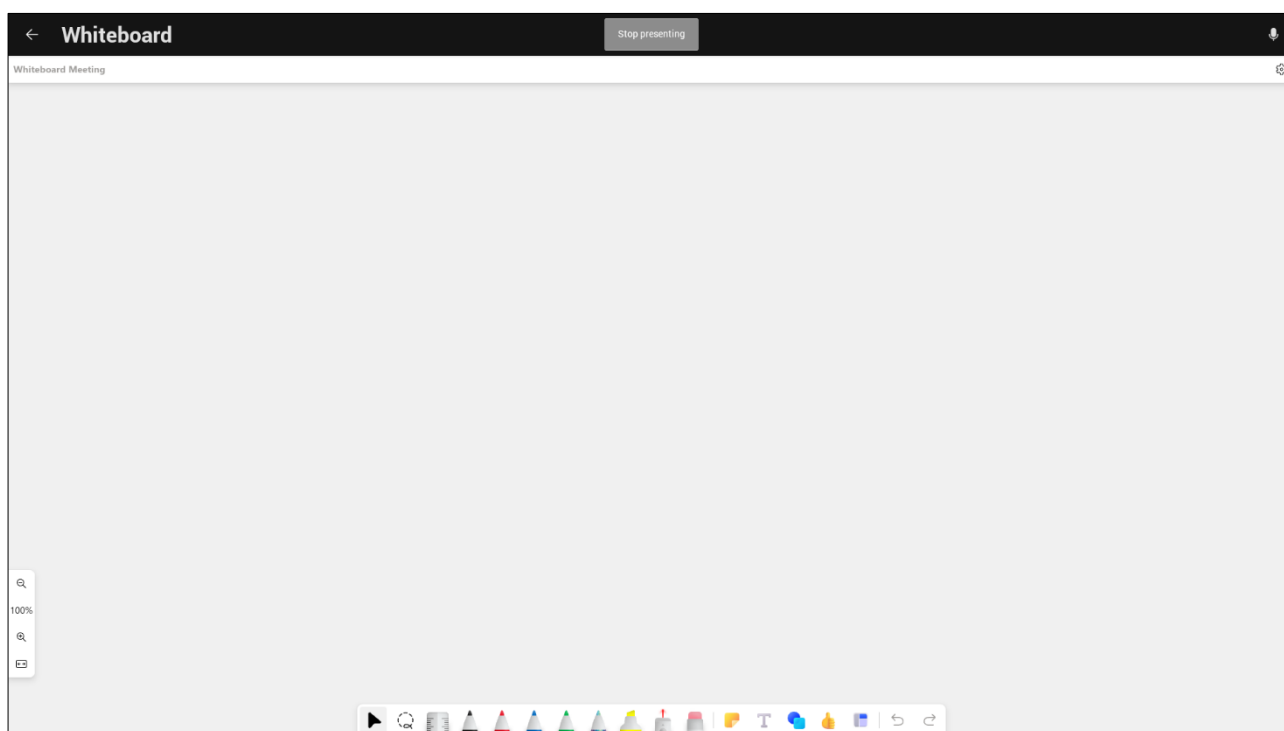

5. Edit the Whiteboard; every participant with privileges can edit it.

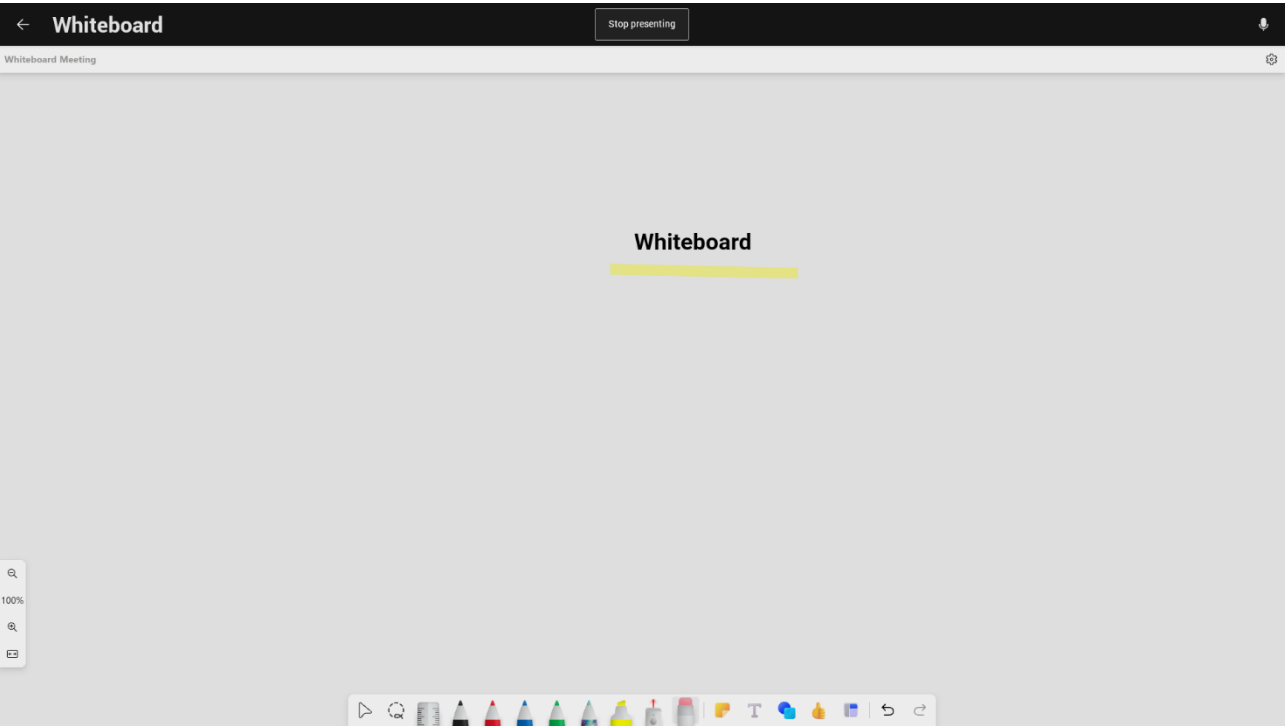

## 4.9 Screen Sharing

RXV200 enables users to share their PC/laptop screen via the RX-PAD HDMI In port, to be shared on the screen in IDLE mode and peripheral mode.

**Note:**

- A short HDMI cable connects the PC/laptop to the RX-PAD HDMI In port.
- The connection between RX-PAD and RXV200 is thus 'cableless'.

The feature offers added flexibility by enabling the use of a shorter HDMI cable connected to the center of the meeting room desk, in contrast to a longer (more expensive) cable connected to the RXV200 positioned in the front of the room.

- **Teams Meeting Mode:** When the MTR is in a meeting, the presenter can use the Teams app 'Share' key to share their PC screen (when their PC is connected to RX-PAD's HDMI In port) with in-person attendees who are physically present in the same meeting room, as well as with remote attendees. [Audio sharing is currently unsupported].
- **Standby Mode:** When the MTR is not in a meeting, the presenter can use the Teams app 'Share' key to share their PC screen (when their PC is connected to RX-PAD's HDMI In port) only with in-person attendees who are physically present in the same meeting room.



To enable utilization of this feature, make sure the following is permitted in the organization's firewall settings:

- Hostname: `jitsi-meet-ipp.eastus.cloudapp.azure.com`
- IP Address: `20.115.49.175`
- Allow incoming connections on the following ports:
  - 80/tcp
  - 443/tcp
  - 3478/udp
  - 5349/tcp
  - 10000/udp

## 4.10 Updating RXV200 Audio and Camera Peripherals Firmware




**Note:**

- RXV200 firmware update includes **RXVCam360** camera and speaker firmware upgrade.
- RXV200 firmware update includes **RXVCam70** camera firmware upgrade.
- RXV200 firmware update includes **RXVCam50** camera firmware upgrade.
- RXV200 firmware update includes **RX15** speaker firmware upgrade.

Updating RXV200 audio and camera peripherals firmware is a safe and streamlined process. Peripherals' update packages are included in the RXV200 firmware update and executed according to the currently connected peripheral. Here's the user experience:


1. View 'Device is updating...'

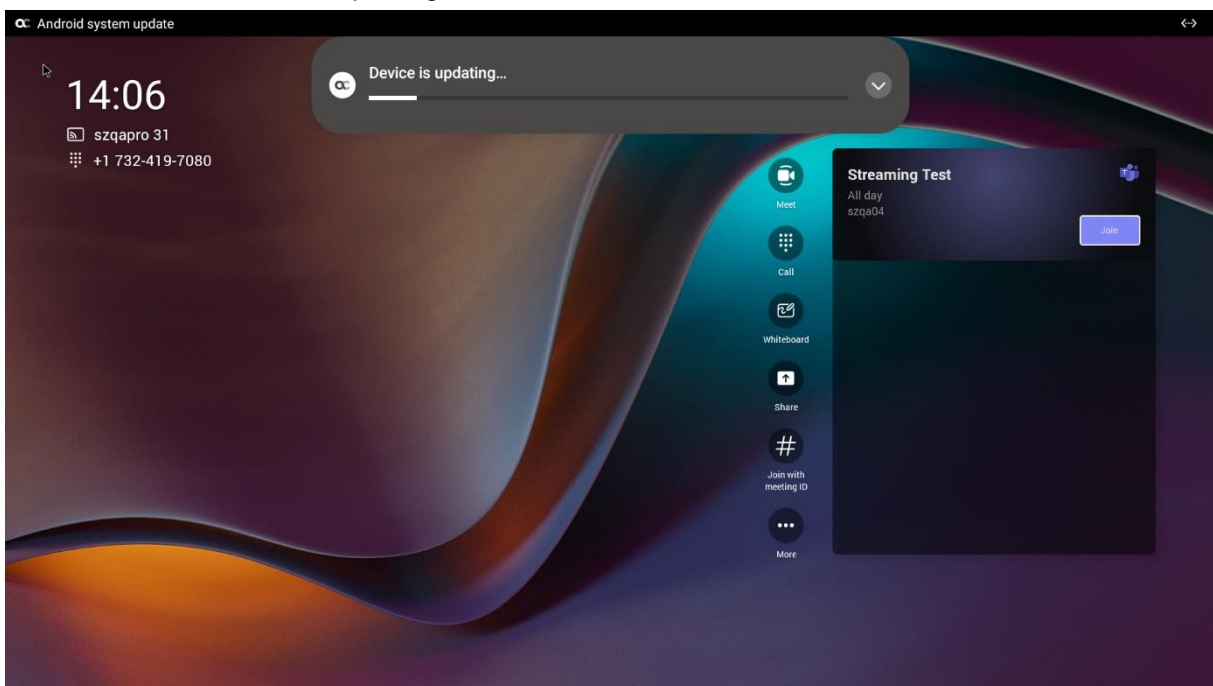

2. View the notification 'AudioCodes RXV200 RXVCam70 / RXVCam360 / RXVCam50 firmware is being updated, do not reboot the device'.
3. Click **OK**.
4. If RX15 is connected, you'll view the notification: 'AudioCodes RX15 firmware is being updated, do not reboot the device'
5. Click **OK**.
6. After a peripheral firmware upgrade is completed, the connected device will perform a reboot and an associated notification will appear at the bottom of the screen.

## 4.11 About Microsoft Teams

Information about the Microsoft Teams application can be viewed by navigating to and selecting the Settings screen's **About** option shown in the preceding figure.

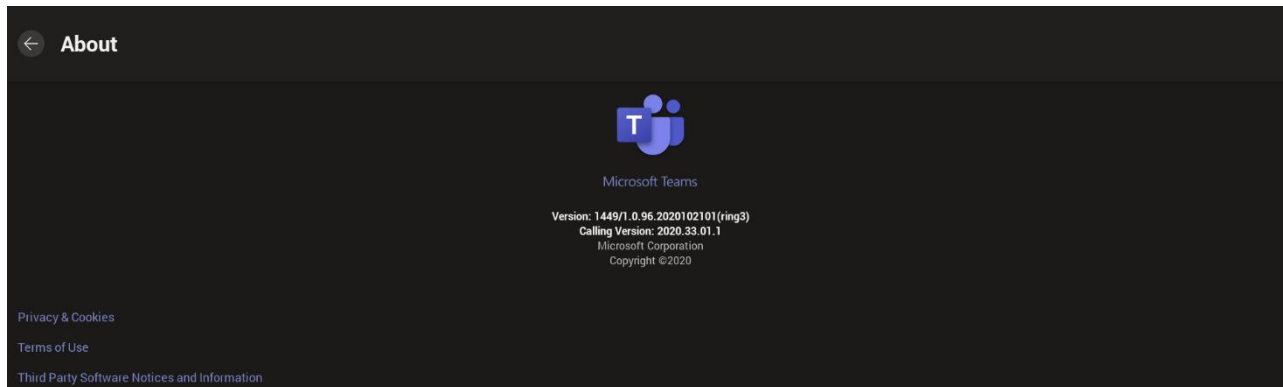


## 4.12 Signing out

You can sign out of the application as one user and optionally sign in again as another.

### ➤ To sign out:


- Navigate to and select **Sign out** in the Settings screen shown in the preceding figure.

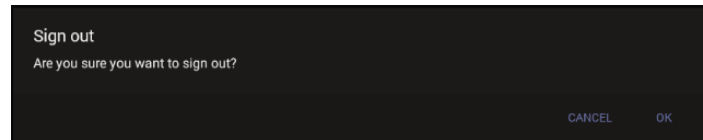

Optionally, remote sign-out can be performed from Microsoft Teams admin center (TAC). Network administrators can provision the RXV200 from the TAC, remotely sign in, and also sign out.

### ➤ To sign out of the RXV200 using Microsoft TAC:

- Navigate to the TAC screen shown in the figure below and from the ... menu located in the uppermost right corner of the screen, select **Actions** and then **Sign out**.

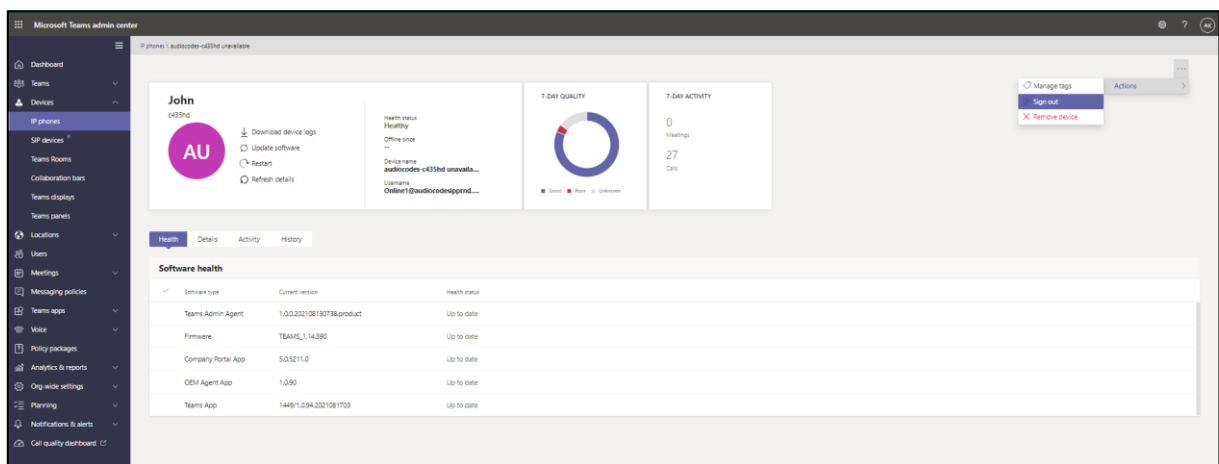

## 4.13 Enrolling a Device with Intune Policies

Two ways are available to enroll an AudioCodes Teams Android-based device in Intune:

- Create a dynamic group - see [here](#)
- Create an exclusion group - see [here](#)

### 4.13.1 Creating a Dynamic Group

See [here](#) how to create dynamic groups in Intune for enrolling AudioCodes Android-based Teams devices.

### 4.13.2 Creating an Exclusion Group

The information presented here shows how to *exclude* AudioCodes Android-based Teams devices from the organization's Intune policies.

### ➤ To exclude devices from the organization's Intune policies:

- Remove all conditions that were previous configured:
  - Access Microsoft Azure Government Portal Home > Conditional Access Policies > Require Hybrid Joined or Intune to Access Cloud Resources Conditional Access policy as shown in the figure below.

- Exclude the device from Intune policies and replace **displayName -contains RXVxx** where **RXVxx** is the name of the device model (**device.model**).

## 4.14 Removing Devices from Intune admin center

You can remove devices from Intune admin center when the maximum capacity of signed-in devices is reached.

➤ **To remove devices from Intune admin center:**

- Go to Microsoft 365 admin center [portal.office.com] and log in with an Administration account.
- Navigate to **Devices > Android devices**.



**Note:** The Intune admin center service is licensed according to the terms of individual licenses so not all network admins will be able to navigate to it. Check if the license you're using includes the service or not.

- Click **Bulk device actions**.

Home > Devices | Android > Android | Android devices >

## Bulk device action

1 Basics 2 Devices 3 Review + create

OS \* → Android (device administrator) ▼


Device action \* → Delete ▼

**i** If you delete this device, you will no longer be able to view or manage the device from the Intune portal. The device will no longer be allowed to access your company's corporate resources. Company data may be wiped from the device if the device tries to check-in after it is deleted.

Previous Next

4. From the 'OS' drop-down under the **Basics** tab, select **Android (device administrator)**. From the 'Device action' drop-down, select **Delete**. Click **Next**.



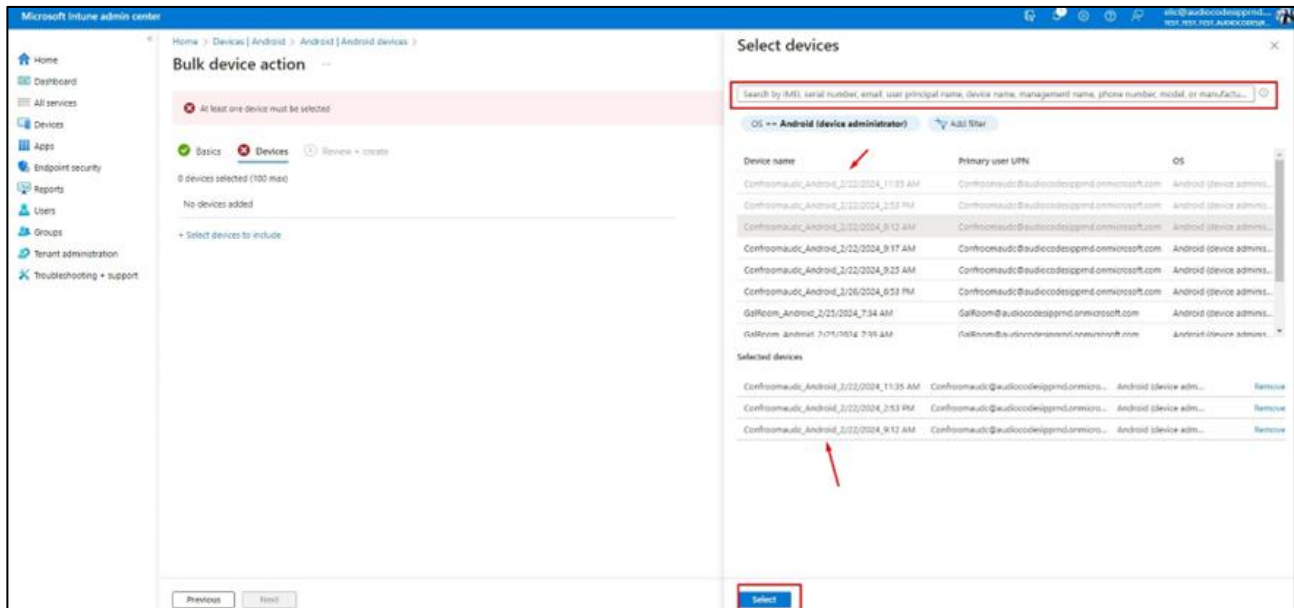

5. Select the devices to delete (i.e., to remove from Intune admin center), and then click **Select**.

Microsoft Intune admin center

Home > Devices | Android > Android | Android devices >

### Bulk device action

Basics **Devices** Review + create


3 devices selected (100 max)

Device name	Primary user UPN	OS	Action
Confroomaudc_Android_2/22/2024...	Confroomaudc@audiocodesippnd.onmicrosoft...	Android (device admini...	Remove
Confroomaudc_Android_2/22/2024...	Confroomaudc@audiocodesippnd.onmicrosoft...	Android (device admini...	Remove
Confroomaudc_Android_2/22/2024...	Confroomaudc@audiocodesippnd.onmicrosoft...	Android (device admini...	Remove

+ Select devices to include

Previous Next

6. Under the **Devices** tab, click **Next**.

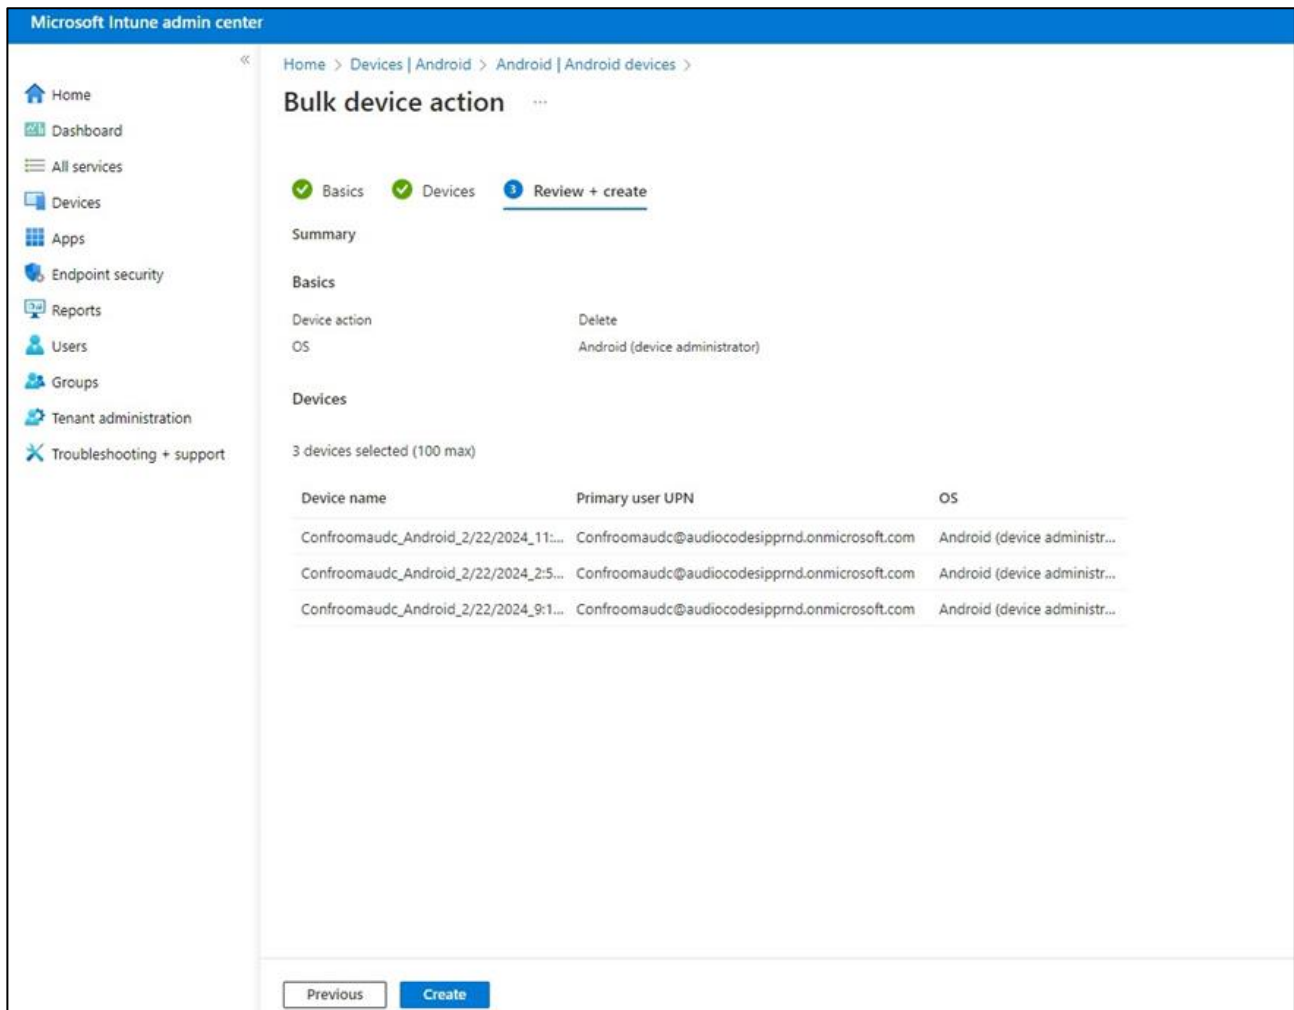

Microsoft Intune admin center

Home > Devices | Android > Android | Android devices >

### Bulk device action

Basics Devices **Review + create**

Summary

Basics

Device action Delete

OS Android (device administrator)

Devices

3 devices selected (100 max)

Device name	Primary user UPN	OS
Confroomaudc_Android_2/22/2024_11:...	Confroomaudc@audiocodesipprnd.onmicrosoft.com	Android (device administr...
Confroomaudc_Android_2/22/2024_2:5...	Confroomaudc@audiocodesipprnd.onmicrosoft.com	Android (device administr...
Confroomaudc_Android_2/22/2024_9:1...	Confroomaudc@audiocodesipprnd.onmicrosoft.com	Android (device administr...

Previous Create

7. Under the **Review + Create** tab, make sure your definitions are correct and then click **Create**; admin receives a notification that a delete action from Intune was successfully initiated on all devices and that  $n$  devices were removed.



**Note:** It may take some time to completely sync the devices with the account so after deleting the devices, wait for 30 minutes before signing in.


This page is intentionally left blank.

## 5 Getting Familiar with RXV200 Settings


The section familiarizes you with the RXV200's settings. RXV200s are delivered configured with their default settings. Customers can customize them to suit enterprise requirements.

➤ **To access device settings:**


1. In the home screen, navigate to and select the **More** option.

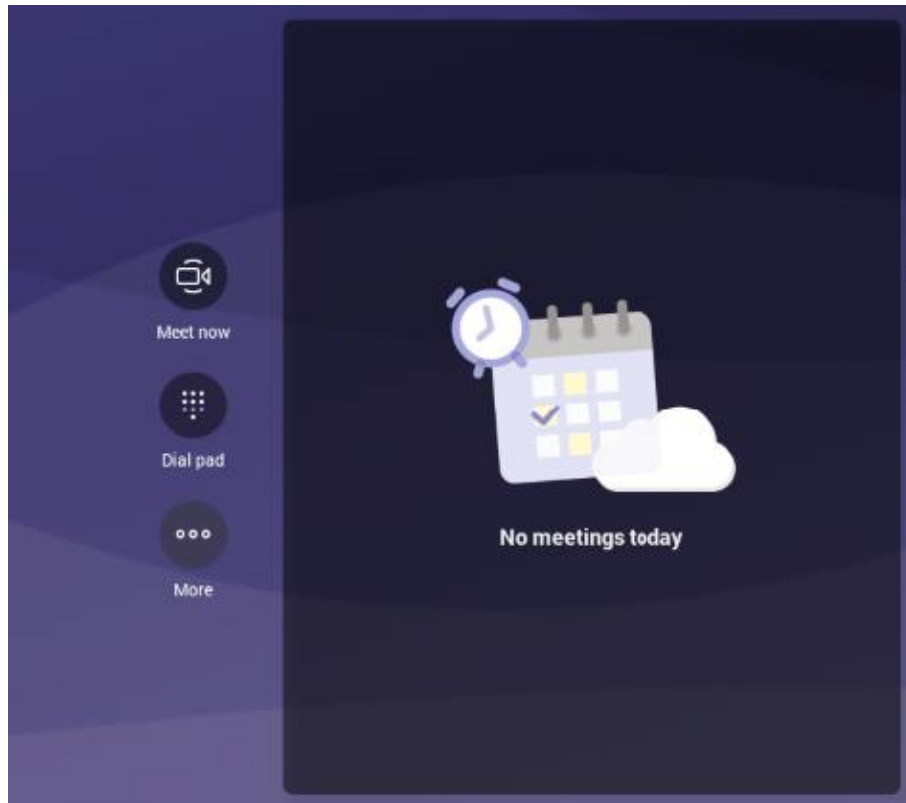


2. Navigate to and select **Settings**.

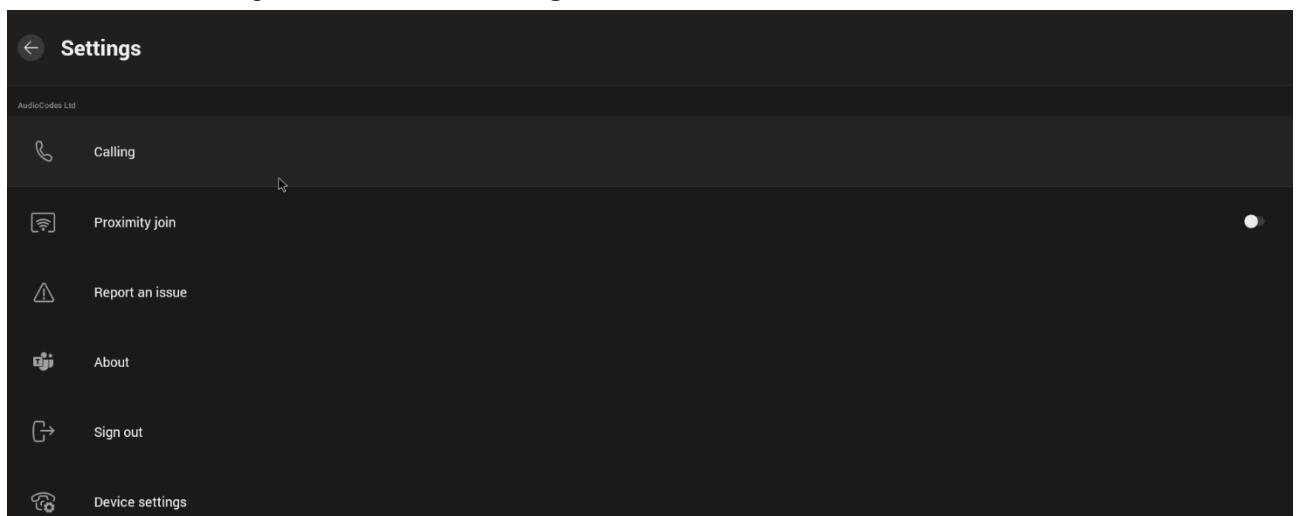

3. Navigate to and select **Device settings**.

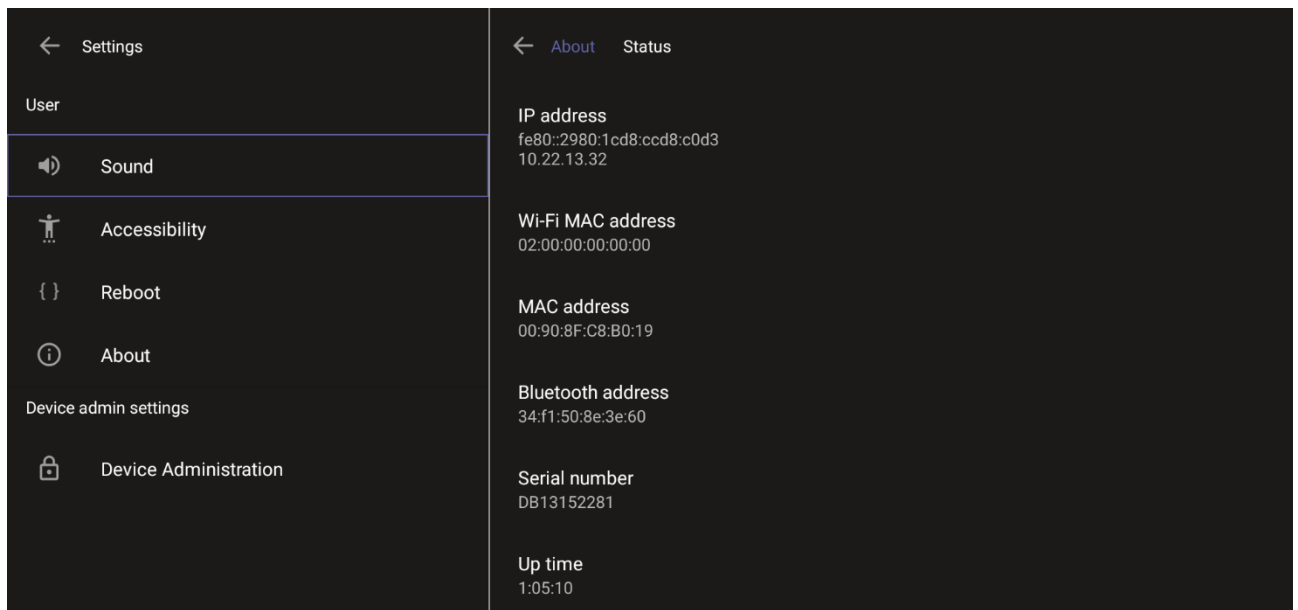

4. Navigate to and select **Device Administration**.

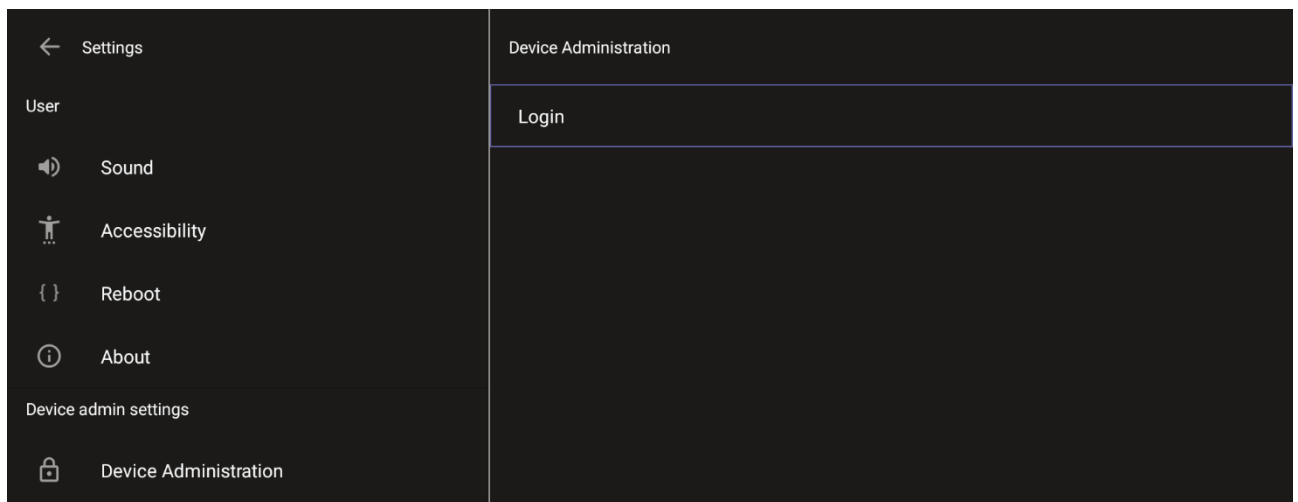


5. Log in as administrator.



**Note:** Logging in as Administrator is required for debugging options. It's password protected. Default: **1234**. After logging in as Admin, you can log out | change password.

6. Select **Login**.

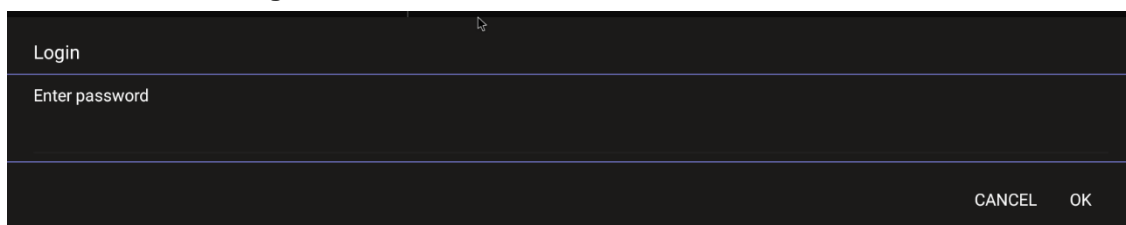

7. Enter the password (**1234**) in the 'Enter password' field; use the virtual keyboard to enter the password.



**Note:** The virtual keyboard pops up for all 'Settings' fields to allow inputting characters and / or numbers. Two virtual keyboard types can be displayed: Numeric or QWERTY.

8. Select **OK**; you're prompted to change password.



**Note:**

- The default password must be changed before access to the device via SSH is allowed.
- The default password can be changed per device from the GUI, or via bulk configuration of multiple devices using Microsoft's TAC or AudioCodes' Device Manager.


9. Enter a password; you're prompted to verify the password you entered. Criteria required for a strong password are provided (for strengthened security) in order to Log in as Administrator:
  - The password length must be greater than or equal to 8.
  - The password must contain one or more uppercase characters.
  - The password must contain one or more lowercase characters.
  - The password must contain one or more numeric values.
  - The password must contain one or more special characters.



**Note:** These virtual keyboards are also displayed when the admin needs to enter an IP address to debug, or when they need to enter their PIN lock for the security setting.

After logging in, the Settings screen now also displays the settings under the section 'Device admin settings'.

10. Click **OK**; the Settings screen now also displays 'Device admin settings', in addition to the 'User' settings.

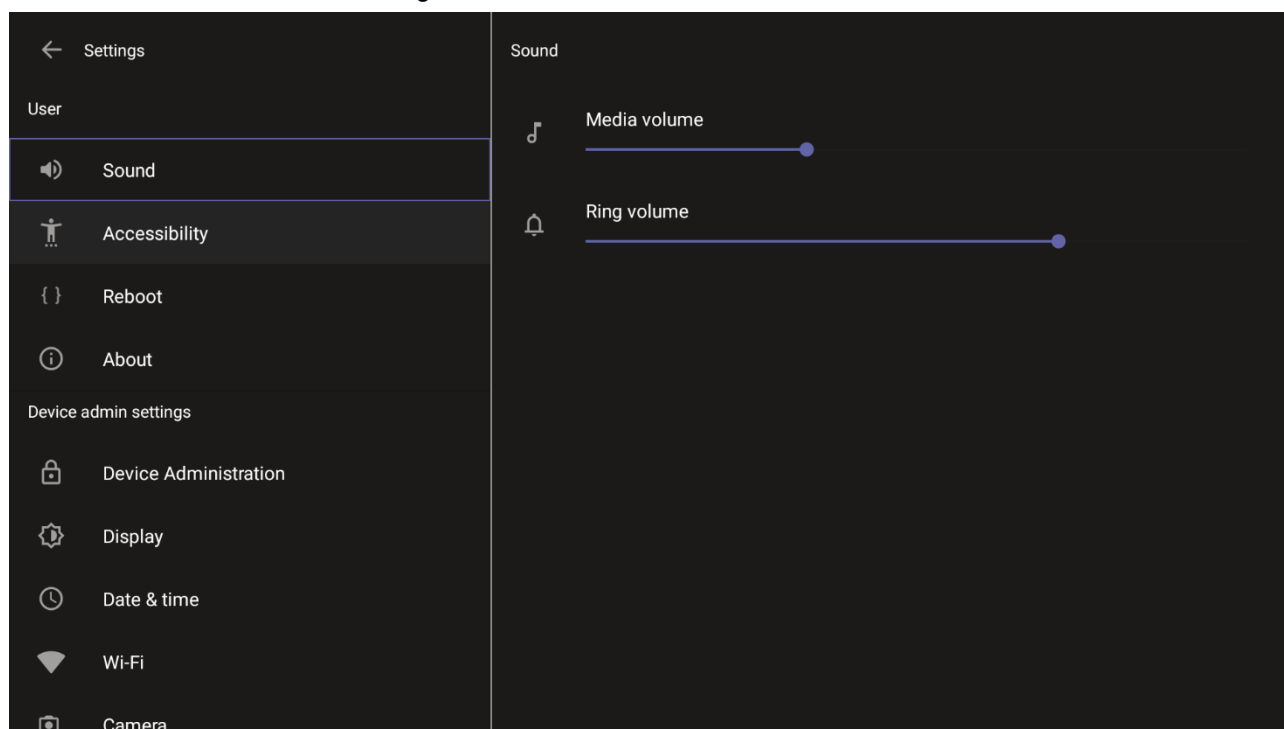

## 5.1 Device Admin Settings

After logging in as Device Administration as shown in the previous section, you can configure Device Administration settings: Display, Date & Time, Wi-Fi, Camera.

### 5.1.1 Configuring Admin Login Timeout

Admin login timeout can be configured using the following cfg configuration file parameter: settings/admin\_logout\_timeout,values=3

- Default: 3 (minutes)
- Valid values: 1-10 (minutes)



**Note:**


- Timing begins when exiting the 'Device Settings' menu.
- When the timeout expires, the device logs out automatically.
- The functionality works for both registered and unregistered devices.

### 5.1.2 Configuring Display

Modify these settings to suit your preferences related to the look and feel of the user interface.


➤ **To configure Display settings:**

1. Under 'Device admin settings', navigate to and select **Display**.

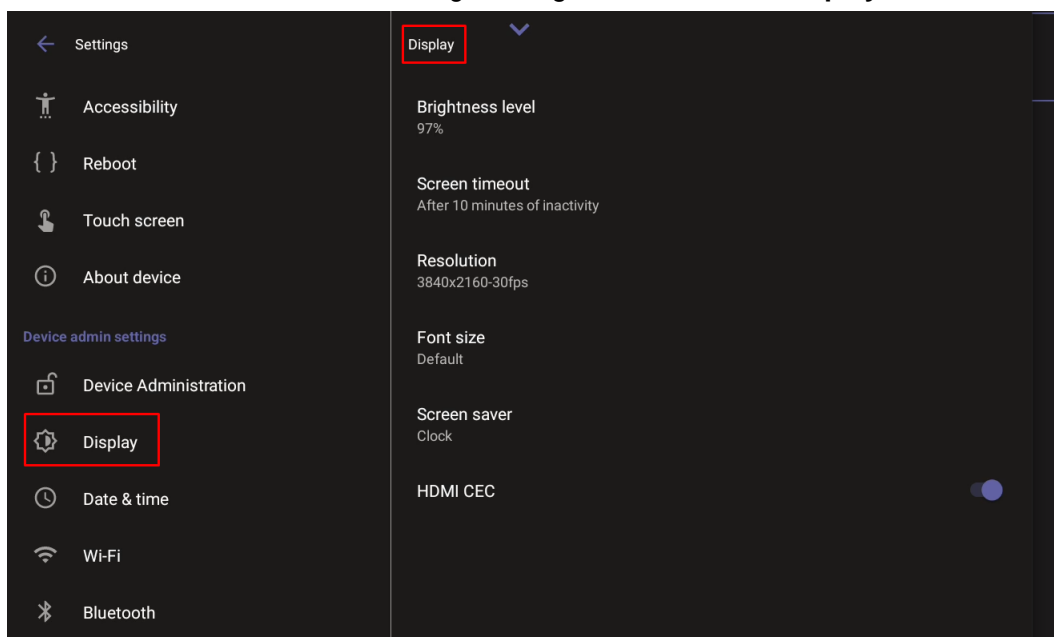

2. Under 'Display', navigate to and select **Sleep**.



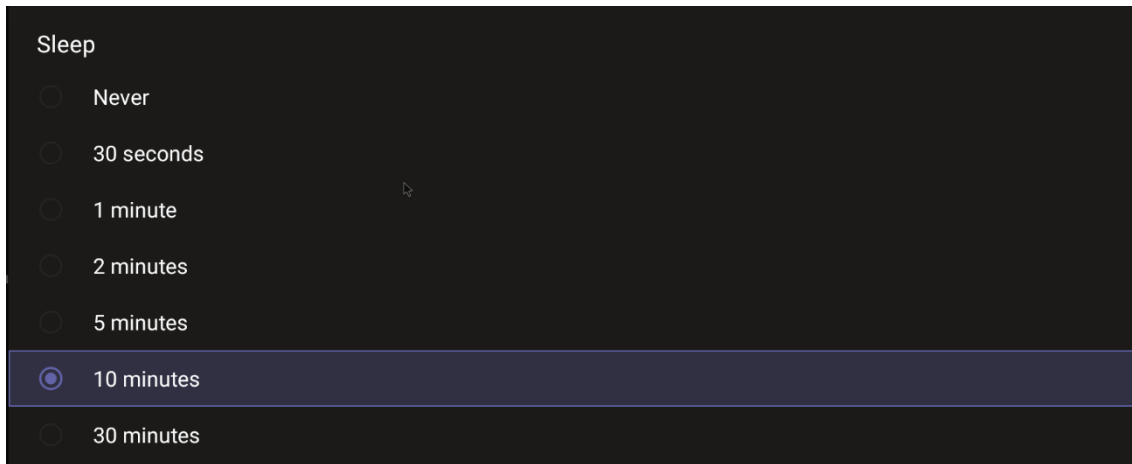


3. Navigate to and select the time to lapse before the interface 'goes to sleep'.  
Default: 10 minutes.




**Note:** It's recommended not to enable the 'No IR Power off' option which exists in known TV brands such as LG and Samsung, and to allow RX-PAD to put the system to sleep while it is not in use.

4. Navigate to and select **Font size**.

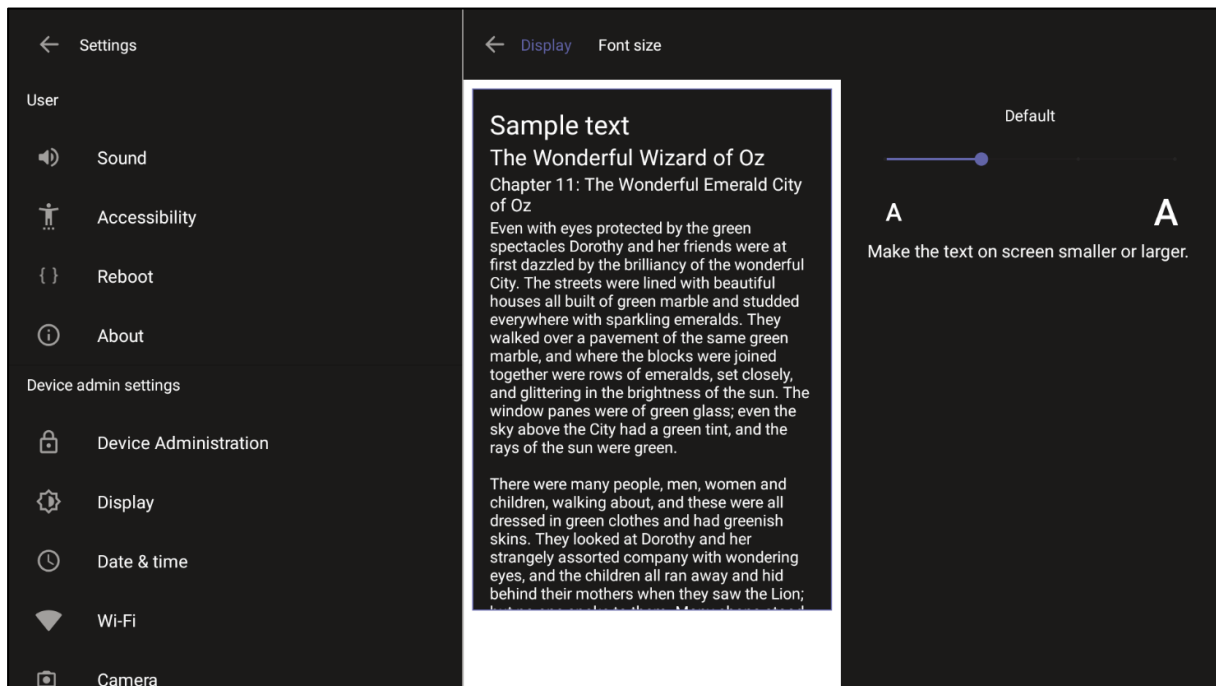

5. Navigate to and select **Screen saver**.

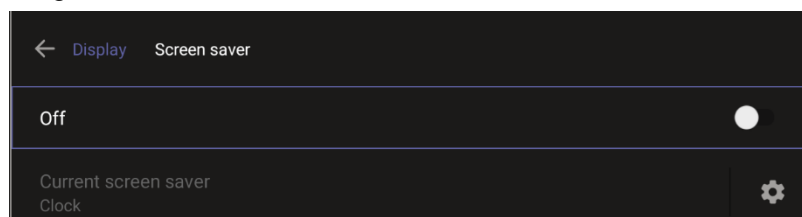


6. Navigate to and select **Off** to switch it on and then choose the screen saver.

### 5.1.3 Configuring Date & Time

Date and time are automatically retrieved from the deployed Network Time Protocol (NTP) server.

➤ **To configure Date & Time:**

1. Under 'Device admin settings', navigate to and select **Date & Time**.

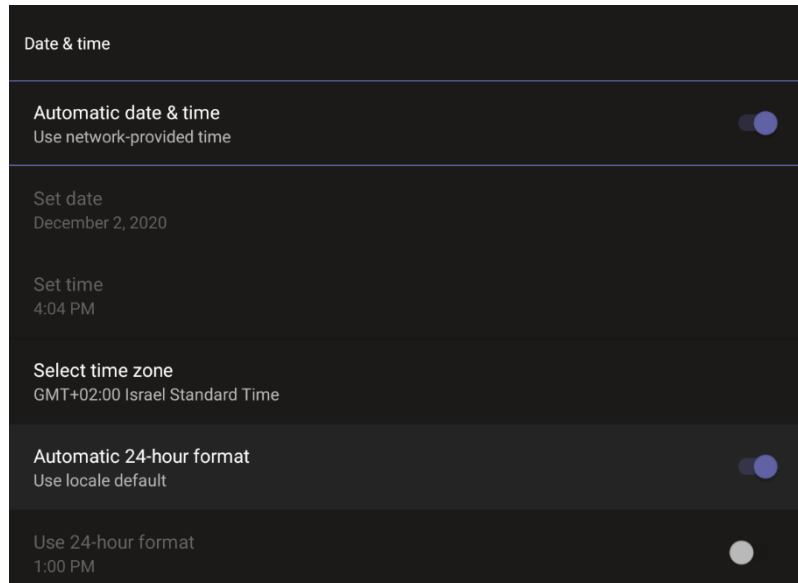

The screenshot shows a 'Date & time' configuration screen with the following options:

- Automatic date & time**: Use network-provided time (toggle is on)
- Set date**: December 2, 2020
- Set time**: 4:04 PM
- Select time zone**: GMT+02:00 Israel Standard Time
- Automatic 24-hour format**: Use locale default (toggle is on)
- Use 24-hour format**: 1:00 PM (toggle is off)

2. Navigate to and select **Use 24-hour format** [Allows you to select the Time format].



**Note:** The device automatically detects time zone via geographical location (**Automatic Time Zone Detection**).

## 5.1.4 Configuring Wi-Fi

The RXV200 can connect to an Access Point via Wi-Fi.

Network administrators can configure Wi-Fi parameters for the RXV200. The parameters are concealed from the user's view. Users can enable | disable Wi-Fi in the device's user interface.



**Note:** Wi-Fi cannot be enabled | disabled using SSH command.

The Wi-Fi connection is transparent to users; which frequency is used, 2.4 GHz or 5 GHz, is made for users by the device; users cannot disable one or the other.


### 5.1.4.1 Connecting to an Available Wi-Fi Network

➤ To connect to an available Wi-Fi network:



**Note:** Make sure to first disconnect your Ethernet cable. If it's connected, the device will not be able to connect to a Wi-Fi network.

1. Under 'Settings', navigate to **Wi-Fi** and enable **Use Wi-Fi**.

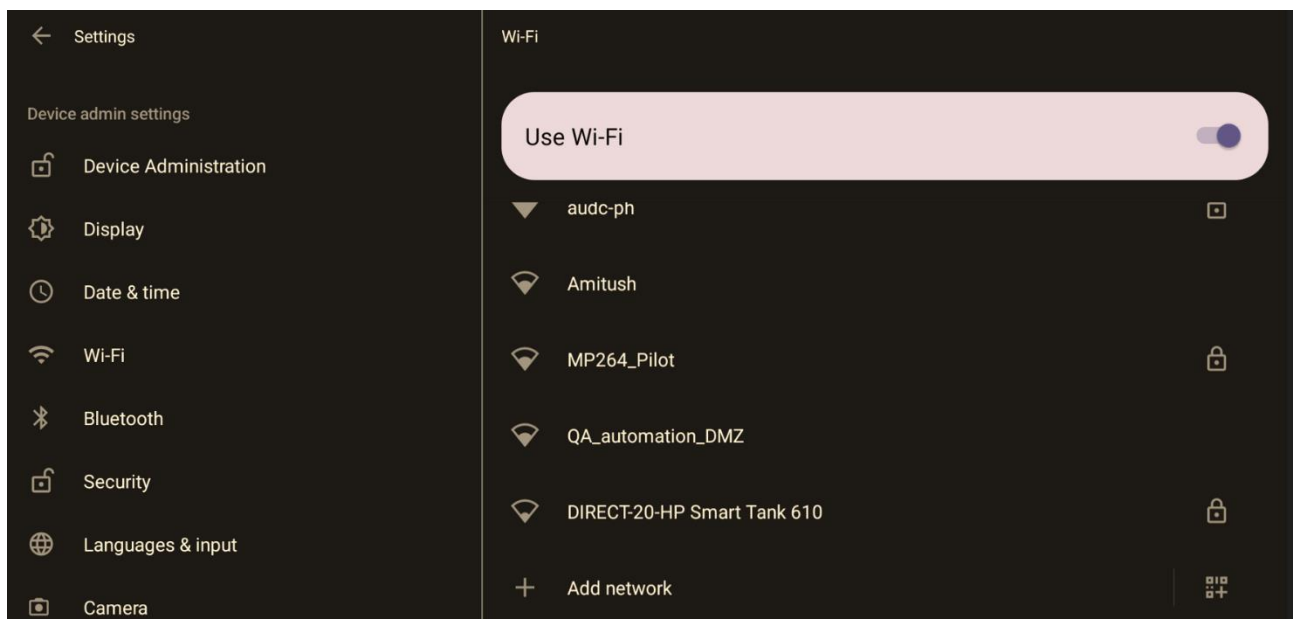

2. View a list of available connections.
3. Select the Wi-Fi network you want and enter the password.
4. View the network you selected 'Connected'.

### 5.1.4.2 Manually Connecting to a Wi-Fi Network

➤ To manually connect to a Wi-Fi network:



**Note:** Make sure to first disconnect your Ethernet cable. If it's connected, the device will not be able to connect to a Wi-Fi network.

1. Under **Wi-Fi**, select **Add network** and then enter the SSID of the network to add manually.

2. From the 'Security' drop-down, select a security key strength (encryption method).

3. Optionally meter the selected network. Leave the setting at its default value of **Detect automatically** if you don't want to meter the network. Select a **Metered** option to meter it.

**Note:**

- 'Proxy' and 'DHCP' will automatically be configured by the network.
- Enabling the setting **Turn on Wi-Fi automatically** allows the device to automatically connect in the future to the highest signal-quality network remembered by the device.
- As an alternative to manually configuring Wi-Fi settings via the device's user interface, you can configure the Wi-Fi settings described in [Table 5-1](#), using the Configuration File.

**Table 5-1: Configuration File Wi-Fi Parameters**

Parameter	Description
network/wireless/adadvanced_ options/dns1	Defines the IP of the wireless DNS1.
network/wireless/adadvanced_ options/dns2	Defines the IP of the wireless DNS2.
network/wireless/adadvanced_ options/gateway	Defines the IP address of the wireless gateway
network/wireless/adadvanced_ options/hidden_network	Defines the name of the wireless hidden network.
network/wireless/adadvanced_ options/ip_addr	Defines the IP address of the static Wi-Fi network if you're operating with a static Wi-Fi network.
network/wireless/adadvanced_ options/ip_settings	Used to define DHCP.
network/wireless/adadvanced_ options/network_prefix_length	Defines the network prefix length to be used.
network/wireless/adadvanced_ options/proxy	Defines the proxy wireless server source.
network/wireless/adadvanced_ options/proxy/auto_config/pac_url	Defines the URL of the PAC file.


Parameter	Description
network/wireless/advanced_options/proxy/manual/exclusion_list	Defines the list of IP addresses that will be blocked.
network/wireless/advanced_options/proxy/manual/proxy_hostname	Defines the name of the proxy host.
network/wireless/advanced_options/proxy/manual/proxy_port	Defines the proxy port.
network/wireless/anon_identity	Defines the anonymous wireless users who won't be seen.
network/wireless/ca_cert	Defines which CA certificate to use.
network/wireless/client_cert	Defines which client certificate to use.
network/wireless/domain	Defines the domain name.
network/wireless/eap_method	Defines the EAP method.
network/wireless/identity	Defines the identity of the user.
network/wireless/password	Defines the password of the network.
network/wireless/phase2_method NONE,MSCHAPV2,GTC,PAP,MSCHAP	Defines the encryption method. Phase 2 applies only to the 802.1x EAP method.
network/wireless/security	Defines the security method (encryption protocol).

### 5.1.5 Configuring Camera Settings


Settings controlling the look and feel of the video UI can be set to suit individual preferences.

➤ **To configure Camera settings:**

1. In RX-PAD under 'Device admin settings', navigate to and select **Camera**.

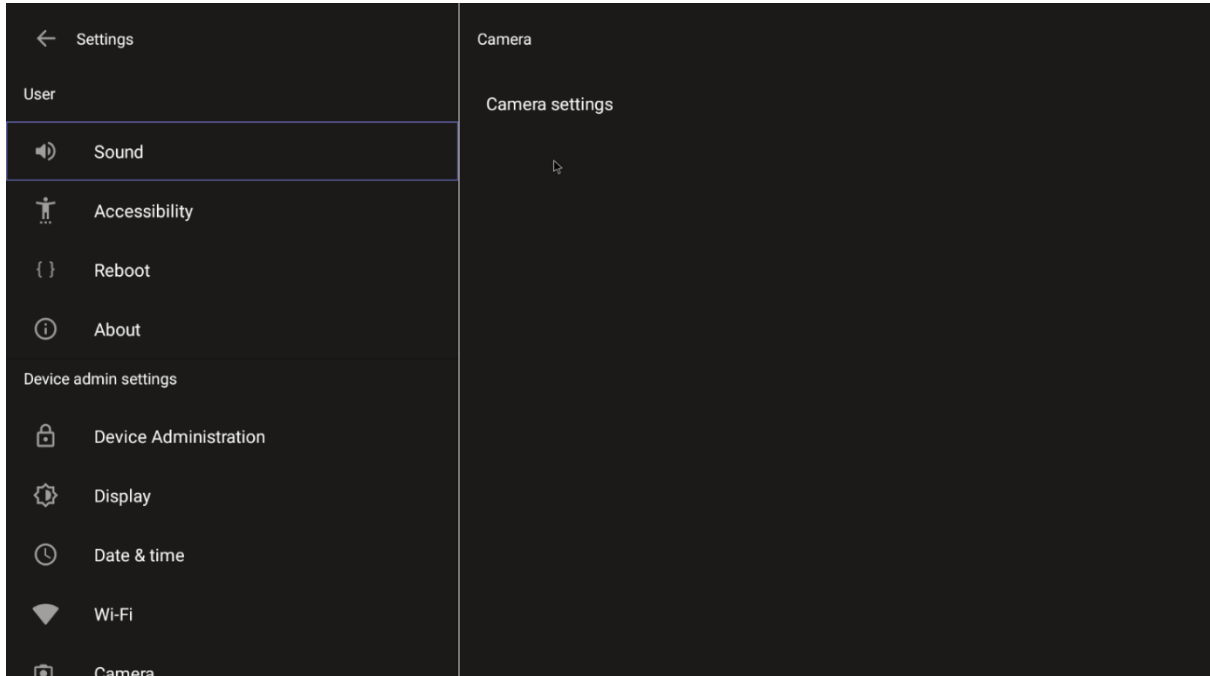

2. Navigate to and select **Camera settings**; the video stream is played and the following is displayed on the right side of the screen:

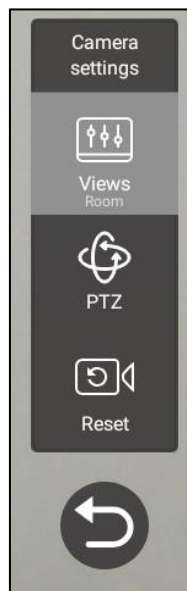

3. Create and edit presets using PTZ control. For more information, see [here](#).


## 5.1.6 Selecting RXVCam70 PTZ Camera Tracking Mode



**Note:** Applies exclusively to RX-PAD bundled with RXV200.

➤ **To select a Tracking Mode:**

1. Open the Edit Preset page (**Camera Settings > Room > Edit Preset**).

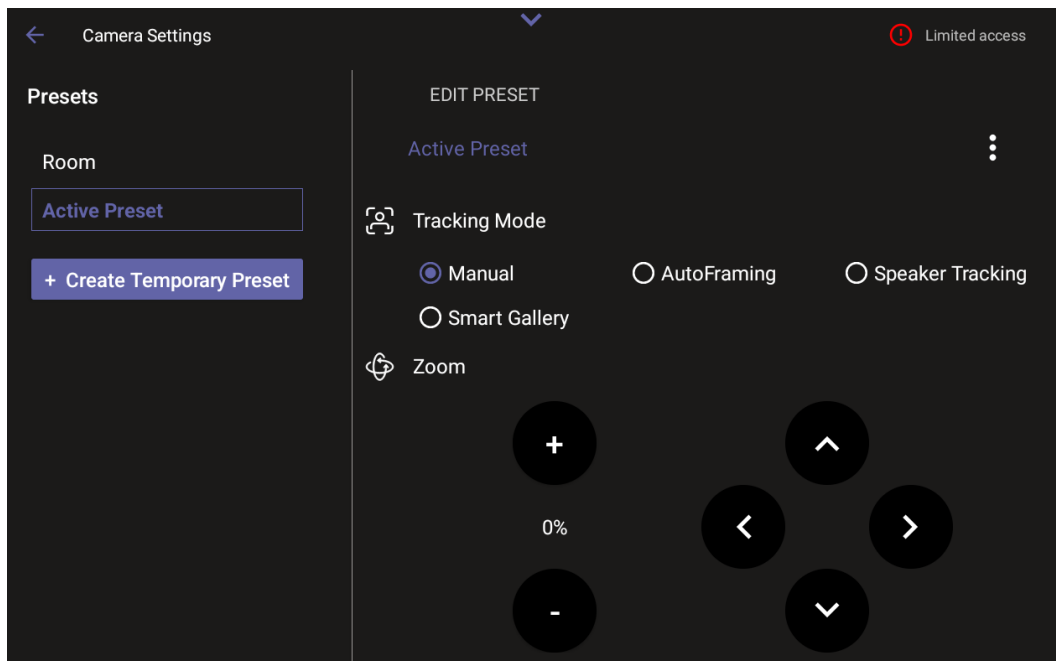




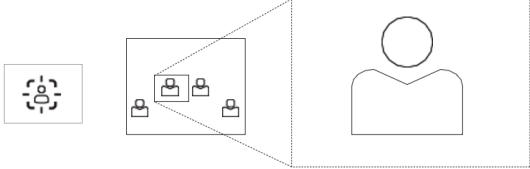


2. Select one of the following RXVCam70 camera tracking mode options:





- Manual
- Auto framing
- Speaker Tracking
- Smart Gallery

See the next step for a description of each tracking mode.



3. Use the following descriptions as a reference when configuring a tracking mode:

 <p><b>Smart Gallery</b></p>	<ul style="list-style-type: none"> <li>Automatically identifies 1-8 people</li> <li>Automatically lays out the display</li> <li>When a person moves, the camera automatically tracks them and keeps them centered</li> <li>Switching from one person to another is accompanied by dynamic effects of entry and exit</li> </ul>
	
 <p><b>Presenter Tracking</b></p>	<ul style="list-style-type: none"> <li>[Currently supported by the RC only]</li> <li>Automatically identifies and tracks the position of the presenter to ensure that that person remains centered.</li> <li>Press the left and right keys to select the target to track.</li> <li>Press <b>OK</b> to choose the target.</li> </ul>
	
 <p><b>Manual</b></p>	<ul style="list-style-type: none"> <li>Select this option to manually adjust the Zoom, Tilt or Pan.</li> <li>In RX-PAD's 'Camera Settings' page, use the sliders to set Zoom, Tilt or Pan.</li> <li>Using the RC, after selecting an area to display, zoom in   out, move up   down, and move left   right.</li> <li>This mode does not have AI functions.</li> </ul>
	

 <p><b>Speaker Tracking</b></p>	<ul style="list-style-type: none"> <li>▪ Automatically tracks speakers who speak continuously for 3-5 seconds</li> <li>▪ Focuses on the speaker (displays them close-up allowing participants to focus more)</li> <li>▪ Effective distance: 6m</li> </ul>
	
 <p><b>Group Framing</b></p>	<ul style="list-style-type: none"> <li>▪ [Supported by RX-PAD Camera Settings] [Same as 'Auto Framing']</li> <li>▪ Automatically detects and frames all the participants in the room.</li> <li>▪ Effective distance: 8m</li> </ul>
	


### 5.1.7 Selecting RXVCam360 Camera Tracking Mode



**Note:** Applies exclusively to RX-PAD bundled with RXV200.





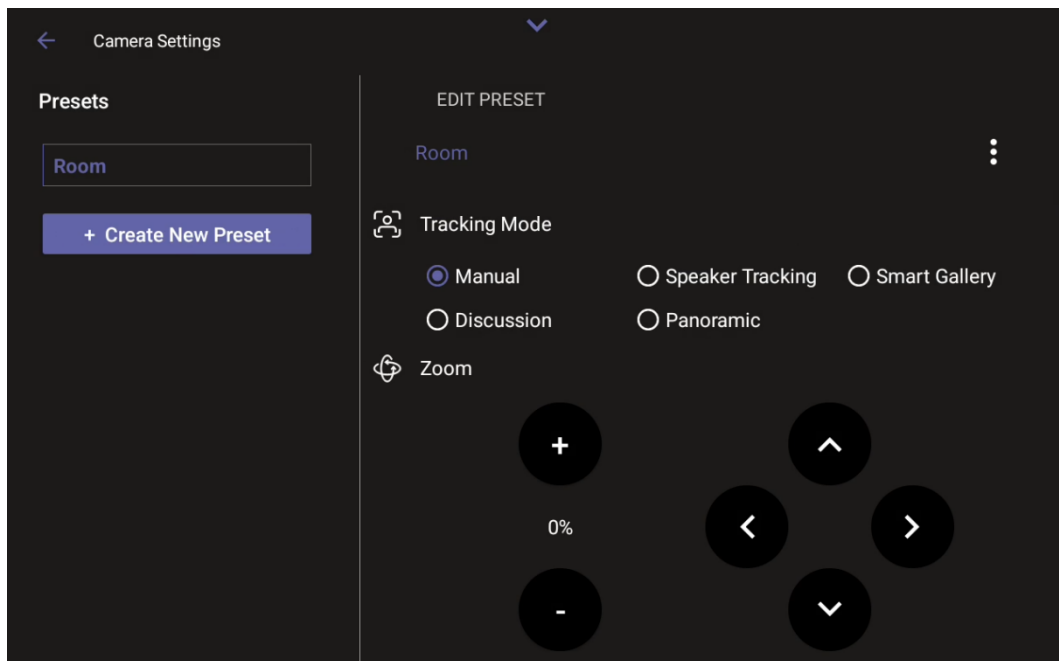


➤ **To select a Tracking Mode:**







1. Open the Edit Preset page (**Camera Settings > Presets > Room > Edit Preset**).





2. Select one of the following RXVCam360 camera tracking mode options:
  - Manual
  - Speaker tracking
  - Smart Gallery
  - Discussion
  - Panoramic

3. Use the following as reference:

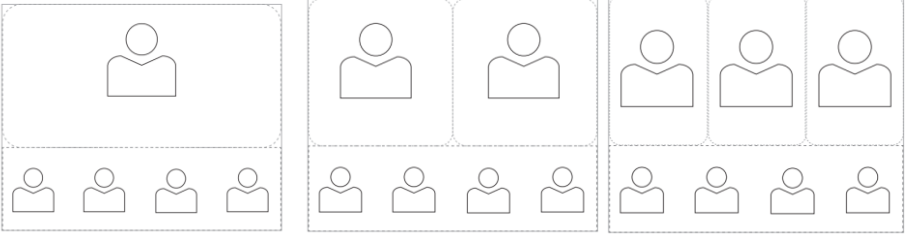 <p><b>Smart Gallery Mode</b></p>	<ul style="list-style-type: none"> <li>▪ <u>Recommended</u></li> <li>▪ Automatically identifies 1-8 people</li> <li>▪ Puts each in a dedicated frame</li> <li>▪ Maximum: 8 frames</li> <li>▪ When a person moves, the camera automatically tracks and keeps their head centered</li> </ul>
	   
 <p><b>Panoramic Mode</b></p>	<ul style="list-style-type: none"> <li>▪ 360° panoramic high-definition view</li> <li>▪ This mode does not have AI functions</li> </ul>
	

 <b>Speaker Tracking Mode</b>	<p>RXVCam360 follows the active speaker and automatically switches from the previous speaker to the next speaker within three seconds.</p>
	
 <b>Discussion Mode</b>	<ul style="list-style-type: none"><li>▪ The lowermost panel displays a 360° panoramic view.</li><li>▪ The second level displays an automatic layout of 1-3 speakers.<ul style="list-style-type: none"><li>• Only the person speaking is displayed.</li><li>• Those not speaking are not displayed.</li></ul></li></ul>
	

 <p><b>Manual Mode*</b></p>	<ul style="list-style-type: none"> <li>▪ Select an area to focus on</li> <li>▪ Use the RC to zoom in and out (five levels) and move up, down, left and right to select a focused area.</li> <li>▪ The selected area has a fixed 16:9 aspect ratio.</li> <li>▪ This mode does not have AI functions.</li> </ul>
	



\* Currently available only when using the RC

### 5.1.8 Limiting Resolution

Admin can limit HDMI resolution and Frames per Second (FPS) for debugging purposes.

➤ **To limit HDMI resolution and FPS:**

■ Open the Display page as shown in the figure below and perform the configuration:

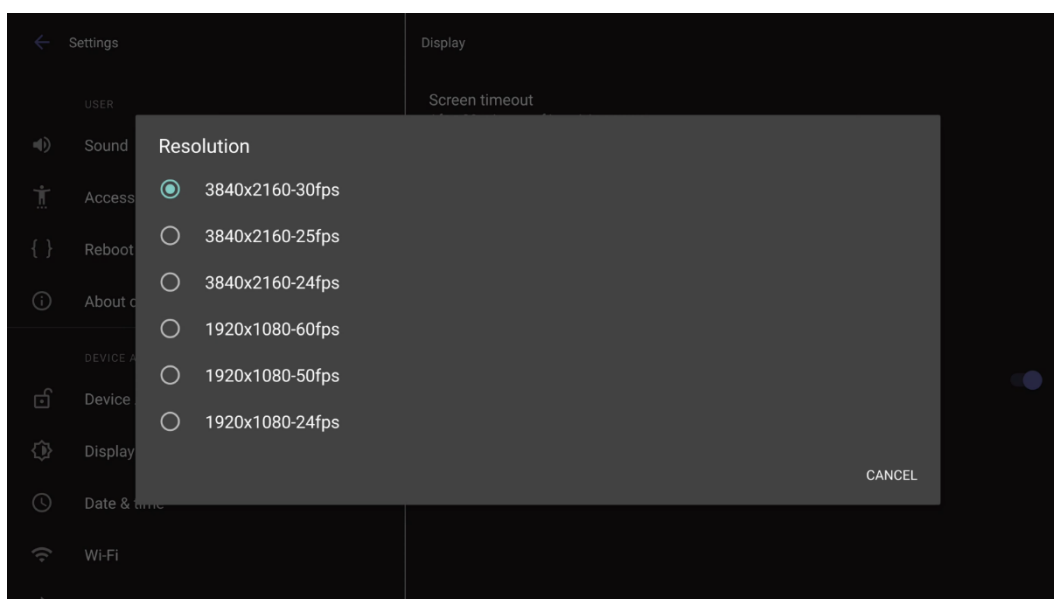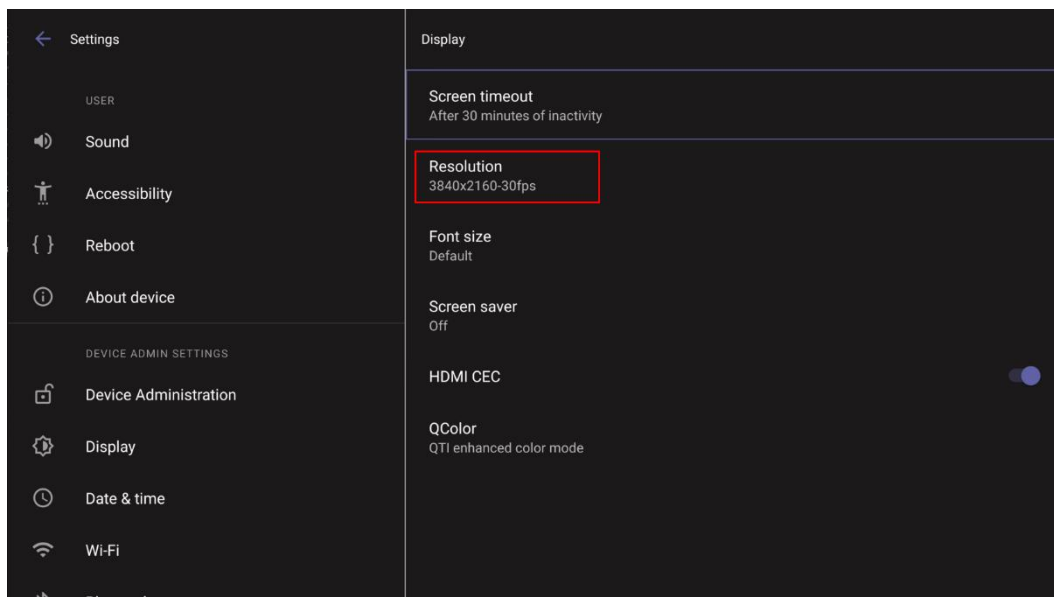


## 5.1.9 Configuring Teams Admin Settings

Camera Settings adjustment is now supported via **Device Settings > Teams Admin Settings**.

AudioCodes Camera Settings are synced with Teams Room Camera Settings.

The figure below shows how to control camera settings via the Teams Admin Settings.

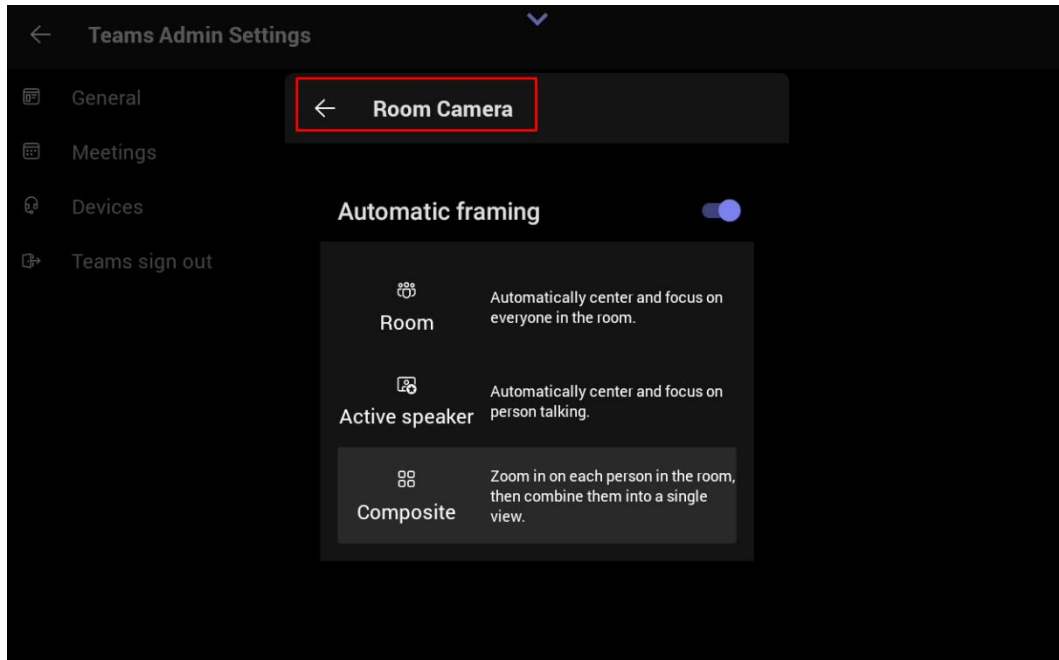




### 5.1.10 Configuring Camera Frequency

The **Camera frequency** (under **Device settings**) must be set per the power supply as follows:

- 110V – 60Hz
- 220V – 50Hz

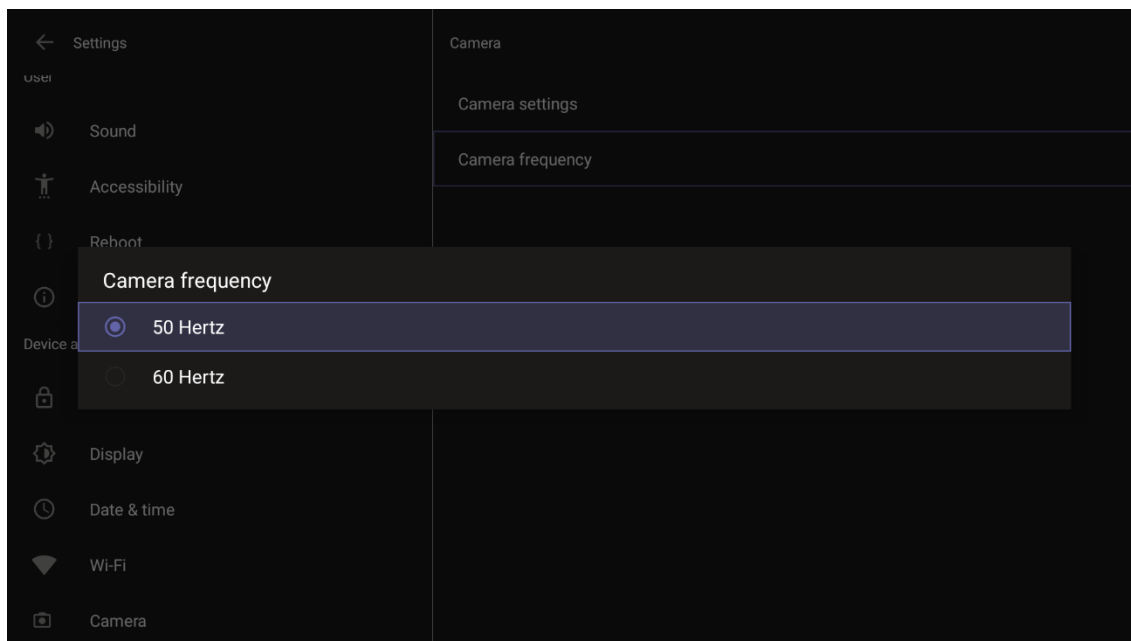


## 5.1.11 Configuring UI Language & Input


This setting allows users to customize inputting to suit personal requirements.

➤ **To set language and input:**

1. Under 'Device admin settings', navigate to and select **Languages & input**.

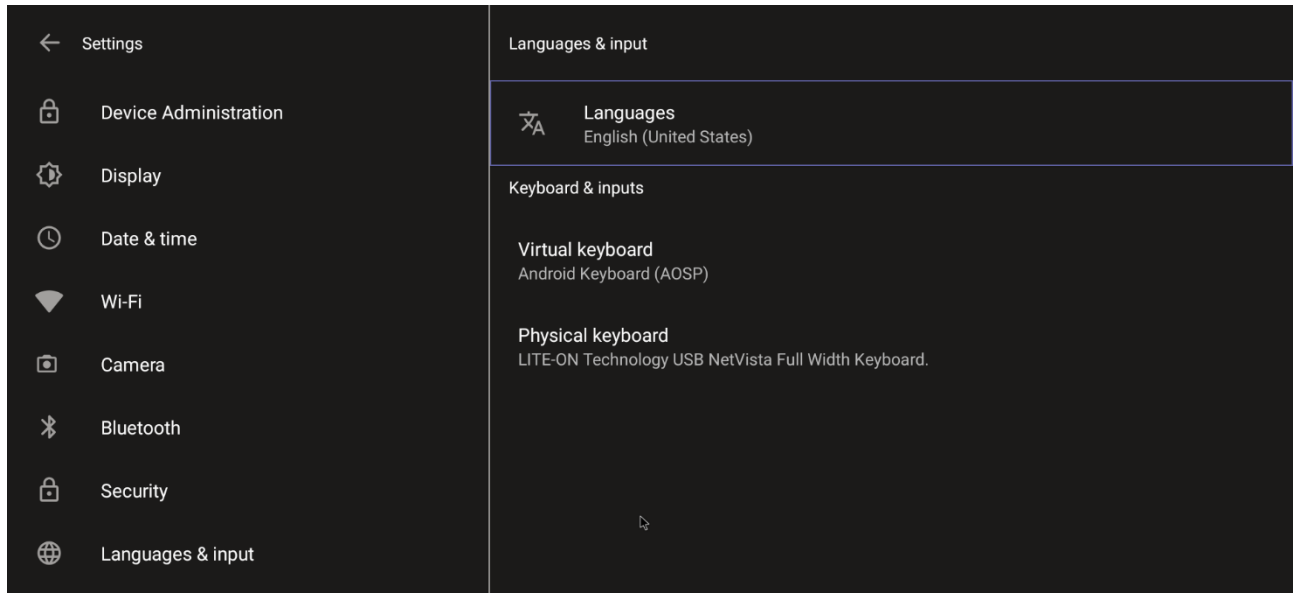

2. Navigate to and select **Physical keyboard**.

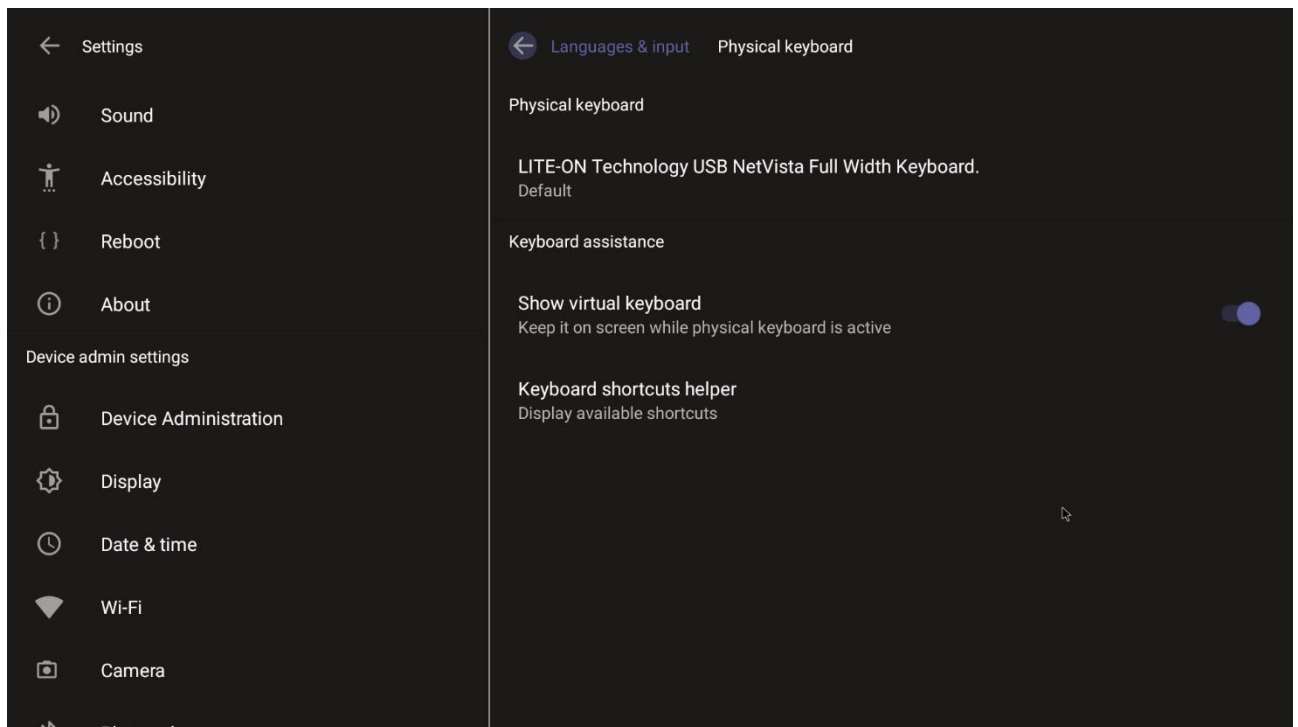


3. Navigate to and select **Show virtual keyboard**.

## 5.1.12 Modifying IP Network Settings

This setting enables the Admin user to determine IP network information and to modify IP network settings.


➤ **To modify network settings:**

1. Under 'Device admin settings', navigate to and select **Modify network**.

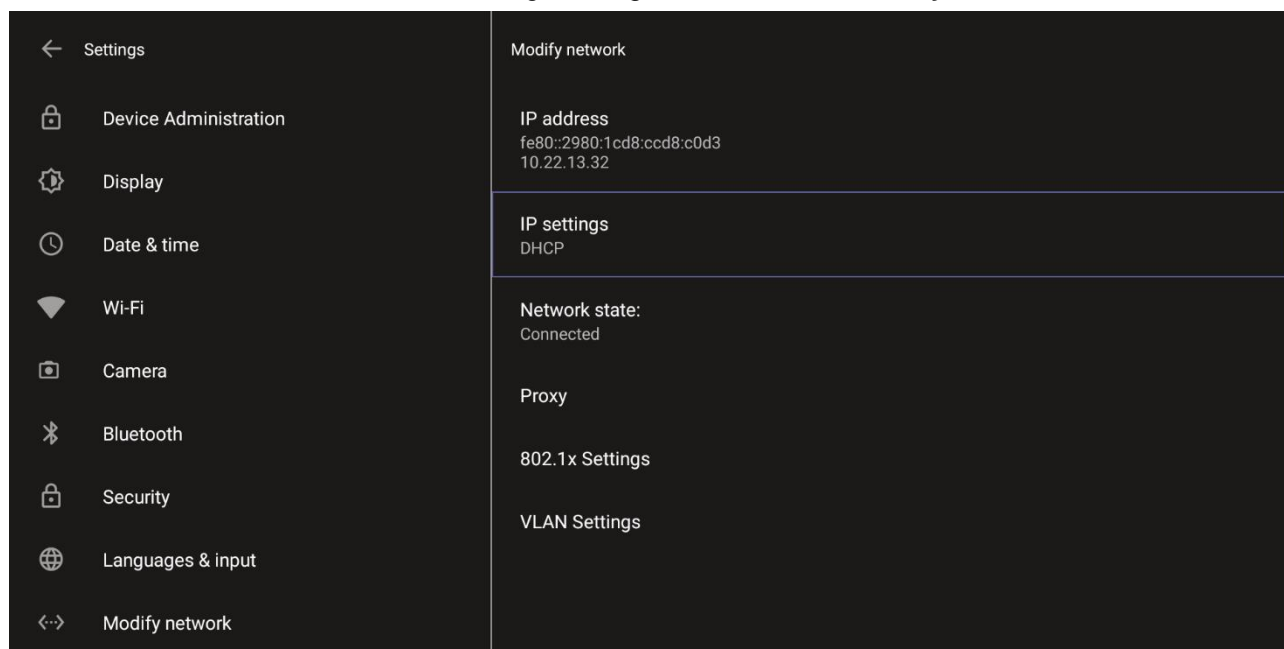


2. Navigate to and select:


- IP Address [Read Only]
- IP Settings [DHCP or Static IP]

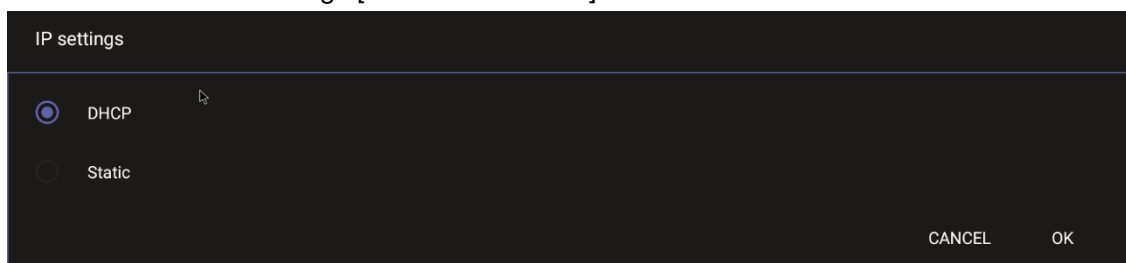

- Network state [Read Only]
- Proxy

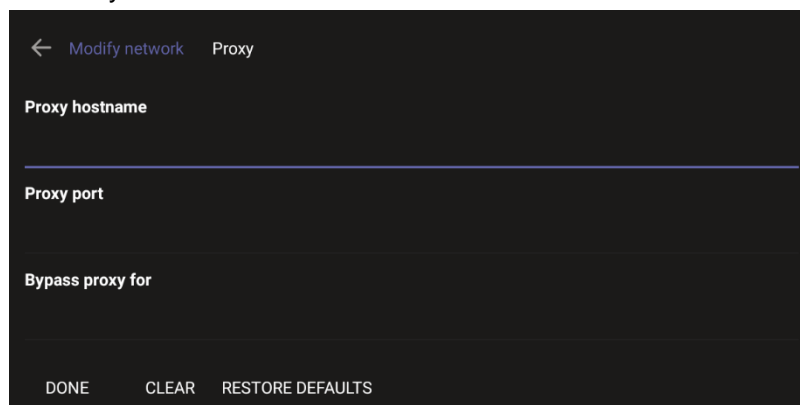

- ◆ Manually (from the screen shown in the preceding figure). Allows you to configure the RXV200 with an HTTP proxy server. Configure the proxy hostname and proxy port and then navigate to and select **Done**.
- ◆ **DHCP Option 252** (recommended). Option 252 provides a DHCP client with a URL to use to configure its proxy settings:

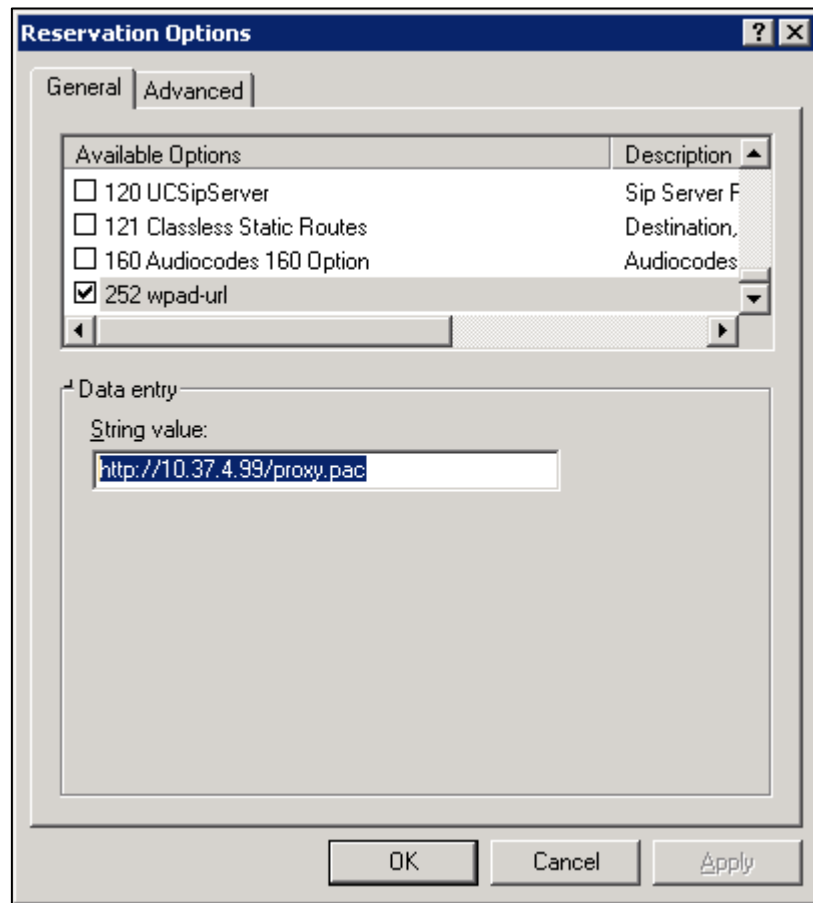

The proxy setting is provided in a Proxy Auto-Configuration (PAC) file that contains a set of rules coded in JavaScript which allows a web browser to determine whether to send web traffic directly to the Internet or to be sent via a proxy server. PAC files control how the phone handles HTTP, HTTPS, and FTP traffic. Example of a basic PAC file:


```
function FindProxyForURL(url, host)
{
return "PROXY 10.13.2.40:3128";
}
```

- 802.1x Settings [Allows enabling 802.1x]

802.1X Authentication is the IEEE Standard for Port-based Network Access Control (PNAC). See <https://1.ieee802.org/security/802-1x/> for more information.

- VLAN Settings

- ◆ Allows you to configure 'VLAN Discovery mode' to Manual configuration, Automatic configuration (CDP), Automatic configuration (LLDP) or Automatic configuration (CDP+LLDP)]

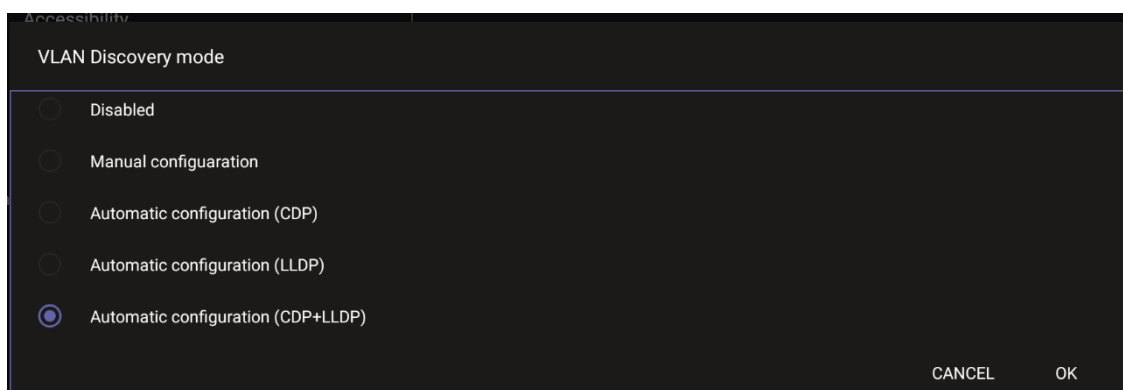


Cisco Discovery Protocol (CDP) is a Cisco proprietary Data Link Layer protocol  
Link Layer Discovery Protocol (LLDP) is a standard, layer two discovery protocol



**Note:** The VLAN configuration is by default **data VLAN** rather than voice VLAN, in compliance with the requirement specified [here](#) for the device not to advertise itself as a voice device. The default CDP/LLDP configuration is **data VLAN**.

- ◆ Allows you to configure 'VLAN Interval'.

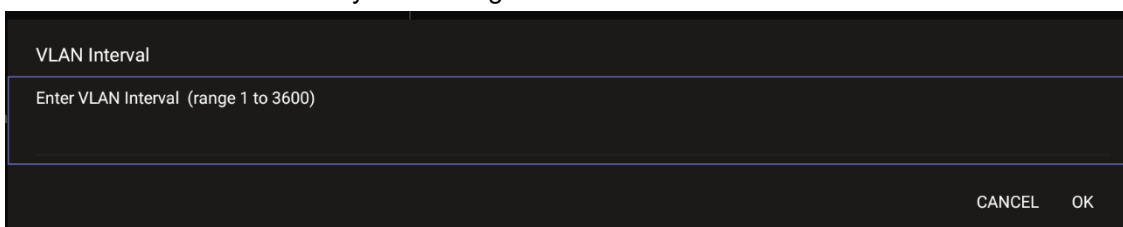

'VLAN interval' refers to CDP/LLDP advertisements' periodic interval. Default: 30 seconds. You can increase or decrease the intervals between the CDP/LLDP packets that are sent, based on network traffic and topology.



**Note:**


- In versions before 1.19, if network VLAN mode '/network/lan/vlan/mode' was set to LLDP, the device retrieved the VLAN and LLDP switch information (for location purposes) from LLDP.
- From version 1.19, LLDP switch information (for location purposes) is retrieved when parameter network/lan/lldp/enabled=1 (even when VLAN is retrieved from **CDP** or VLAN is disabled or VLAN is **Manual**).

## 5.1.13 Configuring Call Settings


This setting enables the user to configure call-associated functionalities to suit personal preferences.

➤ **To configure call settings:**

1. From the home page, navigate to and select **More** and then navigate to and select **Settings**.

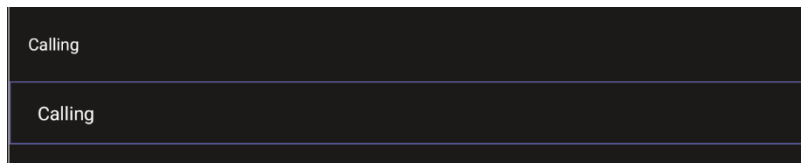

2. Navigate to and select **Calling**.

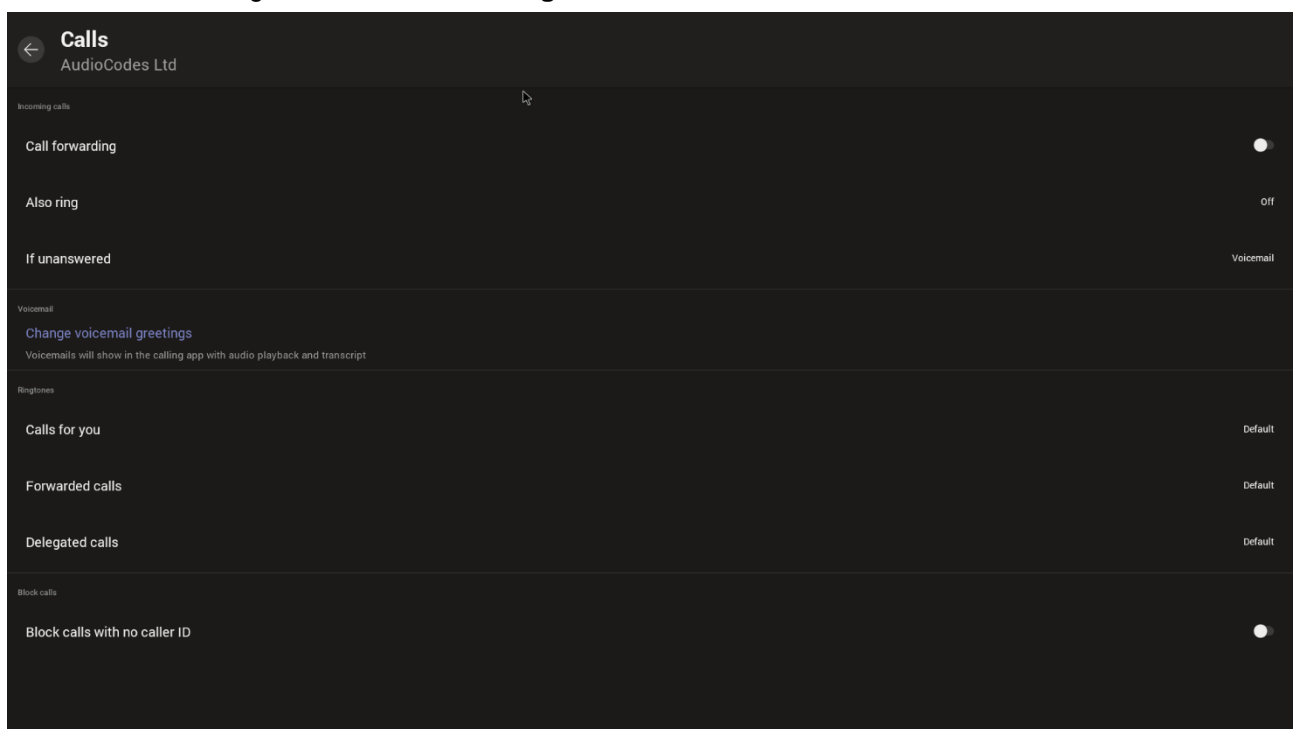

- In the Calls screen, navigate to and select:
  - ◆ **Call forwarding** to enable automatically redirecting incoming calls to another destination.
  - ◆ **Also ring** to configure other phones to ring on incoming calls; only displayed if **Call forwarding** is disabled.
  - ◆ **If unanswered** to configure the destination to which unanswered calls will be sent; only displayed if **Call forwarding** is disabled. Select either Off, Voicemail, Contact or number.
  - ◆ **Calls for you** to configure the ringtone played on your phone when calls come in.
  - ◆ **Forwarded calls**
  - ◆ **Delegated calls** to configure the ringtone played to delegates.
  - ◆ **Block calls with no caller ID** to block calls that do not have a Caller ID.

This page is intentionally left blank.

## 5.2 User Settings


In the 'Settings' screen you can optionally configure the following User settings: Sound, Accessibility, Reboot and About (read-only).

### 5.2.1 Setting the Volume

You can customize phone volume for a friendlier user experience.

➤ **To configure sound settings:**

- Under 'User', navigate to and select **Sound**.

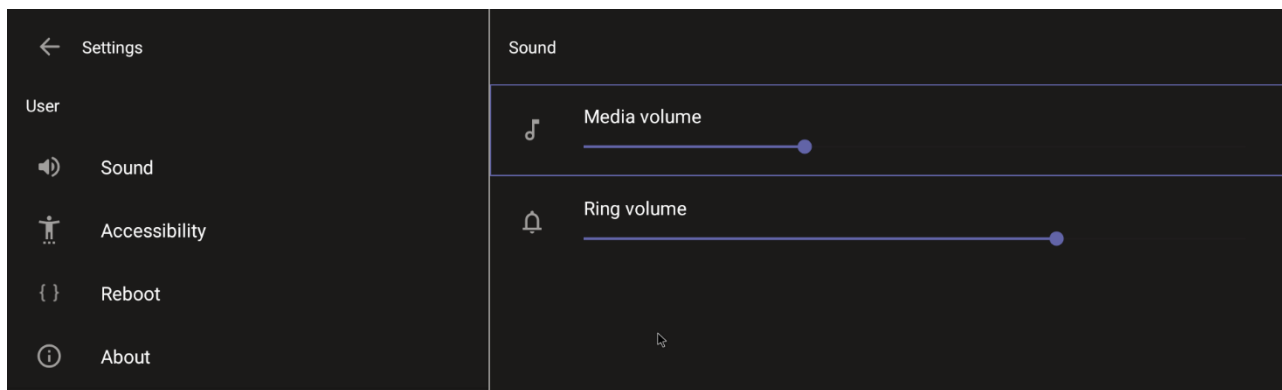


### 5.2.2 Configuring Accessibility Settings

This option allows users to customize the screen to be reader-friendlier.

➤ **To configure the Accessibility setting:**

- 3. Under 'User', navigate to and select **Accessibility**.

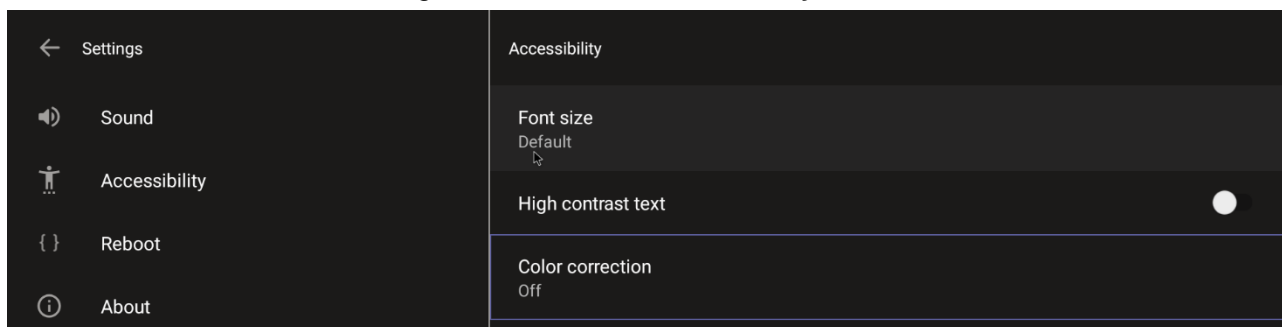

- 4. Adjust the settings to suit personal requirements.

### 5.2.3 Setting Live Captions

Live Captions can be set in regular one-on-one calls as well as in Teams meetings.



## 5.2.4 Enabling Display of Meeting Name using Exchange Online PowerShell

See [here](#) for information about how to access the exchange instance (the tenant). Admin must set the two parameters indicated in the figure below to 'False':

```
PS C:\Users\wayne> Get-CalendarProcessing -Identity Maxim_MTR | FL


AutomateProcessing           : AutoAccept
AllowConflicts              : False
AllowDistributionGroup       : True
AllowMultipleResources       : True
BookingType                 : Standard
BookingWindowInDays         : 180
MaximumDurationInMinutes     : 1440
MinimumDurationInMinutes     : 0
AllowRecurringMeetings      : True
EnforceAdjacencyAsOverlap    : False
EnforceCapacity              : False
EnforceSchedulingHorizon     : True
ScheduleOnlyDuringWorkHours  : False
ConflictPercentageAllowed    : 0
MaximumConflictInstances     : 0
ForwardRequestsToDelegates   : True
DeleteAttachments           : True
DeleteComments              : False
RemovePrivateProperty        : False
DeleteSubject               : False
AddOrganizerToSubject        : False
DeleteNonCalendarItems      : True
TentativePendingApproval    : True
EnableResponseDetails       : True
OrganizerInfo               : True
ResourceDelegates            : {}
RequestOutOfPolicy           : {}
AllRequestOutOfPolicy        : False
BookInPolicy                : {}
AllBookInPolicy             : True
RequestInPolicy              : {}
AllRequestInPolicy           : False
AddAdditionalResponse        : True
AdditionalResponse           : This is a Microsoft Teams Meeting room!
RemoveOldMeetingMessages     : True
AddNewRequestsTentatively    : True
ProcessExternalMeetingMessages : True
RemoveForwardedMeetingNotifications : False
AutoRSVPConfiguration       : Microsoft.Exchange.Data.Storage.AutoRSVPConfiguration
RemoveCanceledMeetings       : False
EnableAutoRelease            : False
PostReservationMaxClaimTimeInMinutes : 10
MailboxOwnerId               : Maxim_MTR
Identity                    : Maxim_MTR
IsValid                     : True
ObjectState                  : Changed
```

'Identity' is the name of the account to which admin wants to apply these two settings:

- Set-CalendarProcessing -Identity "Maxim\_MTR" -DeleteSubject \$false
- Set-CalendarProcessing -Identity "Maxim\_MTR" -AddOrganizerToSubject \$false

## 5.2.5 Hiding Names and Meeting Titles

You can hide information such as names and meeting titles for individual devices via the Meetings page (**More > Settings > Meetings**):

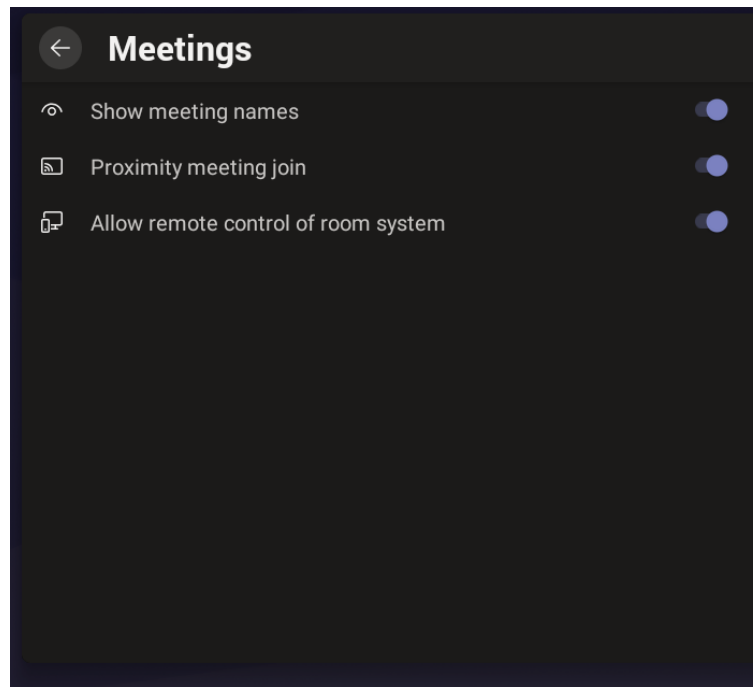


## 5.2.6 Rebooting RXV200

Rebooting allows you to exit from and reconnect without needing to sign in again.

### ➤ To reboot:

- Under 'User', navigate to and select **Reboot**.

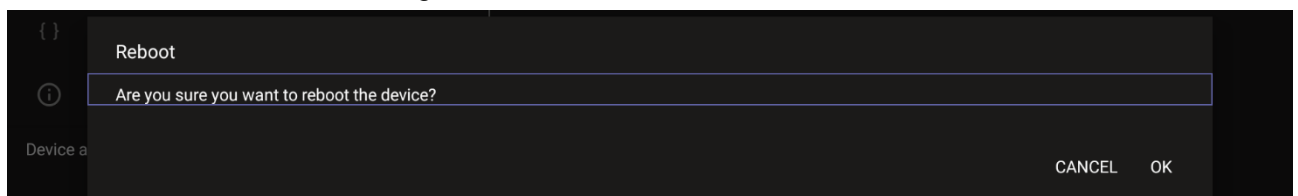


## 5.2.7 Viewing About RXV200


The 'About' screen gives you quick access to information about the RXV200 deployment.

### ➤ To access the About screen:

1. Navigate to and select **About device**.

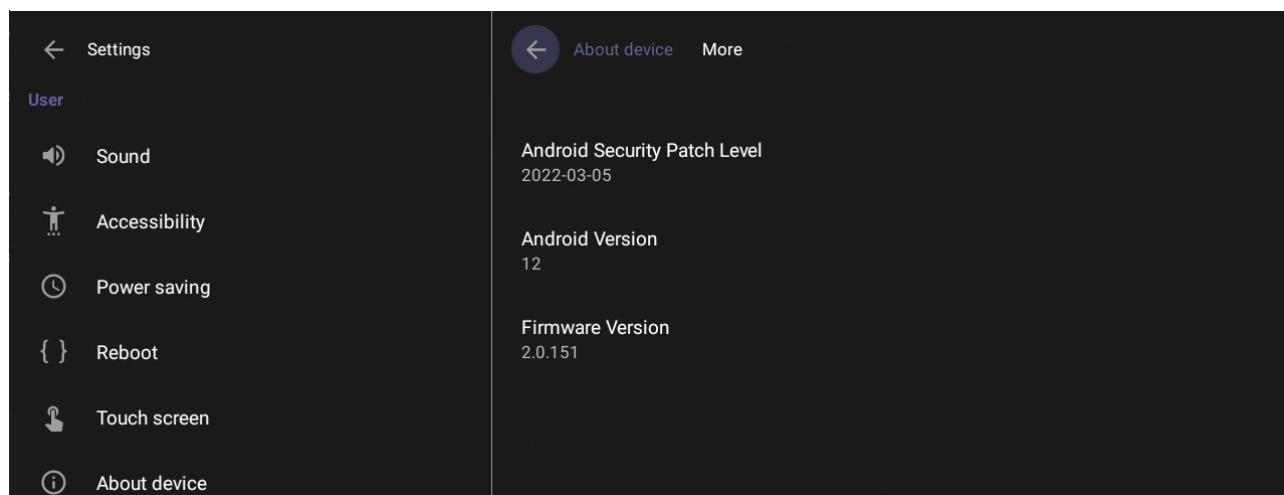

2. Navigate to and select **Status**.

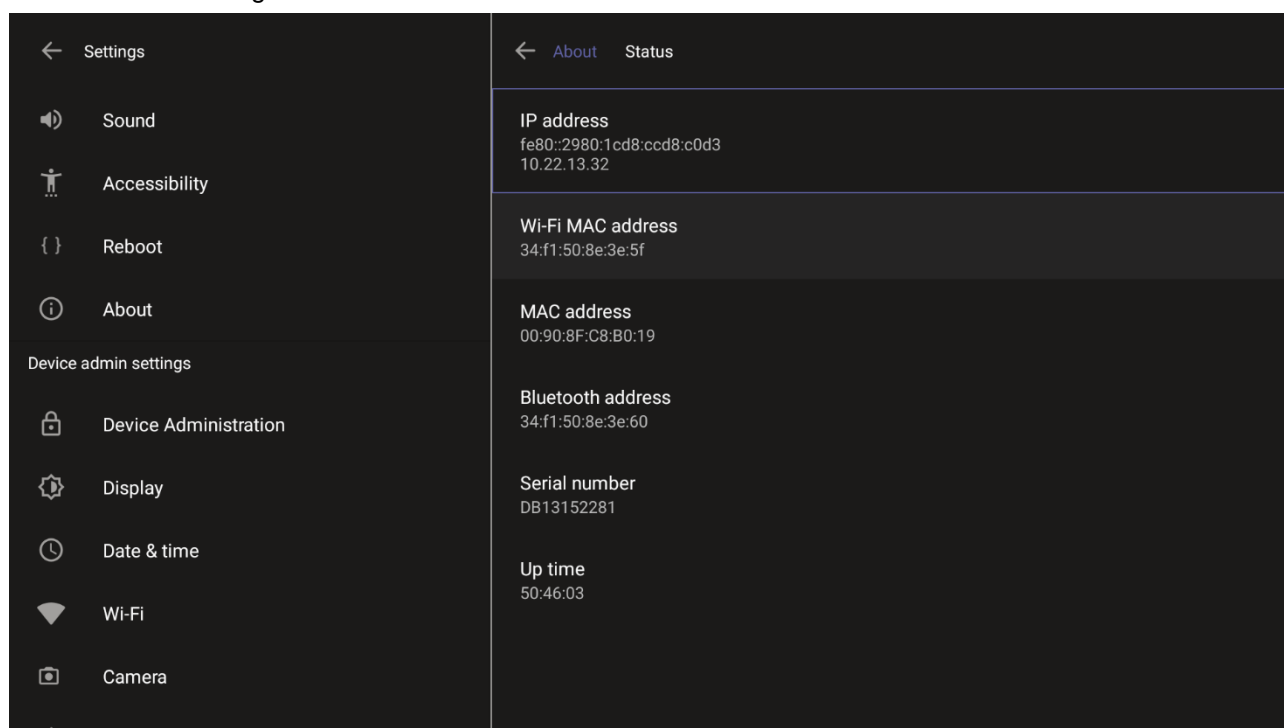

3. View the RXV200's firmware information.
4. Admins can monitor the status of the device's software modules from the System State page.

This page is intentionally left blank.


## 6 Monitoring Modules Operational States

AudioCodes provides out-of-the-box troubleshooting capability: Admins can monitor the state of the device's modules from the System State page. If initial provisioning is unsuccessful or if admin encounters an issue related to the network / connection to Device Manager, the feature gives admin an indication as to why.

The feature enables debugging via the device's screen *without requiring external systems*. Admin can check connectivity *independently of external apps*.


➤ **To monitor the device's modules states:**

- Open the System State page (**Settings > Debugging > System State**).

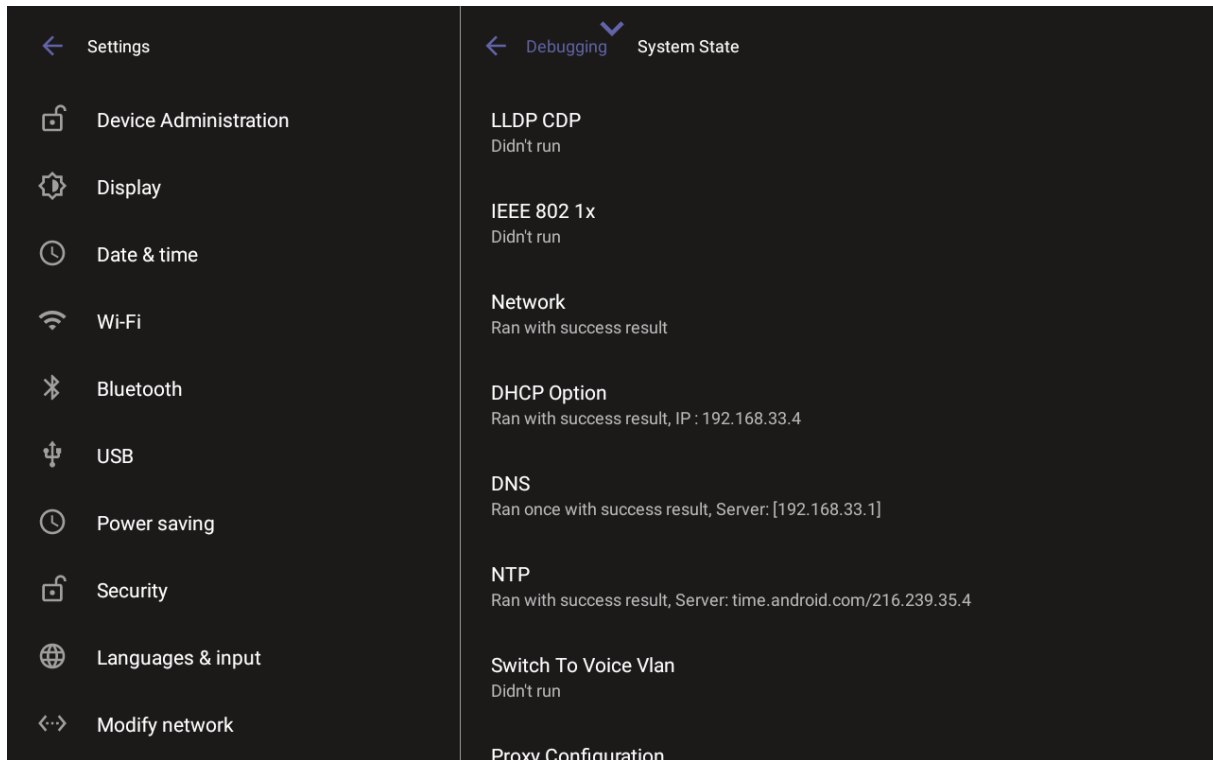

**Note:**

- Each state displays its operational result: Successful or Failed
- For some states, the reason of failure will be displayed as well.

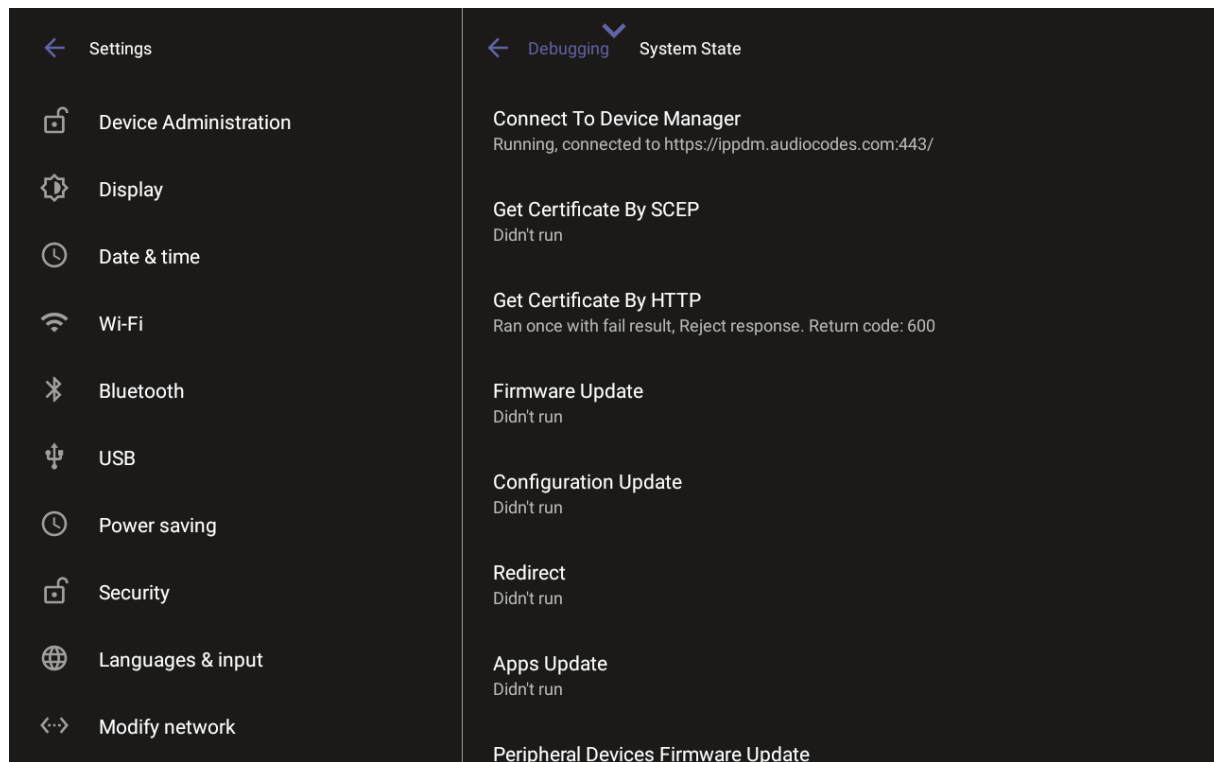

**Note:**


- Each state displays its operational result - successful or failed.
- For some states, the reason of failure will be displayed as well.

## 7 Debugging

Admin users can perform debugging for troubleshooting purposes.

➤ **To perform debugging:**

1. In the Settings screen under 'Device administration', select **Debugging**.

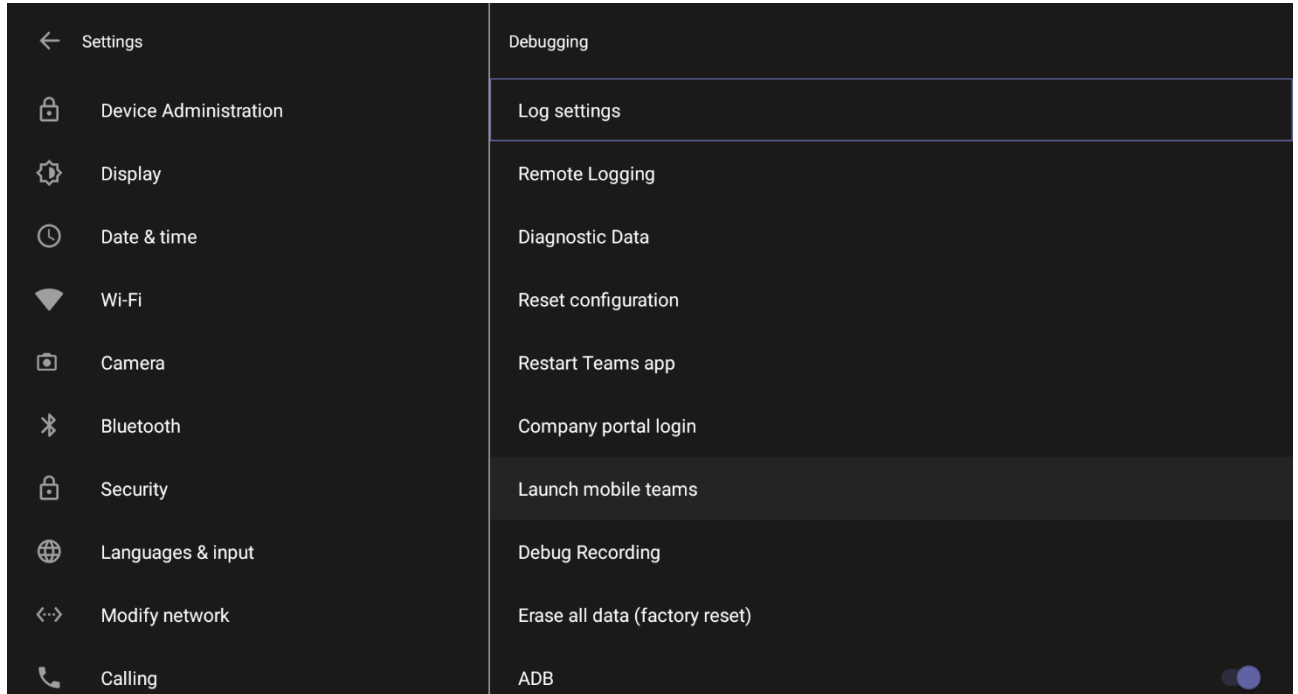

2. Use the following debugging features available to Admin users:


- Log settings (see [Log Settings](#))
- Remote Logging (see under [Remote Logging](#))
- Diagnostic Data (see under [Diagnostic Data](#))
- Reset configuration (see under [Reset configuration](#))
- Restart Teams app (see under [Restart Teams app](#))
- Company portal login (see under [Company Portal Login](#))
- Launch mobile teams (see under [Launch Mobile Teams](#))
- Debug Recording (see under [Debug Recording](#))
- Erase all data (see under [Erase all data \(factory reset\)](#))
- Screen Capture (see under [Screen Capture](#))

### 7.1.1.1 Log Settings | Collecting Logs


Device diagnostics (Logcat) can be collected using the Microsoft Admin Portal. For support purposes, general logs can be collected also using the Microsoft Admin Portal. The logs can help debug Teams application issues and also for issues related to the device.

➤ **To configure log settings:**

1. In the Debugging screen, select **Log settings**.

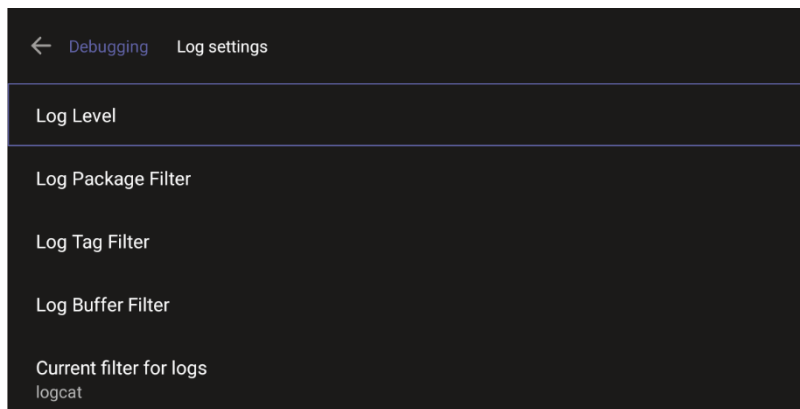

2. Navigate to and select **Log Level** and then select either
  - Verbose, Debug, Info, Warning, Error, Assert -or-None
3. Navigate to and select **Log Package Filter** and enter the filter.
4. Navigate to and select **Log Tag Filter** and enter the filter.
5. Navigate to and select **Log Buffer Filter**.

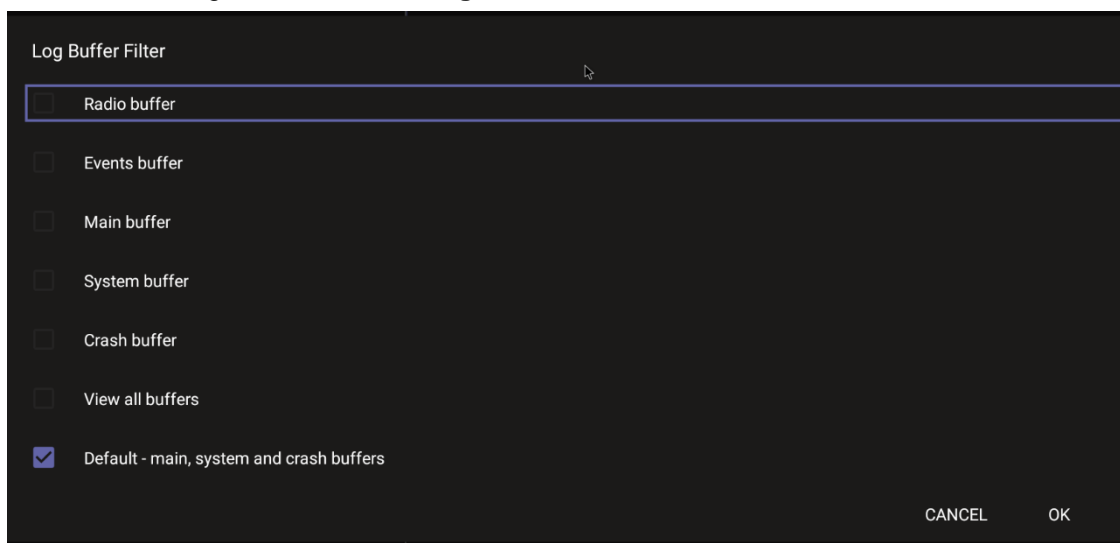


6. Navigate to and select **Current filter for logs**.

➤ **To collect logs:**


7. Reproduce the issue
8. Access Microsoft Admin Portal and under the **Devices** tab click the **Diagnostics** icon.



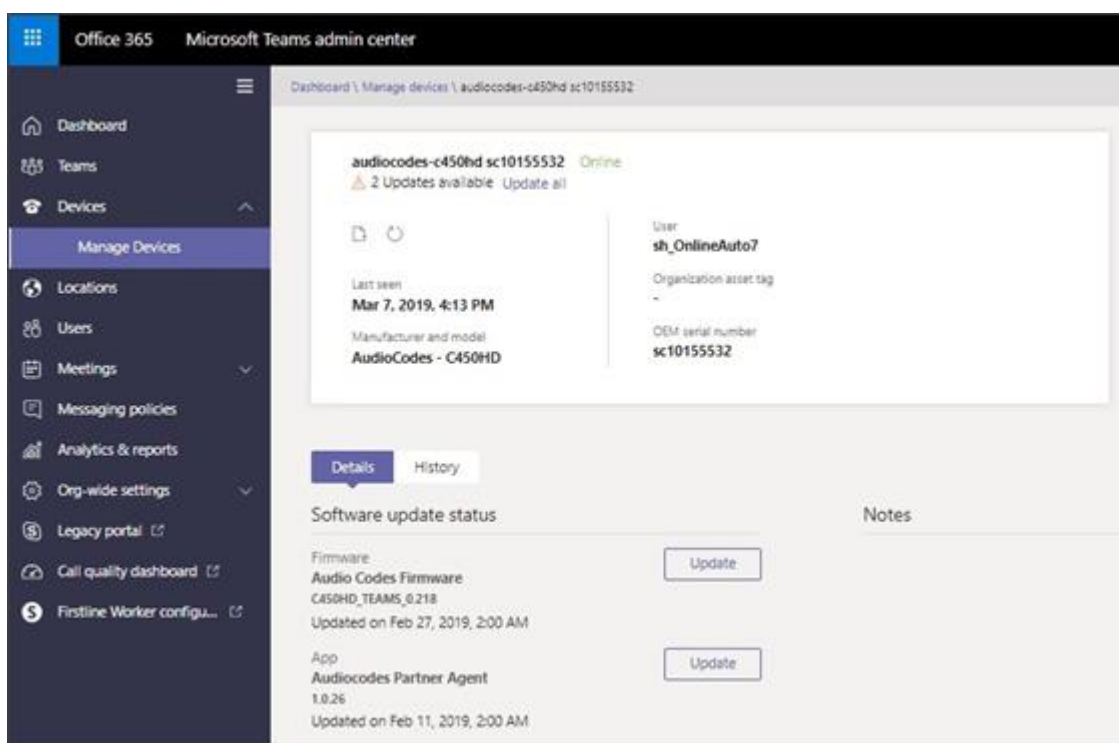


**Note:** The preceding figure is for illustrative purposes. It shows an AudioCodes phone. The same screen is displayed for the RXV200.


9. Click the **Diagnostics** icon.

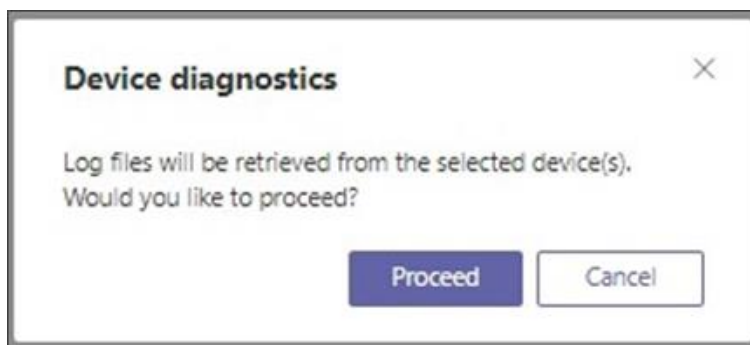

10. Click **Proceed**; the logs are uploaded to the server.

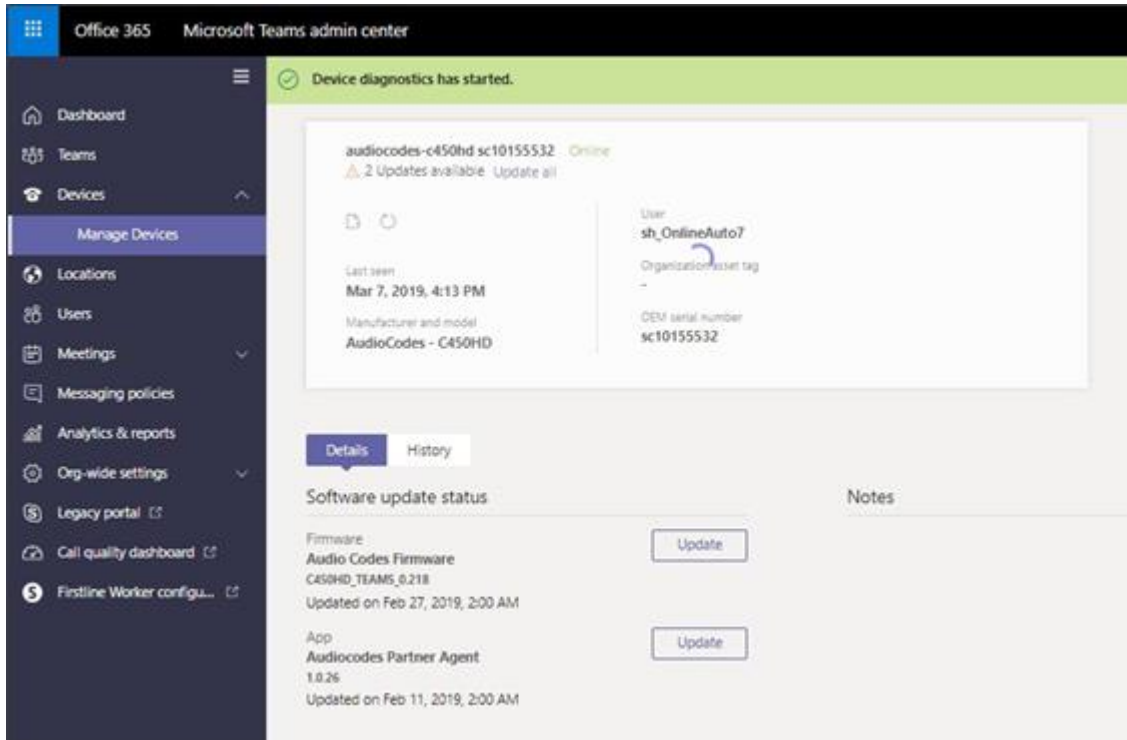

11. Click the **History** tab.

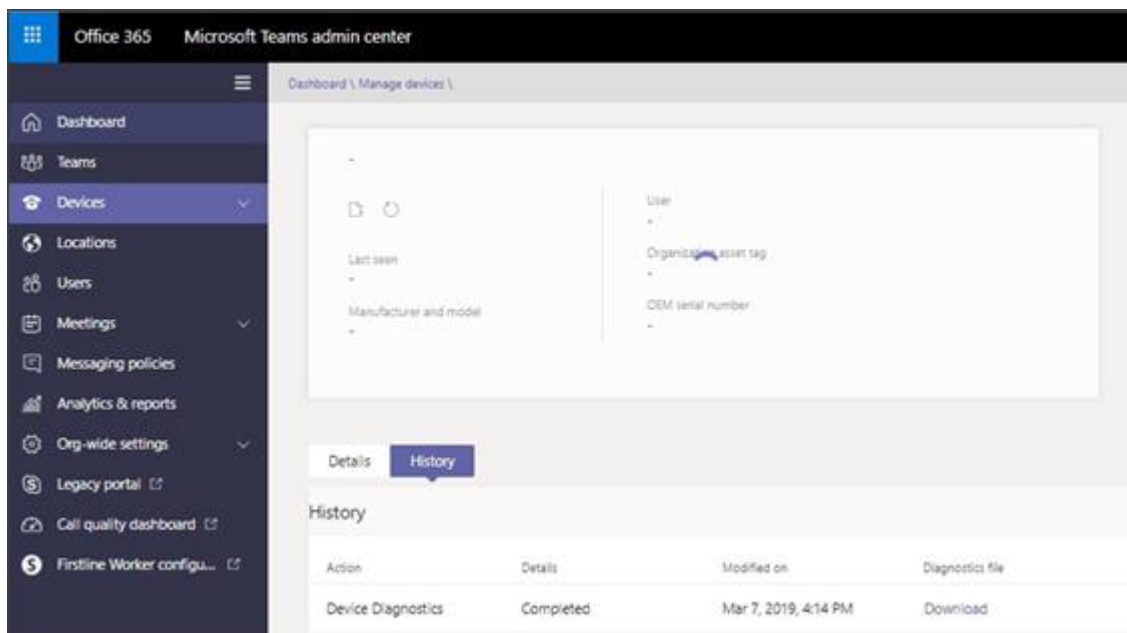

12. Click **Download** to download the logs.

### 7.1.1.2 Remote Logging

Remote Logging via Syslog provides the same log level as Device Diagnostics (performed via the Microsoft Admin Portal) with some additional information that may be relevant to device issues (not Teams application issues).

Diagnostics via the Microsoft Admin Portal are saved to the device sdcard and collected after the event. Remote Logging via Syslog is different. The logs are collected in real time.

➤ **To enable Remote Logging via Syslog:**

1. Navigate to and select **Remote logging**.

2. Configure the 'Remote IP address' and 'Remote port' and enable 'Remote Logging'; the device starts sending logs to the Syslog server.



**Note:** Network administrators can also enable Syslog using Secure Shell (SSH) protocol.

➤ **To enable Syslog using SSH protocol, type the following command at the shell prompt:**

```
setprop persist.ac.rl_address <syslog_server_ip>:<port>.
```

➤ **To disable Syslog using SSH, type the following command at the shell prompt:**

```
setprop persist.ac.rl_address ""
```

### 7.1.1.3 Diagnostic Data

Admin users who need to get logs from the device can dump the logs to the phone's Secure Digital (SD) Card and then later collect them using Secure Copy Protocol (SCP) based on Secure Shell (SSH) protocol. Whenever an issue occurs, the Admin can dump the logs into the SD Card.

➤ **To use the tool:**

1. Navigate to and select **Diagnostic Data**.

2. Navigate to and select **OK** to confirm 'Copy logs to sdcard'; the RXV200 creates all necessary logs and copies them to the its SD Card / Logs folder.
3. Get the logs using SCP notation as follows:

```
scp -r admin@host_IP:/sdcard/logs/ .
```

Following are the relevant logs (version and ID may be different to those shown here):


- dmesg.log
- dumpstate-TEAMS\_1.3.16-undated.txt
- dumpstate\_log-undated-2569.txt
- logcat.log

### 7.1.1.4 Reset configuration

Admin users can opt to 'clean up' their configuration history and return the RXV200 to an Out of Box Experience (OOBE). If the Teams app isn't running well, this might help.

➤ **To reset the configuration:**

1. Navigate to and select **Reset configuration**.

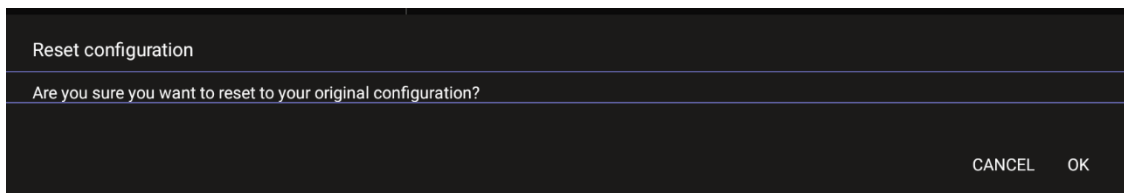

2. Navigate to and select **OK**; all data is erased and default factory settings are restored but sign-in is retained.

See also [here](#).


### 7.1.1.5 Restart Teams app

If the Teams application freezes or malfunctions, a good way to resolve this is to restart the app.

➤ **To restart the Teams app:**

- Navigate to and select **Restart Teams app**; only the Teams app is restarted.

### 7.1.1.6 Company Portal Login

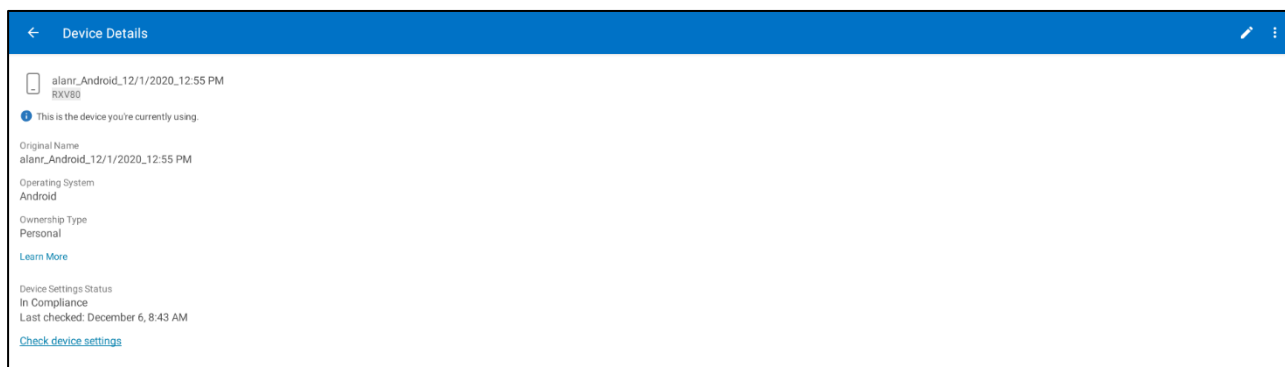


### 7.1.1.7 Getting Company Portal Logs

Company Portal logs can be helpful to network administrators when there are issues with signing in to Teams from the phone.

➤ **To get Company Portal logs:**

1. Reproduce the issue (logs are saved to the device so you first need to reproduce the issue and then get the logs).
2. Log in to the RXV200 as Administrator and then go back.
3. Navigate to and select the **Debugging** option.
4. Navigate to and select **Company Portal login**.
5. In the Device Details screen that opens, navigate to and select **Settings**:

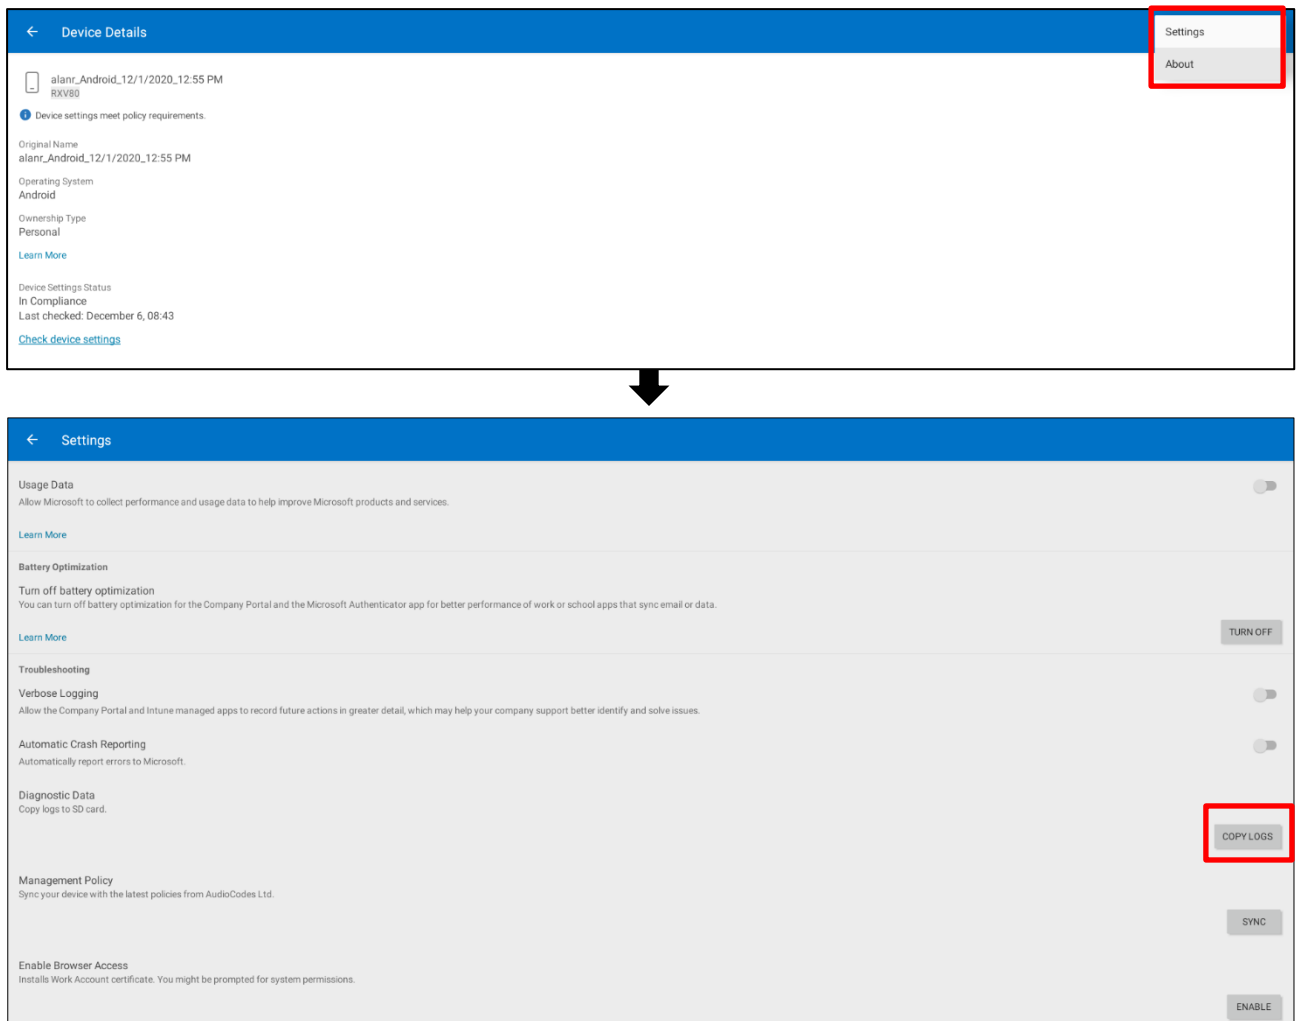

## 6. Navigate to and select **Copy Logs**.

Company portal logs are copied to:

```
sdcard/Android/data/com.microsoft.windowsintune.companyportal/files/
```

## 7. To pull the logs, use ssh:

```
scp -r admin@hosp_ip:/sdcard/android/data/com.microsoft.windowsintune.companyportal/files/
```

Files are quite heavy so you may need to pull them one by one.

### 7.1.1.8 Launch Mobile Teams

'App not found'. N/A in this release.

### 7.1.1.9 Debug Recording


This feature enables Admin users to perform media/DSP debugging.



**Note:** DSP recording can be activated on the fly without requiring the network administrator to reset the phone.

#### ➤ To reset the configuration:

1. Navigate to and select **Debug Recording**.

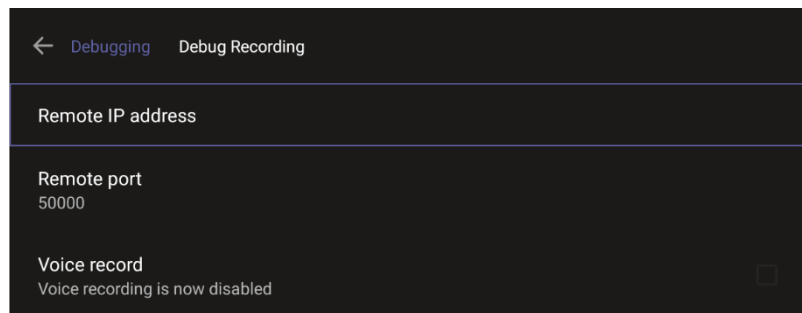


2. Navigate to and select **Voice record** to enable the feature.
3. Navigate to and select **Remote IP address** to input the IP address of the device whose traffic you want to record.
4. Navigate to and select **Remote port** and input it (Default: 50000).
5. Start Wireshark on your PC to capture audio traffic.

#### 7.1.1.10 Erase all data (factory reset)

This option is the equivalent of restore to defaults, including logout and device reboot.

➤ **To erase all data (factory reset):**

1. Navigate to and select Erase all data (factory reset).

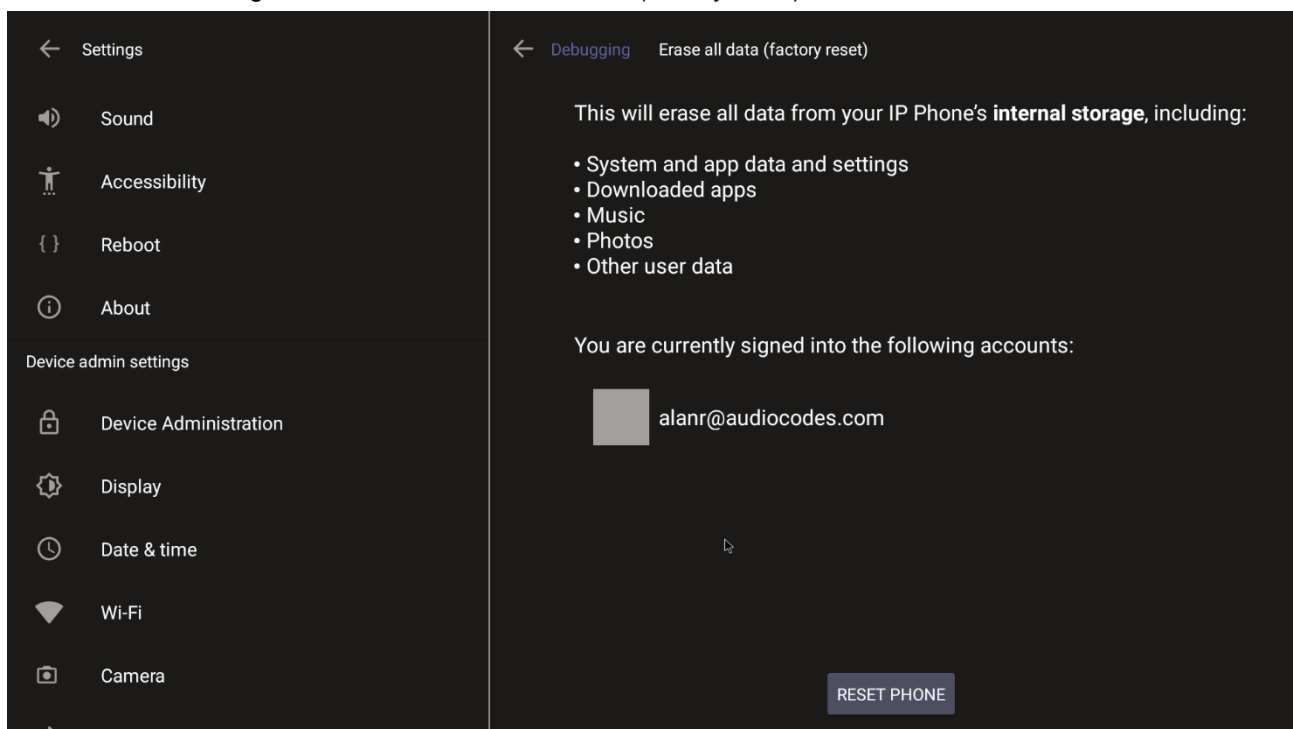

2. Navigate to and select **RESET PHONE**.

#### 7.1.1.11 Screen Capture

By default, this setting is enabled. If disabled, the phone won't allow its screens to be captured.

## 7.2 Determining Device Status from LED Color Indications

Users and admins can determine the status of the RXV200 from its LED color indications. Use the following table as reference to determine status.

**Table 7-1: RXV200 Status**

Color Indication	Status
Blue	Indicates the RXV200 is currently booting up
Green	Indicates the RXV200 is currently idle
Flashing red	Indicates the RXV200 is currently receiving an incoming call/meeting
Red	Indicates the RXV200 is currently in a call/ meeting/mute

## 7.3 Performing Recovery Operations using Power Button

Network administrators can perform recovery operations using the power button on the front panel of the RXV200.



**Note:** Besides this recovery option, Android devices also feature an independent, automatic problem detection and recovery attempt capability that can culminate in recovery mode or in switching image slots.

The following figure shows the power button.



### ➤ To perform recovery operations:

1. Disconnect the power cord from the RXV200 while long-pressing the power button shown in the preceding figure.
2. Reconnect the power cord and continue pressing the power button.

**Table 7-2: Recovery Operations**

Press button	Action	Press button for	LED indication after releasing the button
On Uboot	Nothing	<= 4 seconds	
	ENTER_RECOVERY	4 ~ 6 seconds	Red
	SWITCH_AB_SLOT	6 ~ 8 seconds	Green
	ENTER_LOADER	8 ~ 10 seconds	Blue
	RESTORE_DEFAULTS	>= 10 seconds	Yellow

3. Short-press the power button to move down the menu options and long-press it to select an action.

### ➤ To perform a factory reset (for example):

1. Short-press the power button to move down the menu options and long-press it to select



RESTORE\_DEFAULTS; wait for the button's LED to light up red and then release it; the device enters recovery mode.

2. Long-press the button again to perform a required device reboot.
3. After the device is rebooted, it loads as an out-of-band management (OOB) device.

## 7.4 Saving Logs while Device is in Recovery Mode

The device features USB log export while in recovery mode. This feature enables users to seamlessly save logs while their device is in recovery mode.

In Android recovery mode, the system automatically mounts a partition, enabling users to connect a USB stick.


By simply clicking the **Export logs to USB disk** option, all logs are efficiently copied to the USB stick, providing a convenient and reliable method for log management during recovery procedures.

## 7.5 Restoring RXV200 Firmware via USB Disk

For recovery purposes, firmware can be applied to the RXV200 from a USB disk.

➤ **To apply the firmware from the USB disk:**

1. Enter recovery mode by pressing for 2-4 seconds the power button (Action: ENTER\_RECOVERY); the device's LED lights up red.
2. Short-press the power button to move down the menu options, and long-press to select an option.
3. Insert the USB disk with the target firmware.

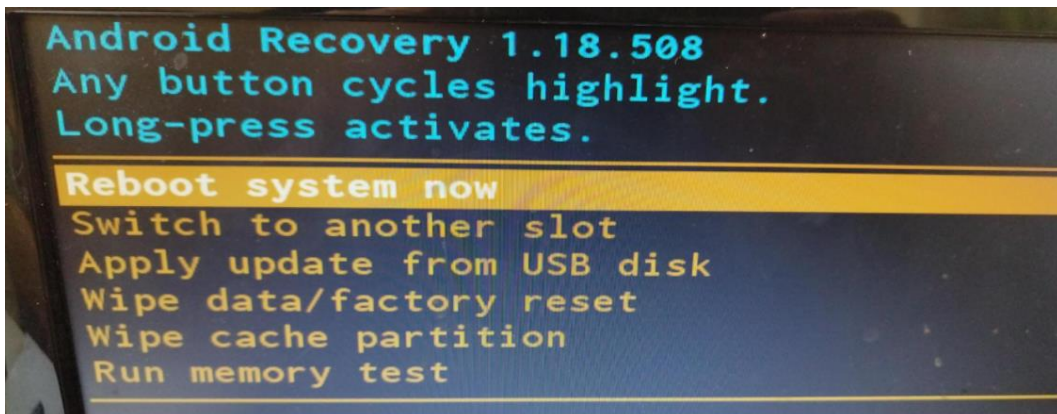

4. Select the **Apply update from USB disk** option and then choose the correct firmware image from the disk.

**International Headquarters**

6 Ofra Haza Street  
Naimi Park  
Or Yehuda, 6032303, Israel  
Tel: +972-3-976-4000  
Fax: +972-3-976-4040

**AudioCodes Inc.**

80 Kingsbridge Rd.,  
Piscataway, NJ 08854, USA  
Tel: +1-732-469-0880  
Fax: +1-732-469-2298

**Contact us:** <https://www.audiocodes.com/corporate/offices-worldwide>

**Website:** <https://www.audiocodes.com/>

©2024 AudioCodes Ltd. All rights reserved. AudioCodes, AC, HD VoIP, HD VoIP Sounds Better, IPmedia, Mediant, MediaPack, What's Inside Matters, OSN, SmartTAP, User Management Pack, VMAS, VolPerfect, VolPerfectHD, Your Gateway To VoIP, 3GX, VocaNom, AudioCodes One Voice, AudioCodes Meeting Insights, and AudioCodes Room Experience are trademarks or registered trademarks of AudioCodes Limited. All other products or trademarks are property of their respective owners. Product specifications are subject to change without notice.

Document #: LTRT-09984