

Performance Monitoring Guide

AudioCodes One Voice Operations Center (OVOC)

OVOC

Performance Monitoring

Version 8.0



Notice

Information contained in this document is believed to be accurate and reliable at the time of printing. However, due to ongoing product improvements and revisions, AudioCodes cannot guarantee accuracy of printed material after the Date Published nor can it accept responsibility for errors or omissions. Updates to this document can be downloaded from <https://www.audiocodes.com/library/technical-documents>.

This document is subject to change without notice.

Date Published: January-12-2022

WEEE EU Directive

Pursuant to the WEEE EU Directive, electronic and electrical waste must not be disposed of with unsorted waste. Please contact your local recycling authority for disposal of this product.

Customer Support

Customer technical support and services are provided by AudioCodes or by an authorized AudioCodes Service Partner. For more information on how to buy technical support for AudioCodes products and for contact information, please visit our website at <https://www.audiocodes.com/services-support/maintenance-and-support>.

Documentation Feedback

AudioCodes continually strives to produce high quality documentation. If you have any comments (suggestions or errors) regarding this document, please fill out the Documentation Feedback form on our website at <https://online.audiocodes.com/documentation-feedback>.

Stay in the Loop with AudioCodes



Related Documentation

Document Name
OVOC Documents
Migration from EMS and SEM Ver. 7.2 to One Voice Operations Center
One Voice Operations Center IOM Manual

Document Name
One Voice Operations Center Product Description
One Voice Operations Center User's Manual
Device Manager Pro Administrator's Manual
One Voice Operations Center Alarms Monitoring Guide
One Voice Operations Center Performance Monitoring Guide
One Voice Operations Center Security Guidelines
One Voice Operations Center Integration with Northbound Interfaces
Device Manager for Third-Party Vendor Products Administrator's Manual
Device Manager Agent Installation and Configuration Guide
ARM User's Manual
Documents for Managed Devices
Mediant 500 MSBR User's Manual
Mediant 500L MSBR User's Manual
Mediant 500Li MSBR User's Manual
Mediant 500L Gateway and E-SBC User's Manual
Mediant 800B Gateway and E-SBC User's Manual
Mediant 800 MSBR User's Manual
Mediant 1000B Gateway and E-SBC User's Manual
Mediant 1000B MSBR User's Manual
Mediant 2600 E-SBC User's Manual
Mediant 3000 User's Manual
Mediant 4000 SBC User's Manual
Mediant 9000 SBC User's Manual
Mediant Software SBC User's Manual

Document Name
Microsoft Teams Direct Routing SBA Installation and Maintenance Manual
Mediant 800B/1000B/2600B SBA for Skype for Business Installation and Maintenance Manual
Fax Server and Auto Attendant IVR Administrator's Guide
Voca Administrator's Guide
VoiceAI Connect Installation and Configuration Manual

Document Revision Record

LTRT	Description
94912	Added Sections: Gateway (REST) Analog Stats; Trunk (REST) Gateway Bri Stats and Gateway DS 1 Stats; Partition (REST); Port (REST); CPU (REST); System (REST) Metering License Stats
94913	Update for Version 8.0.1000
94914	Update for Version 8.0.2000
94915	Update for Version 8.0.3000: updates to Trunk Group (REST) parameters

Table of Contents

1	Introduction	1
2	Configuring Performance Monitoring Thresholds	3
3	CPU (REST)	5
	System CPU Stats	5
	CPU Utilization Average	5
	CPU Utilization Max	5
4	Gateway	7
	Call Failures	7
	IP to Tel Calls Terminated due to a Busy Line	7
	IP to Tel Calls Terminated due to No Answer	8
	IP to Tel Failed Calls due to No Matched Capabilities	8
	IP to Tel Failed Calls due to No Resources	9
	IP to Tel Failed Calls due to No Route	10
	IP to Tel Failed Calls due to Other Reasons	10
	Tel to IP Calls Terminated due to a Busy Line	11
	Tel to IP Calls Terminated due to No Answer	11
	Tel to IP Failed Calls due to No Matched Capabilities	12
	Tel to IP Failed Calls due to No Resources	12
	Tel to IP Failed Calls due to No Route	13
	Tel to IP Failed Calls due to Other Reasons	14
	Call Stats	14
	IP to Tel Call Attempts	15
	IP to Tel Call Duration [sec] Average	15
	IP to Tel Call Duration [sec] Max	16
	IP to Tel Call Duration [sec] Min	17
	IP to Tel Calls Terminated due to Forward	17
	IP to Tel Established Calls	18
	IP to Tel Fax Call Attempts	18
	IP to Tel Successful Fax Calls	19
	Tel to IP Fax Call Attempts	19
	Tel to IP Call Attempts	20
	Tel to IP Call Duration [sec] Average	21
	Tel to IP Call Duration [sec] Max	21
	Tel to IP Call Duration [sec] Min	22
	Tel to IP Calls Terminated due to Forward	22
	Tel to IP Established Calls	23
	Tel to IP Successful Fax Calls	24
5	Gateway (REST)	25
	Analog Stats	25
	Analog Active Lines Average	25
	Analog Active Lines Max	25

Call Stats	26
Active Calls Average	27
Active Calls IP 2 Tel Average	28
Active Calls IP 2 Tel Max	28
Active Calls Max	29
Active Calls Tel 2 IP Average	29
Active Calls Tel 2 IP Max	30
Answer Seizure Ratio Average	30
Attempted Calls IP 2 Tel	31
Attempted Calls Rate IP 2 Tel Average	31
Attempted Calls Rate IP 2 Tel Max	32
Attempted Calls Rate Tel 2 IP Average	32
Attempted Calls Rate Tel 2 IP Max	33
Attempted Calls Tel 2 IP	33
Attempted Fax IP 2 Tel	34
Attempted Fax Tel 2 IP	34
Average Call Duration Average	35
Established Calls IP 2 Tel	35
Established Calls Rate IP 2 Tel Average	36
Established Calls Rate IP 2 Tel Max	37
Established Calls Rate Tel 2 IP Average	37
Established Calls Rate Tel 2 IP Max	38
Established Calls Tel 2 IP	38
Established Fax IP 2 Tel	39
Established Fax Tel 2 IP	39
Failed Calls Busy IP 2 Tel	40
Failed Calls Busy Tel 2 IP	40
Failed Calls No Answer IP 2 Tel	41
Failed Calls No Answer Tel 2 IP	41
Failed Calls No Cap Match IP 2 Tel	42
Failed Calls No Cap Match Tel 2 IP	42
Failed Calls No Route IP 2 Tel	43
Failed Calls No Route Tel 2 IP	43
Failed Calls No Rsc IP 2 Tel	44
Failed Calls No Rsc Tel 2 IP	44
Failed Calls Other IP 2 Tel	45
Failed Calls Other Tel 2 IP	45
Forwarded Calls IP 2 Tel	46
Forwarded Calls Tel 2 IP	46
6 IP Group	47
Call Stats	47
ACD Average	48
ACD Max	48
ACD Min	49

ASR Average	50
ASR Max	50
ASR Min	51
In Attempted Calls	51
IN CAPS Average	52
IN CAPS Max	52
In Established Calls	53
In Invite Dialogs Average	54
In Invite Dialogs Max	54
In Invite Dialogs Min	55
In Short Calls	55
Invite Dialogs Average	56
Invite Dialogs Max	57
Invite Dialogs Min	57
Media Broken Connection Calls	58
NER Average	58
NER Max	59
NER Min	59
Out Attempted Calls	60
OUT CAPS Average	61
OUT CAPS Max	61
Out Established Calls	62
Out Invite Dialogs Average	62
Out Invite Dialogs Max	63
Out Invite Dialogs Min	64
Out Short Calls	64
Failure Stats	65
In User Defined Failures 1	67
In User Defined Failures 10	67
In User Defined Failures 11	68
In User Defined Failures 12	68
In User Defined Failures 13	69
In User Defined Failures 14	69
In User Defined Failures 15	70
In User Defined Failures 16	71
In User Defined Failures 17	71
In User Defined Failures 18	72
In User Defined Failures 19	72
In User Defined Failures 2	73
In User Defined Failures 20	74
In User Defined Failures 21	74
In User Defined Failures 22	75
In User Defined Failures 23	75
In User Defined Failures 24	76
In User Defined Failures 25	76

In User Defined Failures 26	77
In User Defined Failures 3	78
In User Defined Failures 4	78
In User Defined Failures 5	79
In User Defined Failures 6	79
In User Defined Failures 7	80
In User Defined Failures 8	81
In User Defined Failures 9	81
Out User Defined Failures 1	82
Out User Defined Failures 10	82
Out User Defined Failures 11	83
Out User Defined Failures 12	83
Out User Defined Failures 13	84
Out User Defined Failures 14	85
Out User Defined Failures 15	85
Out User Defined Failures 16	86
Out User Defined Failures 17	86
Out User Defined Failures 18	87
Out User Defined Failures 19	88
Out User Defined Failures 2	88
Out User Defined Failures 20	89
Out User Defined Failures 21	89
Out User Defined Failures 22	90
Out User Defined Failures 23	90
Out User Defined Failures 24	91
Out User Defined Failures 25	92
Out User Defined Failures 26	92
Out User Defined Failures 3	93
Out User Defined Failures 4	93
Out User Defined Failures 5	94
Out User Defined Failures 6	95
Out User Defined Failures 7	95
Out User Defined Failures 8	96
Out User Defined Failures 9	96
Other Stats	97
Dialogs	97
In Attempted Registrations	98
In Subscribe Dialogs Average	99
In Subscribe Dialogs Max	99
In Subscribe Dialogs Min	100
In Successful Registrations	100
Out Attempted Registrations	101
Out Subscribe Dialogs Average	101
Out Subscribe Dialogs Max	102
Out Subscribe Dialogs Min	103

Out Successful Registrations	103
Subscribe Dialogs Average	104
Subscribe Dialogs Max	104
Subscribe Dialogs Min	105
7 IP Group (REST)	106
Gateway Call Stats	106
Active Calls Average	107
Active Calls IP 2 Tel Average	108
Active Calls IP 2 Tel Max	108
Active Calls Max	109
Active Calls Tel 2 IP Average	109
Active Calls Tel 2 IP Max	110
Answer Seizure Ratio Average	110
Attempted Calls IP 2 Tel	111
Attempted Calls Rate IP 2 Tel Average	111
Attempted Calls Rate IP 2 Tel Max	112
Attempted Calls Rate Tel 2 IP Average	112
Attempted Calls Rate Tel 2 IP Max	113
Attempted Calls Tel 2 IP	113
Attempted Fax IP 2 Tel	114
Attempted Fax Tel 2 IP	114
Average Call Duration Average	115
Established Calls IP 2 Tel	115
Established Calls Rate IP 2 Tel Average	116
Established Calls Rate IP 2 Tel Max	117
Established Calls Rate Tel 2 IP Average	117
Established Calls Rate Tel 2 IP Max	118
Established Calls Tel 2 IP	118
Established Fax IP 2 Tel	119
Established Fax Tel 2 IP	119
Failed Calls Busy IP 2 Tel	120
Failed Calls Busy Tel 2 IP	120
Failed Calls No Answer IP 2 Tel	121
Failed Calls No Answer Tel 2 IP	121
Failed Calls No Cap Match IP 2 Tel	122
Failed Calls No Cap Match Tel 2 IP	122
Failed Calls No Route IP 2 Tel	123
Failed Calls No Route Tel 2 IP	123
Failed Calls No Rsc IP 2 Tel	124
Failed Calls No Rsc Tel 2 IP	124
Failed Calls Other IP 2 Tel	125
Failed Calls Other Tel 2 IP	125
Forwarded Calls IP 2 Tel	126
Forwarded Calls Tel 2 IP	126

Media Coder Stats	127
Coder AMRNB Average	128
Coder AMRNB Max	129
Coder AMRWB Average	129
Coder AMRWB Max	130
Coder EVRC Average	130
Coder EVRC Max	131
Coder G 711 alaw Average	131
Coder G 711 alaw Max	132
Coder G 711 Average	132
Coder G 711 Max	133
Coder G 711 ulaw Average	133
Coder G 711 ulaw Max	134
Coder G 722 Average	134
Coder G 722 Max	135
Coder G 723 Average	135
Coder G 723 Max	136
Coder G 726 Average	136
Coder G 726 Max	137
Coder G 729 Average	137
Coder G 729 EV Average	138
Coder G 729 EV Max	138
Coder G 729 Max	139
Coder GSMEFR Average	139
Coder GSMEFR Max	140
Coder GSMFR Average	140
Coder GSMFR Max	141
Coder ILBC Average	141
Coder ILBC Max	142
Coder OPUSNB Average	142
Coder OPUSNB Max	143
Coder OPUSWB Average	143
Coder OPUSWB Max	144
Coder Other Average	144
Coder Other Max	145
Coder QCELP Average	145
Coder QCELP Max	146
Coder RTA Average	146
Coder RTA Max	147
Coder SILKNB Average	147
Coder SILKNB Max	148
Coder SILKWB Average	148
Coder SILKWB Max	149
Coder T 38 Average	149
Coder T 38 Max	150

Media Media Stats	150
Media Bandwidth In Average	152
Media Bandwidth Out Average	152
Media Delay In Average	153
Media Delay In Max	153
Media Delay In Min	154
Media Delay Out Average	154
Media Delay Out Max	155
Media Delay Out Min	155
Media Jitter In Average	156
Media Jitter In Max	156
Media Jitter In Min	157
Media Jitter Out Average	157
Media Jitter Out Max	158
Media Jitter Out Min	158
Media K Bytes In	159
Media K Bytes Out	159
Media MOS In Average	160
Media MOS In Max	160
Media MOS In Min	161
Media MOS Out Average	161
Media MOS Out Max	162
Media MOS Out Min	162
Media Packet Loss In Average	163
Media Packet Loss In Max	163
Media Packet Loss In Min	164
Media Packet Loss Out Average	164
Media Packet Loss Out Max	165
Media Packet Loss Out Min	165
Media Packets In	166
Media Packets Out	166
Media Quality In Max	167
Media Quality In Min	167
Media Quality Out Max	168
Media Quality Out Min	168
Media RTP Streams Average	169
Media RTP Streams Max	169
Media SIP Rec Streams Average	170
Media SIP Rec Streams Max	170
Media SRTP Streams Average	171
Media SRTP Streams Max	171
Media Streams Average	172
Media Streams Max	172
Media Web RTC Streams Average	173
Media Web RTC Streams Max	173

SBC Call Stats	174
Abnormal Terminated Calls In	175
Abnormal Terminated Calls Out	176
Active Calls In Average	176
Active Calls In Max	177
Active Calls Out Average	177
Active Calls Out Max	178
Admission Failed Calls In	178
Admission Failed Calls Out	179
Answer Seizure Ratio Average	179
Attempted Calls In	180
Attempted Calls Out	180
Attempted Calls Rate In Average	181
Attempted Calls Rate In Max	181
Attempted Calls Rate Out Average	182
Attempted Calls Rate Out Max	182
Average Call Duration Average	183
Busy Calls In	183
Busy Calls Out	184
Established Calls In	185
Established Calls Out	185
Established Calls Rate In Average	186
Established Calls Rate In Max	186
Established Calls Rate Out Average	187
Established Calls Rate Out Max	187
Forwarded Calls In	188
Forwarded Calls Out	188
Long Calls Counter	189
Media Broken Connection Calls	189
Media Mismatch Calls In	190
Media Mismatch Calls Out	190
Minutes Of Usage	191
Network Effectiveness Ratio Average	191
No Answer Calls In	192
No Answer Calls Out	192
No Resources Calls In	193
No Resources Calls Out	193
No Route Calls In	194
Not Establish Calls In	194
Not Establish Calls Out	195
Not Establish Failed Calls In	195
Not Establish Failed Calls Out	196
Not Establish Success Calls In	196
Not Establish Success Calls Out	197
Other Reason Calls In	197

Other Reason Calls Out	198
Post Dial Delay Average	198
Post Dial Delay Max	199
Post Dial Delay Min	199
Short Calls Counter	200
SBC Other Stats	200
Active Subscribes Average	201
Active Subscribes Max	202
Failed Other Dialogs In	202
Failed Other Dialogs Out	203
Failed Register Admission In	204
Failed Register Admission Out	204
Failed Register In	205
Failed Register No Route In	205
Failed Register Other In	206
Failed Register Other Out	206
Failed Register Out	207
Failed Subscribe In	207
Failed Subscribe Out	208
Other Dialogs Average	208
Other Dialogs In	209
Other Dialogs Out	209
Other Dialogs Rate In Average	210
Other Dialogs Rate In Max	210
Other Dialogs Rate Out Average	211
Other Dialogs Rate Out Max	211
Register In	212
Register Out	212
Register Rate In Average	213
Register Rate In Max	213
Register Rate Out Average	214
Register Rate Out Max	214
Registered Users Average	215
Registered Users Max	215
SBC Attempted Registrations	216
SBC Registration Success Ratio Average	216
SBC Successful Registrations	217
Subscribe In	217
Subscribe Out	218
Subscribe Rate In Average	218
Subscribe Rate In Max	219
Subscribe Rate Out Average	219
Subscribe Rate Out Max	220
Transaction Rate Average	220
Transaction Rate Max	221

User Registration Success Ratio Average	221
User Successful Registrations	222
SBC SIP Rec Stats	222
SIP Rec Rate Average	222
SIP Rec Sessions Average	223
SIP Rec Sessions Max	223
SBC User Defined	224
User Defined Failures In 1	226
User Defined Failures In 10	226
User Defined Failures In 11	226
User Defined Failures In 12	227
User Defined Failures In 13	227
User Defined Failures In 14	228
User Defined Failures In 15	228
User Defined Failures In 16	228
User Defined Failures In 17	229
User Defined Failures In 18	229
User Defined Failures In 19	230
User Defined Failures In 2	230
User Defined Failures In 20	230
User Defined Failures In 21	231
User Defined Failures In 22	231
User Defined Failures In 23	232
User Defined Failures In 24	232
User Defined Failures In 25	232
User Defined Failures In 26	233
User Defined Failures In 3	233
User Defined Failures In 4	234
User Defined Failures In 5	234
User Defined Failures In 6	234
User Defined Failures In 7	235
User Defined Failures In 8	235
User Defined Failures In 9	236
User Defined Failures Out 1	236
User Defined Failures Out 10	236
User Defined Failures Out 11	237
User Defined Failures Out 12	237
User Defined Failures Out 13	238
User Defined Failures Out 14	238
User Defined Failures Out 15	238
User Defined Failures Out 16	239
User Defined Failures Out 17	239
User Defined Failures Out 18	240
User Defined Failures Out 19	240
User Defined Failures Out 2	240

User Defined Failures Out 20	241
User Defined Failures Out 21	241
User Defined Failures Out 22	242
User Defined Failures Out 23	242
User Defined Failures Out 24	242
User Defined Failures Out 25	243
User Defined Failures Out 26	243
User Defined Failures Out 3	244
User Defined Failures Out 4	244
User Defined Failures Out 5	244
User Defined Failures Out 6	245
User Defined Failures Out 7	245
User Defined Failures Out 8	246
User Defined Failures Out 9	246
8 Media (REST)	247
Cluster Stats	247
DSP Cluster Utilization Average	247
DSP Cluster Utilization Max	248
Media Cluster Utilization Average	248
Media Cluster Utilization Max	249
Coder Stats	249
Coder AMRNB Average	251
Coder AMRNB Max	251
Coder AMRWB Average	252
Coder AMRWB Max	252
Coder EVRC Average	253
Coder EVRC Max	253
Coder G 711 alaw Average	254
Coder G 711 alaw Max	254
Coder G 711 Average	255
Coder G 711 Max	255
Coder G 711 ulaw Average	256
Coder G 711 ulaw Max	256
Coder G 722 Average	257
Coder G 722 Max	257
Coder G 723 Average	258
Coder G 723 Max	258
Coder G 726 Average	259
Coder G 726 Max	259
Coder G 729 Average	260
Coder G 729 EV Average	260
Coder G 729 EV Max	261
Coder G 729 Max	261
Coder GSMEFR Average	262
Coder GSMEFR Max	262

Coder GSMFR Average	263
Coder GSMFR Max	263
Coder ILBC Average	264
Coder ILBC Max	264
Coder OPUSNB Average	265
Coder OPUSNB Max	265
Coder OPUSWB Average	266
Coder OPUSWB Max	266
Coder Other Average	267
Coder Other Max	267
Coder QCELP Average	268
Coder QCELP Max	268
Coder RTA Average	269
Coder RTA Max	269
Coder SILKNB Average	270
Coder SILKNB Max	270
Coder SILKWB Average	271
Coder SILKWB Max	271
Coder T 38 Average	272
Coder T 38 Max	272
DSP Stats	273
DSP Resource Current Percent Average	273
DSP Resource Current Percent Max	273
SBC Sessions Coder Transcoding Average	274
SBC Sessions Coder Transcoding Max	274
SBC Sessions Coder Transcoding Percent Average	275
SBC Sessions Coder Transcoding Percent Max	275
SBC Transcoding Failed Allocation	276
Media Stats	276
Media Bandwidth In Average	278
Media Bandwidth Out Average	278
Media Delay In Average	279
Media Delay In Max	279
Media Delay In Min	280
Media Delay Out Average	280
Media Delay Out Max	281
Media Delay Out Min	281
Media Jitter In Average	282
Media Jitter In Max	282
Media Jitter In Min	283
Media Jitter Out Average	283
Media Jitter Out Max	284
Media Jitter Out Min	284
Media K Bytes In	285
Media K Bytes Out	285

Media MOS In Average	286
Media MOS In Max	286
Media MOS In Min	287
Media MOS Out Average	288
Media MOS Out Max	288
Media MOS Out Min	289
Media Packet Loss In Average	289
Media Packet Loss In Max	290
Media Packet Loss In Min	290
Media Packet Loss Out Average	291
Media Packet Loss Out Max	291
Media Packet Loss Out Min	292
Media Packets In	292
Media Packets Out	293
Media Quality In Max	293
Media Quality In Min	294
Media Quality Out Max	294
Media Quality Out Min	295
Media RTP Streams Average	295
Media RTP Streams Max	296
Media SIP Rec Streams Average	296
Media SIP Rec Streams Max	297
Media SRTP Streams Average	297
Media SRTP Streams Max	298
Media Streams Average	298
Media Streams Max	299
Media Web RTC Streams Average	299
Media Web RTC Streams Max	300
9 Media Realm (REST)	301
Media Media Stats	301
Media Bandwidth In Average	302
Media Bandwidth Out Average	302
Media Delay In Average	303
Media Delay In Max	304
Media Delay In Min	304
Media Delay Out Average	305
Media Delay Out Max	305
Media Delay Out Min	306
Media Jitter In Average	306
Media Jitter In Max	307
Media Jitter In Min	308
Media Jitter Out Average	308
Media Jitter Out Max	309
Media Jitter Out Min	309
Media K Bytes In	310

Media K Bytes Out	310
Media MOS In Average	311
Media MOS In Max	312
Media MOS In Min	312
Media MOS Out Average	313
Media MOS Out Max	313
Media MOS Out Min	314
Media Packet Loss In Average	315
Media Packet Loss In Max	315
Media Packet Loss In Min	316
Media Packet Loss Out Average	316
Media Packet Loss Out Max	317
Media Packet Loss Out Min	317
Media Packets In	318
Media Packets Out	319
Media Quality In Max	319
Media Quality In Min	320
Media Quality Out Max	320
Media Quality Out Min	321
10 Network (REST)	322
DDOS Stats	322
Attempted SIP TIs Conn	323
BI Dropped	323
Conntrack Dropped	324
GI Drop Rate Average	324
GI Drop Rate Max	325
GI Dropped	325
GI Processed	326
GI Ratio Average	326
GI Ratio Max	327
Non SIP Packets	327
Rejected SIP TIs Conn	328
SIP Packets	328
Syn Drop Rate Average	329
Syn Drop Rate Max	329
Syn Dropped	330
Syn Processed	330
WI Drop Rate Average	331
WI Drop Rate Max	331
WI Dropped	332
WI Entries Average	332
WI Entries Max	333
WI Processed	333
WI Ratio Average	334
WI Ratio Max	334

Ha Stats	335
Ha Active Packet Loss Average	335
Ha Active Packet Loss Max	335
Ha Redundant Packet Loss Average	336
Ha Redundant Packet Loss Max	336
11 Partition (REST)	338
System Storage Stats	338
Storage Usage Average	338
Storage Usage Max	338
Storage Utilization Average	339
Storage Utilization Max	339
12 Port (REST)	341
Network Port Stats	341
Broadcast In	342
Broadcast Out	342
Bytes In	343
Bytes Out	343
Carrier Errors Out	344
Collisions	344
Compressed In	344
Compressed Out	345
Discard In	345
Dropped In	346
Dropped Out	346
FCS Error In	346
FCS Error Out	347
FIFO Error In	347
FIFO Error Out	348
Frame Error In	348
Multicast In	349
Multicast Out	349
Packets In	350
Packets Out	350
Unicast In	350
Unicast Out	351
13 SBC	352
Call Stats	352
ACD Average	355
ACD Max	355
ACD Min	356
AMR Active Calls Average	356
AMR Active Calls Max	357
AMR Active Calls Min	358

AMR-WB Active Calls Average	358
AMR-WB Active Calls Max	359
AMR-WB Active Calls Min	359
ASR Average	360
ASR Max	360
ASR Min	361
Attempted Calls	362
EG711 Active Calls Average	362
EG711 Active Calls Max	363
EG711 Active Calls Min	363
EVRC Active Calls Average	364
EVRC Active Calls Max	365
EVRC Active Calls Min	365
G711 Active Calls Average	366
G711 Active Calls Max	366
G711 Active Calls Min	367
G711A Active Calls Average	367
G711A Active Calls Max	368
G711A Active Calls Min	369
G711U Active Calls Average	369
G711U Active Calls Max	370
G711U Active Calls Min	370
G722 Active Calls Average	371
G722 Active Calls Max	372
G722 Active Calls Min	372
G723 Active Calls Average	373
G723 Active Calls Max	373
G723 Active Calls Min	374
G726 Active Calls Average	374
G726 Active Calls Max	375
G726 Active Calls Min	376
G727 Active Calls Average	376
G727 Active Calls Max	377
G727 Active Calls Min	377
G728 Active Calls Average	378
G728 Active Calls Max	379
G728 Active Calls Min	379
G729a Active Calls Average	380
G729a Active Calls Max	380
G729a Active Calls Min	381
G729e Active Calls Average	381
G729e Active Calls Max	382
G729e Active Calls Min	383
G729EV Active Calls Average	383
G729EV Active Calls Max	384

G729EV Active Calls Min	384
GSM Active Calls Average	385
GSM Active Calls Max	386
GSM Active Calls Min	386
ILBC Active Calls Average	387
ILBC Active Calls Max	387
ILBC Active Calls Min	388
In Attempted Calls	388
IN CAPS Average	389
IN CAPS Max	390
IN CAPS Min	390
In Established Calls	391
In Short Calls	391
Media Broken Connection Calls	392
NER Average	393
NER Max	393
NER Min	394
Out Attempted Calls	394
OUT CAPS Average	395
OUT CAPS Max	395
Out Established Calls	396
Out Short Calls	397
QCELP Active Calls Average	397
QCELP Active Calls Max	398
QCELP Active Calls Min	398
RTA Active Calls Average	399
RTA Active Calls Max	400
RTA Active Calls Min	400
SILK Active Calls Average	401
SILK Active Calls Max	401
SILK Active Calls Min	402
SPEEX Active Calls Average	402
SPEEX Active Calls Max	403
SPEEX Active Calls Min	404
VOXADPCM Active Calls Average	404
VOXADPCM Active Calls Max	405
VOXADPCM Active Calls Min	405
Failure Stats	406
In User Defined Failures 1	408
In User Defined Failures 10	408
In User Defined Failures 11	409
In User Defined Failures 12	409
In User Defined Failures 13	410
In User Defined Failures 14	411
In User Defined Failures 15	411

In User Defined Failures 16	412
In User Defined Failures 17	412
In User Defined Failures 18	413
In User Defined Failures 19	413
In User Defined Failures 2	414
In User Defined Failures 20	415
In User Defined Failures 21	415
In User Defined Failures 22	416
In User Defined Failures 23	416
In User Defined Failures 24	417
In User Defined Failures 25	418
In User Defined Failures 26	418
In User Defined Failures 3	419
In User Defined Failures 4	419
In User Defined Failures 5	420
In User Defined Failures 6	420
In User Defined Failures 7	421
In User Defined Failures 8	422
In User Defined Failures 9	422
Out User Defined Failures 1	423
Out User Defined Failures 10	423
Out User Defined Failures 11	424
Out User Defined Failures 12	425
Out User Defined Failures 13	425
Out User Defined Failures 14	426
Out User Defined Failures 15	426
Out User Defined Failures 16	427
Out User Defined Failures 17	427
Out User Defined Failures 18	428
Out User Defined Failures 19	429
Out User Defined Failures 2	429
Out User Defined Failures 20	430
Out User Defined Failures 21	430
Out User Defined Failures 22	431
Out User Defined Failures 23	432
Out User Defined Failures 24	432
Out User Defined Failures 25	433
Out User Defined Failures 26	433
Out User Defined Failures 3	434
Out User Defined Failures 4	434
Out User Defined Failures 5	435
Out User Defined Failures 6	436
Out User Defined Failures 7	436
Out User Defined Failures 8	437
Out User Defined Failures 9	437

Other Stats	438
In Attempted Registrations	439
In Successful Registrations	439
Media Legs Average	440
Media Legs Max	440
Media Legs Min	441
Out Attempted Registrations	441
Out Successful Registrations	442
Registered Users Average	443
Registered Users Max	443
Registered Users Min	444
Transcoding Sessions Average	444
Transcoding Sessions Max	445
Transcoding Sessions Min	446
Quality Stats	446
RTP delay Average	446
RTP delay Max	447
RTP delay Min	448
RTP jitter Average	448
RTP jitter Max	449
RTP jitter Min	449
Rx RTP Packet Loss Max	450
Tx RTP Packet Loss Max	451
14 SBC (REST)	452
Call Stats	452
Abnormal Terminated Calls In	454
Abnormal Terminated Calls Out	454
Active Calls In Average	455
Active Calls In Max	455
Active Calls Out Average	456
Active Calls Out Max	456
Active Sessions Average	457
Active Sessions Max	457
Admission Failed Calls In	457
Admission Failed Calls Out	458
Answer Seizure Ratio Average	458
Attempted Calls In	459
Attempted Calls Out	459
Attempted Calls Rate In Average	460
Attempted Calls Rate In Max	460
Attempted Calls Rate Out Average	461
Attempted Calls Rate Out Max	462
Average Call Duration Average	462
Busy Calls In	463
Busy Calls Out	463

Classification Failed Calls In	464
Established Calls In	464
Established Calls Out	465
Established Calls Rate In Average	465
Established Calls Rate In Max	466
Established Calls Rate Out Average	466
Established Calls Rate Out Max	467
Forwarded Calls In	467
Forwarded Calls Out	468
Long Calls Counter	468
Media Broken Connection Calls	469
Media Mismatch Calls In	469
Media Mismatch Calls Out	470
Minutes Of Usage	470
Network Effectiveness Ratio Average	471
No Answer Calls In	471
No Answer Calls Out	472
No Resources Calls In	472
No Resources Calls Out	473
No Route Calls In	473
Not Establish Calls In	474
Not Establish Calls Out	474
Not Establish Failed Calls In	475
Not Establish Failed Calls Out	475
Not Establish Success Calls In	476
Not Establish Success Calls Out	476
Other Reason Calls In	477
Other Reason Calls Out	477
Post Dial Delay Average	478
Post Dial Delay Max	478
Post Dial Delay Min	479
Short Calls Counter	479
Other Stats	480
Active Subscribes Average	481
Active Subscribes Max	481
Failed Other Dialogs In	482
Failed Other Dialogs Out	483
Failed Register Admission In	483
Failed Register Admission Out	484
Failed Register Classification In	484
Failed Register In	485
Failed Register No Route In	485
Failed Register Other In	486
Failed Register Other Out	486
Failed Register Out	487

Failed Subscribe In	487
Failed Subscribe Out	488
Other Dialogs Average	488
Other Dialogs In	489
Other Dialogs Out	489
Other Dialogs Rate In Average	490
Other Dialogs Rate In Max	490
Other Dialogs Rate Out Average	491
Other Dialogs Rate Out Max	491
Register In	492
Register Out	492
Register Rate In Average	493
Register Rate In Max	493
Register Rate Out Average	494
Register Rate Out Max	494
Registered Users Average	495
Registered Users Max	495
SBC Attempted Registrations	496
SBC Registration Success Ratio Average	496
SBC Successful Registrations	497
Subscribe In	497
Subscribe Out	498
Subscribe Rate In Average	498
Subscribe Rate In Max	499
Subscribe Rate Out Average	499
Subscribe Rate Out Max	500
Transaction Rate Average	500
Transaction Rate Max	501
User Registration Success Ratio Average	501
User Successful Registrations	502
SIP Rec Stats	502
SIP Rec Rate Average	502
SIP Rec Sessions Average	503
SIP Rec Sessions Max	503
User Defined	504
User Defined Failures In 1	506
User Defined Failures In 10	506
User Defined Failures In 11	506
User Defined Failures In 12	507
User Defined Failures In 13	507
User Defined Failures In 14	508
User Defined Failures In 15	508
User Defined Failures In 16	508
User Defined Failures In 17	509
User Defined Failures In 18	509

User Defined Failures In 19	510
User Defined Failures In 2	510
User Defined Failures In 20	510
User Defined Failures In 21	511
User Defined Failures In 22	511
User Defined Failures In 23	512
User Defined Failures In 24	512
User Defined Failures In 25	512
User Defined Failures In 26	513
User Defined Failures In 3	513
User Defined Failures In 4	514
User Defined Failures In 5	514
User Defined Failures In 6	514
User Defined Failures In 7	515
User Defined Failures In 8	515
User Defined Failures In 9	516
User Defined Failures Out 1	516
User Defined Failures Out 10	516
User Defined Failures Out 11	517
User Defined Failures Out 12	517
User Defined Failures Out 13	518
User Defined Failures Out 14	518
User Defined Failures Out 15	518
User Defined Failures Out 16	519
User Defined Failures Out 17	519
User Defined Failures Out 18	520
User Defined Failures Out 19	520
User Defined Failures Out 2	520
User Defined Failures Out 20	521
User Defined Failures Out 21	521
User Defined Failures Out 22	522
User Defined Failures Out 23	522
User Defined Failures Out 24	522
User Defined Failures Out 25	523
User Defined Failures Out 26	523
User Defined Failures Out 3	524
User Defined Failures Out 4	524
User Defined Failures Out 5	524
User Defined Failures Out 6	525
User Defined Failures Out 7	525
User Defined Failures Out 8	526
User Defined Failures Out 9	526
15 SRD	527
Call Stats	527
ACD Average	528

ACD Max	528
ACD Min	529
ASR Average	529
ASR Max	530
ASR Min	530
In Attempted Calls	531
IN CAPS Average	532
IN CAPS Max	532
In Established Calls	533
In Short Calls	533
Invite Dialogs	534
Media Broken Connection Calls	535
NER Average	535
NER Max	536
NER Min	536
Out Attempted Calls	537
OUT CAPS Average	537
OUT CAPS Max	538
Out Established Calls	539
Out Short Calls	539
Failure Stats	540
In User Defined Failures 1	542
In User Defined Failures 10	542
In User Defined Failures 11	543
In User Defined Failures 12	543
In User Defined Failures 13	544
In User Defined Failures 14	544
In User Defined Failures 15	545
In User Defined Failures 16	546
In User Defined Failures 17	546
In User Defined Failures 18	547
In User Defined Failures 19	547
In User Defined Failures 2	548
In User Defined Failures 20	549
In User Defined Failures 21	549
In User Defined Failures 22	550
In User Defined Failures 23	550
In User Defined Failures 24	551
In User Defined Failures 25	551
In User Defined Failures 26	552
In User Defined Failures 3	553
In User Defined Failures 4	553
In User Defined Failures 5	554
In User Defined Failures 6	554
In User Defined Failures 7	555

In User Defined Failures 8	556
In User Defined Failures 9	556
Out User Defined Failures 1	557
Out User Defined Failures 10	557
Out User Defined Failures 11	558
Out User Defined Failures 12	558
Out User Defined Failures 13	559
Out User Defined Failures 14	560
Out User Defined Failures 15	560
Out User Defined Failures 16	561
Out User Defined Failures 17	561
Out User Defined Failures 18	562
Out User Defined Failures 19	563
Out User Defined Failures 2	563
Out User Defined Failures 20	564
Out User Defined Failures 21	564
Out User Defined Failures 22	565
Out User Defined Failures 23	565
Out User Defined Failures 24	566
Out User Defined Failures 25	567
Out User Defined Failures 26	567
Out User Defined Failures 3	568
Out User Defined Failures 4	568
Out User Defined Failures 5	569
Out User Defined Failures 6	570
Out User Defined Failures 7	570
Out User Defined Failures 8	571
Out User Defined Failures 9	571
Other Stats	572
Dialogs	572
In Attempted Registrations	573
In Successful Registrations	573
Out Attempted Registrations	574
Out Successful Registrations	575
16 SRD (REST)	576
SBC Call Stats	576
Abnormal Terminated Calls In	578
Abnormal Terminated Calls Out	578
Active Calls In Average	579
Active Calls In Max	579
Active Calls Out Average	580
Active Calls Out Max	580
Admission Failed Calls In	581
Admission Failed Calls Out	581

Answer Seizure Ratio Average	582
Attempted Calls In	582
Attempted Calls Out	583
Attempted Calls Rate In Average	583
Attempted Calls Rate In Max	584
Attempted Calls Rate Out Average	584
Attempted Calls Rate Out Max	585
Average Call Duration Average	585
Busy Calls In	586
Busy Calls Out	586
Classification Failed Calls In	587
Established Calls In	587
Established Calls Out	588
Established Calls Rate In Average	588
Established Calls Rate In Max	589
Established Calls Rate Out Average	589
Established Calls Rate Out Max	590
Forwarded Calls In	590
Forwarded Calls Out	591
Long Calls Counter	591
Media Broken Connection Calls	592
Media Mismatch Calls In	592
Media Mismatch Calls Out	593
Minutes Of Usage	593
Network Effectiveness Ratio Average	594
No Answer Calls In	594
No Answer Calls Out	595
No Resources Calls In	595
No Resources Calls Out	596
No Route Calls In	596
Not Establish Calls In	597
Not Establish Calls Out	597
Not Establish Failed Calls In	598
Not Establish Failed Calls Out	598
Not Establish Success Calls In	599
Not Establish Success Calls Out	599
Other Reason Calls In	600
Other Reason Calls Out	600
Post Dial Delay Average	601
Post Dial Delay Max	601
Post Dial Delay Min	602
Short Calls Counter	602
SBC Other Stats	603
Active Subscribes Average	604
Active Subscribes Max	604

Failed Other Dialogs In	605
Failed Other Dialogs Out	606
Failed Register Admission In	606
Failed Register Admission Out	607
Failed Register Classification In	607
Failed Register In	608
Failed Register No Route In	608
Failed Register Other In	609
Failed Register Other Out	609
Failed Register Out	610
Failed Subscribe In	610
Failed Subscribe Out	611
Other Dialogs Average	611
Other Dialogs In	612
Other Dialogs Out	612
Other Dialogs Rate In Average	613
Other Dialogs Rate In Max	613
Other Dialogs Rate Out Average	614
Other Dialogs Rate Out Max	614
Register In	615
Register Out	615
Register Rate In Average	616
Register Rate In Max	616
Register Rate Out Average	617
Register Rate Out Max	617
Registered Users Average	618
Registered Users Max	618
SBC Attempted Registrations	619
SBC Registration Success Ratio Average	619
SBC Successful Registrations	620
Subscribe In	620
Subscribe Out	621
Subscribe Rate In Average	621
Subscribe Rate In Max	622
Subscribe Rate Out Average	622
Subscribe Rate Out Max	623
Transaction Rate Average	623
Transaction Rate Max	624
User Registration Success Ratio Average	624
User Successful Registrations	625
SBC SIP Rec Stats	625
SIP Rec Rate Average	625
SIP Rec Sessions Average	626
SIP Rec Sessions Max	626
SBC User Defined	627

User Defined Failures In 1	629
User Defined Failures In 10	629
User Defined Failures In 11	629
User Defined Failures In 12	630
User Defined Failures In 13	630
User Defined Failures In 14	631
User Defined Failures In 15	631
User Defined Failures In 16	631
User Defined Failures In 17	632
User Defined Failures In 18	632
User Defined Failures In 19	633
User Defined Failures In 2	633
User Defined Failures In 20	633
User Defined Failures In 21	634
User Defined Failures In 22	634
User Defined Failures In 23	635
User Defined Failures In 24	635
User Defined Failures In 25	635
User Defined Failures In 26	636
User Defined Failures In 3	636
User Defined Failures In 4	637
User Defined Failures In 5	637
User Defined Failures In 6	637
User Defined Failures In 7	638
User Defined Failures In 8	638
User Defined Failures In 9	639
User Defined Failures Out 1	639
User Defined Failures Out 10	639
User Defined Failures Out 11	640
User Defined Failures Out 12	640
User Defined Failures Out 13	641
User Defined Failures Out 14	641
User Defined Failures Out 15	641
User Defined Failures Out 16	642
User Defined Failures Out 17	642
User Defined Failures Out 18	643
User Defined Failures Out 19	643
User Defined Failures Out 2	643
User Defined Failures Out 20	644
User Defined Failures Out 21	644
User Defined Failures Out 22	645
User Defined Failures Out 23	645
User Defined Failures Out 24	645
User Defined Failures Out 25	646
User Defined Failures Out 26	646

User Defined Failures Out 3	647
User Defined Failures Out 4	647
User Defined Failures Out 5	647
User Defined Failures Out 6	648
User Defined Failures Out 7	648
User Defined Failures Out 8	649
User Defined Failures Out 9	649
17 System	650
System Stats	650
DSP Util Average	650
DSP Util Max	650
DSP Util Min	651
18 System (REST)	653
License Stats	653
License FEU Usage Average	653
License FEU Usage Max	654
License SBC Media Usage Average	654
License SBC Media Usage Max	655
License SBC Signaling Usage Average	655
License SBC Signaling Usage Max	656
License SIP Rec Usage Average	656
License SIP Rec Usage Max	657
License Transcoding Usage Average	657
License Transcoding Usage Max	658
License Web RTC Usage Average	658
License Web RTC Usage Max	659
Metering License Stats	659
Missed Sessions Duration	660
Missed SIP Rec Duration	660
Missed Transcoding Duration	661
Missed Web RTC Duration	661
Sessions Duration	662
SIP Rec Duration	663
Transcoding Duration	663
Web RTC Duration	664
System Stats	664
Memory Utilization Average	664
Memory Utilization Max	665
19 Trunk	666
Utilization	666
Trunk Utilization Average	666
Trunk Utilization Max	666
Trunk Utilization Min	667

20	Trunk (REST)	668
	Gateway Bri Stats	668
	Code Violation Seconds	668
	Code Violations	669
	Hdlc Crc Errors	669
	Lof Seconds	670
	Slip Seconds	670
	Slips	671
	Gateway DS 1 Stats	671
	Ais Alarms	672
	Bit Errors	672
	Bursty Errored Seconds	673
	Controlled Slip Seconds	673
	Controlled Slips	674
	Crc 4 Multiframe Errors	674
	Crc Errors	675
	Degraded Minutes	675
	Ebit Errors	676
	Errored Seconds	676
	Framing Errors	677
	Line Coding Violations	677
	Line Errored Seconds	678
	Lof Alarms	678
	Los Alarms	679
	Path Coding Violations	680
	Remote Alarms Received	680
	Severely Errored Framing Seconds	681
	Severely Errored Seconds	681
	Unavailable Seconds	682
	Gateway Trunk Stats	682
	Active Channels Average	683
	Active Channels Max	683
	Channels In Maintenance Average	684
	Channels In Maintenance Max	684
	Channels In Service Average	685
	Channels In Service Max	685
	Channels Not Equipped Average	686
	Channels Not Equipped Max	686
	Channels Out Of Service Average	687
	Channels Out Of Service Max	687
	Utilization Average	688
	Utilization Max	688
21	Trunk Group	689
	Call Failures	689

No Resources Calls	689
Call Stats	689
Call Duration (sec) Average	690
Call Duration (sec) Max	690
Call Duration (sec) Min	691
Trunk Stats	691
All Trunks Busy (%)	692
All Trunks Busy Time (sec)	692
Utilization (%) Average	693
Utilization (%) Max	693
Utilization (%) Min	694
Utilization (channels) Average	695
Utilization (channels) Max	695
Utilization (channels) Min	696
22 Trunk Group (REST)	697
Gateway Call Stats	697
Active Calls Average	698
Active Calls IP 2 Tel Average	699
Active Calls IP 2 Tel Max	699
Active Calls Max	700
Active Calls Tel 2 IP 2 Average	700
Active Calls Tel 2 IP Max	701
Answer Seizure Ratio Average	701
Attempted Calls IP 2 Tel	702
Attempted Calls Rate IP 2 Tel Average	702
Attempted Calls Rate IP 2 Tel Max	703
Attempted Calls Rate Tel 2 IP Average	703
Attempted Calls Rate Tel 2 IP Max	704
Attempted Calls Tel 2 IP	704
Attempted Fax IP 2 Tel	705
Attempted Fax Tel 2 IP	705
Average Call Duration Average	706
Established Calls IP 2 Tel	706
Established Calls Rate IP 2 Tel Average	707
Established Calls Rate IP 2 Tel Max	707
Established Calls Rate Tel 2 IP Average	708
Established Calls Rate Tel 2 IP Max	708
Established Calls Tel 2 IP	709
Established Fax IP 2 Tel	709
Established Fax Tel 2 IP	710
Failed Calls Busy IP 2 Tel	710
Failed Calls Busy Tel 2 IP	711
Failed Calls No Answer IP 2 Tel	711
Failed Calls No Answer Tel 2 IP	712

Failed Calls No Cap Match IP 2 Tel	712
Failed Calls No Cap Match Tel 2 IP	713
Failed Calls No Route IP 2 Tel	713
Failed Calls No Route Tel 2 IP	714
Failed Calls No Rsc IP 2 Tel	714
Failed Calls No Rsc Tel 2 IP	715
Failed Calls Other IP 2 Tel	715
Failed Calls Other Tel 2 IP	716
Forwarded Calls IP 2 Tel	716
Forwarded Calls Tel 2 IP	717
Gateway Trunk Stats	717
Active Channels Average	717
Active Channels Max	718
All Channels Busy Average	718
Utilization Average	719
Utilization Max	719


1 Introduction

This manual describes the performance monitoring parameters that can be configured in the OVOC Web interface. Performance Monitoring analysis is one of the tools that can be used by OVOC operators for network planning and administration in the OVOC topology. PM helps the system architect design a better network. PM helps operators discover malfunctioning devices before they start causing a problem on the production network. This monitoring involves the collection of high-level historic data polled from the managed entities (System, SBC, Gateway, IP Group, Trunk Group and SRD). Data files can be exported to an XML file, retrieved from the NBIF directory and then opened in third-party applications for analysis. Threshold monitors raise alarms when a threshold is exceeded and clear them when the PMs value falls below the defined low threshold value (see [Configuring Performance Monitoring Thresholds](#) on page 3 for more information).

The system provides two types of performance measurements:

- **Gauges:** Gauges represent the current state of a PM parameter in the system. Gauges, unlike counters, can decrease in value, and like counters, can increase. The gauges calculates the minimum, average and maximum values for each PM.
- **Counters:** Counters always increase in value and are cumulative. Counters, unlike gauges, never decrease in value unless the system is reset. The counters are then zeroed.

Performance measurements are managed through an SNMP or REST interface (this document is for managing Performance Monitors with an SNMP interface). These measurements are polled at 15 minute intervals. History PM Measurements supply statistical data of the PM entity during the last interval period as shown in the figure below.

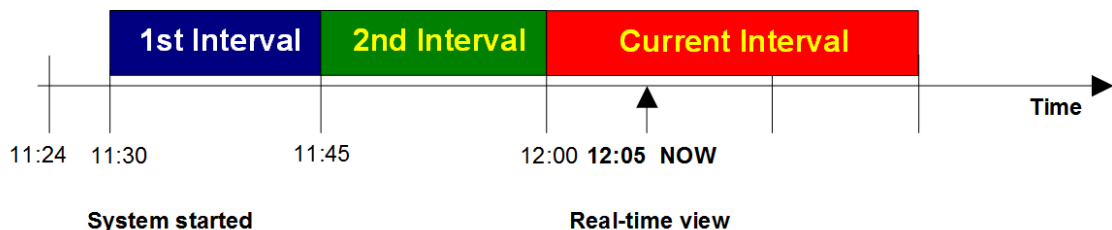

History Performance is measured in a constant time interval of 15 minutes to which all elements in the network are synchronized. Intervals commence precisely every 15 minutes, for example, 12:00:00, 12:15:00, 12:30:00, 12:45:00, etc. This allows synchronization of several management systems to the same interval time frame. Note that the first interval after start-up is always shorter (in the example above, the first interval only lasts 6 minutes - so that a new interval can start exactly on the 15 minute interval, in this case 11:30:00). During the initial start-up interval i.e. 6 minutes in the example above, polling is not performed.

The table below details each field included in the table descriptions for each Performance Monitoring parameter.

Table 1-1: Information Included in Each PM

Field	Value
Parameter Display Name	<p>Name of the Performance Monitor as it appears in the OVOC Web Performance Monitoring Profile and Performance Monitoring output files.</p> <p>For User defined Performance monitors, the following syntax is used:</p> <ul style="list-style-type: none"> ■ REST: User Defined Failures <Failure Type> <Rule Number_1-26> ■ SNMP: <Failure Type>User Defined Failures <Rule Number_1-26> <p>Where <Rule Number_1-26> indicates the rule ID for up to 26 user-defined Performance Monitoring (PM) SNMP MIB and REST rules for SBC calls.</p>
Description	<p>Explanation of the Performance Monitor functionality.</p> <p>Note: This field is only relevant for REST API supported parameters</p>
Type	Indicates whether the PM is a counter or gauge.
Aggregation Support	Indicates whether aggregation is supported for the PM; the PM is calculated across all managed objects. If aggregation is not supported then PMs are Stand-alone; PM is calculated for a single managed entity.
Version Support Start	From which version of the managed device the PM is supported
Version Support End	Until which version of the managed device the PM is supported (relevant for SNMP PMs only)
MIB Name	acPMSIPBusyCallsValIP2Tel (relevant for SNMP PMs only)
REST URL	The REST URL for the PM which is used with the OVOC REST API GET, PUT, POST and DELETE methods (refer to the REST API Developers Guide).
Supported Product Types	The supported OVOC product types



For further information on SNMP MIBs, refer to the SNMP Reference Guide for Gateways-SBCs-MSBRs.

2 Configuring Performance Monitoring Thresholds

Thresholds can be configured for Performance Monitoring parameters using the device INI file.



- PM thresholds cannot be configured using the OVOC Web interface nor are they displayed.
- The 15 minute polling interval cannot be changed.
- PM thresholds cannot be configured using REST API.

The SNMP trap event `acPerformanceMonitoringThresholdCrossing` is sent every time the threshold of a Performance Monitored object is crossed. The severity field is 'indeterminate' when the crossing is above the threshold and 'cleared' when it returns to below the threshold. The trap's 'source varbind' indicates the object for which the threshold is crossed. To enable this feature, load an ini file to the device with the following parameter setting:

```
PM_EnableThresholdAlarms = 1
```

Once enabled, you can also disable the sending of this trap per performance monitoring MIB, or change its default low and high threshold values. This can be done through SNMP or ini file. To configure this through ini file, use the following syntax:

```
PM_<MIB Source Name><_Index> = '<Enable or Disable>,<Low Threshold>,<High Threshold>,<Interval>'
```

where:

- <MIB Source Name> is the source name of the MIB, for example, `PM_TrunkUtilization`, `PM_NetUtilKBytes`, and `PM_gwSBCAttemptedCalls`.
- <_Index> is optional and is used to indicate the performance monitoring MIB index, for example, a specific Trunk. To indicate all indices, omit it.
- <Enable or Disable> enables (1) or disables (0) this feature for the specific performance monitoring MIB.
- <Low Threshold> is the low-threshold value.
- <High Threshold> is the high-threshold value.
- <Interval> is the measuring interval, which is always fixed at 15 minutes. Therefore, this value must always be configured as 15.

Below shows two ini file configuration examples for the `acPMSIPIPGroupOutInviteDialogsTable` performance monitoring MIB (OID 1.3.6.1.4.1.5003.10.8.2.52.35):

- The feature is enabled, the low threshold is 10 outgoing INVITE dialogs per IP Group, the high threshold is 18, and the interval length is 15 minutes:

```
PM_gwIPGroupOutINVITEDialogs = '1,10,18,15'
```

- The feature is disabled:

```
PM_gwIPGroupOutINVITEDialogs = '0,10,18,15'
```



In the above example, the corresponding MIB name for the PM_gwIPGroupOutINVITEDialogs source name is acPMSIIPGroupOutInviteDialogs. For determining the corresponding source name of the MIB whose threshold you wish to configure, refer to the SNMP Reference Guide for Gateways-SBCs-MSBRs.

If you download (save) the device's ini file, it includes all SNMP performance monitoring MIBs whose thresholds (low and/or high) you have changed from default. To apply these same threshold values to other devices, load the file to the other devices.

3 CPU (REST)

The following lists the CPU (REST) value-related performance monitoring groups

- System CPU Stats

System CPU Stats

The following lists the System CPU Stats-related performance monitoring elements

- CPU Utilization Average
- CPU Utilization Max

CPU Utilization Average

Field	Value
Parameter Name	CPU Utilization Average
Description	Average CPU utilization (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/cpuStats/cpu/cpuUtilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBC_GROUP; M600_GROUP; M1K_MSBC_GROUP; M3100_ESBC_GROUP

CPU Utilization Max

Field	Value
Parameter Name	CPU Utilization Max
Description	Maximum CPU utilization (%)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/cpuStats/cpu/cpuUtilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

4 Gateway

The following lists the Gateway value-related performance monitoring groups

- Call Stats
- Call Failures

Call Failures

The following lists the Call Failures-related performance monitoring elements

- IP to Tel Calls Terminated due to No Answer
- IP to Tel Calls Terminated due to a Busy Line
- IP to Tel Failed Calls due to No Matched Capabilities
- IP to Tel Failed Calls due to No Resources
- IP to Tel Failed Calls due to No Route
- IP to Tel Failed Calls due to Other Reasons
- Tel to IP Calls Terminated due to No Answer
- Tel to IP Calls Terminated due to a Busy Line
- Tel to IP Failed Calls due to No Matched Capabilities
- Tel to IP Failed Calls due to No Resources
- Tel to IP Failed Calls due to No Route
- Tel to IP Failed Calls due to Other Reasons

IP to Tel Calls Terminated due to a Busy Line

Field	Value
Parameter Name	IP to Tel Calls Terminated due to a Busy Line
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300

Field	Value
MIB Name	acPMSIPBusyCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

IP to Tel Calls Terminated due to No Answer

Field	Value
Parameter Name	IP to Tel Calls Terminated due to No Answer
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoAnswerCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

IP to Tel Failed Calls due to No Matched Capabilities

Field	Value
Parameter Name	IP to Tel Failed Calls due to No Matched Capabilities
Type	Counter
Aggregation	Yes

Field	Value
Support	
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoMatchCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

IP to Tel Failed Calls due to No Resources

Field	Value
Parameter Name	IP to Tel Failed Calls due to No Resources
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoResourcesCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

IP to Tel Failed Calls due to No Route

Field	Value
Parameter Name	IP to Tel Failed Calls due to No Route
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoRouteCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IP to Tel Failed Calls due to Other Reasons

Field	Value
Parameter Name	IP to Tel Failed Calls due to Other Reasons
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPFailCallsValIP2Tel
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Tel to IP Calls Terminated due to a Busy Line

Field	Value
Parameter Name	Tel to IP Calls Terminated due to a Busy Line
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPBusyCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Tel to IP Calls Terminated due to No Answer

Field	Value
Parameter Name	Tel to IP Calls Terminated due to No Answer
Type	Counter
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSIPNoAnswerCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tel to IP Failed Calls due to No Matched Capabilities

Field	Value
Parameter Name	Tel to IP Failed Calls due to No Matched Capabilities
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoMatchCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tel to IP Failed Calls due to No Resources

Field	Value
Parameter	Tel to IP Failed Calls due to No Resources

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoResourcesCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tel to IP Failed Calls due to No Route

Field	Value
Parameter Name	Tel to IP Failed Calls due to No Route
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPNoRouteCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Tel to IP Failed Calls due to Other Reasons

Field	Value
Parameter Name	Tel to IP Failed Calls due to Other Reasons
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPFailCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Call Stats

The following lists the Call Stats-related performance monitoring elements

- IP to Tel Call Attempts
- IP to Tel Call Duration [sec] Average
- IP to Tel Call Duration [sec] Max
- IP to Tel Call Duration [sec] Min
- IP to Tel Calls Terminated due to Forward
- IP to Tel Established Calls
- IP to Tel Fax Call Attempts
- IP to Tel Successful Fax Calls
- Tel to IP Fax Call Attempts

- Tel to IP Call Attempts
- Tel to IP Call Duration [sec] Average
- Tel to IP Call Duration [sec] Max
- Tel to IP Call Duration [sec] Min
- Tel to IP Calls Terminated due to Forward
- Tel to IP Established Calls
- Tel to IP Successful Fax Calls

IP to Tel Call Attempts

Field	Value
Parameter Name	IP to Tel Call Attempts
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSIPAttemptedCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

IP to Tel Call Duration [sec] Average

Field	Value
Parameter Name	IP to Tel Call Duration [sec] Average
Type	Gauge
Aggregation	Yes

Field	Value
Support	
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPCallDurationAverageIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

IP to Tel Call Duration [sec] Max

Field	Value
Parameter Name	IP to Tel Call Duration [sec] Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPCallDurationMaxIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

IP to Tel Call Duration [sec] Min

Field	Value
Parameter Name	IP to Tel Call Duration [sec] Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPCallDurationMinIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IP to Tel Calls Terminated due to Forward

Field	Value
Parameter Name	IP to Tel Calls Terminated due to Forward
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPForwardedCallsValIP2Tel
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

IP to Tel Established Calls

Field	Value
Parameter Name	IP to Tel Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPEstablishedCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

IP to Tel Fax Call Attempts

Field	Value
Parameter Name	IP to Tel Fax Call Attempts
Type	Counter
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSIPFaxAttemptedCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IP to Tel Successful Fax Calls

Field	Value
Parameter Name	IP to Tel Successful Fax Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPFaxSuccessCallsValIP2Tel
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tel to IP Fax Call Attempts

Field	Value
Parameter	Tel to IP Fax Call Attempts

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPFaxAttemptedCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tel to IP Call Attempts

Field	Value
Parameter Name	Tel to IP Call Attempts
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSIPAttemptedCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Tel to IP Call Duration [sec] Average

Field	Value
Parameter Name	Tel to IP Call Duration [sec] Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPCallDurationAverageTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Tel to IP Call Duration [sec] Max

Field	Value
Parameter Name	Tel to IP Call Duration [sec] Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSIPCallDurationMaxTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Tel to IP Call Duration [sec] Min

Field	Value
Parameter Name	Tel to IP Call Duration [sec] Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPCallDurationMinTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Tel to IP Calls Terminated due to Forward

Field	Value
Parameter Name	Tel to IP Calls Terminated due to Forward
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPForwardedCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Tel to IP Established Calls

Field	Value
Parameter Name	Tel to IP Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPEstablishedCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Tel to IP Successful Fax Calls

Field	Value
Parameter Name	Tel to IP Successful Fax Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPFaxSuccessCallsValTel2IP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

5 Gateway (REST)

The following lists the Gateway (REST) value-related performance monitoring groups

- Analog Stats
- Call Stats

Analog Stats

The following lists the Analog Stats-related performance monitoring elements

- Analog Active Lines Average
- Analog Active Lines Max

Analog Active Lines Average

Field	Value
Parameter Name	Analog Active Lines Average
Description	Average number of active (off-hook) analog lines
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/analogStats/global/analogActiveLinesAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Analog Active Lines Max

Field	Value
Parameter Name	Analog Active Lines Max
Description	Maximum number of active (off-hook) analog lines

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/analogStats/global/analogActiveLinesMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Call Stats

The following lists the Call Stats-related performance monitoring elements

- Active Calls Average
- Active Calls IP 2 Tel Average
- Active Calls IP 2 Tel Max
- Active Calls Max
- Active Calls Tel 2 IP Average
- Active Calls Tel 2 IP Max
- Answer Seizure Ratio Average
- Attempted Calls IP 2 Tel
- Attempted Calls Rate IP 2 Tel Average
- Attempted Calls Rate IP 2 Tel Max
- Attempted Calls Rate Tel 2 IP Average
- Attempted Calls Rate Tel 2 IP Max
- Attempted Calls Tel 2 IP
- Attempted Fax IP 2 Tel
- Attempted Fax Tel 2 IP
- Average Call Duration Average
- Established Calls IP 2 Tel
- Established Calls Rate IP 2 Tel Average
- Established Calls Rate IP 2 Tel Max

- Established Calls Rate Tel 2 IP Average
- Established Calls Rate Tel 2 IP Max
- Established Calls Tel 2 IP
- Established Fax IP 2 Tel
- Established Fax Tel 2 IP
- Failed Calls Busy IP 2 Tel
- Failed Calls Busy Tel 2 IP
- Failed Calls No Answer IP 2 Tel
- Failed Calls No Answer Tel 2 IP
- Failed Calls No Cap Match IP 2 Tel
- Failed Calls No Cap Match Tel 2 IP
- Failed Calls No Route IP 2 Tel
- Failed Calls No Route Tel 2 IP
- Failed Calls No Rsc IP 2 Tel
- Failed Calls No Rsc Tel 2 IP
- Failed Calls Other IP 2 Tel
- Failed Calls Other Tel 2 IP
- Forwarded Calls IP 2 Tel
- Forwarded Calls Tel 2 IP

Active Calls Average

Field	Value
Parameter Name	Active Calls Average
Description	Average number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/activeCallsAvg

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Average

Field	Value
Parameter Name	Active Calls IP 2 Tel Average
Description	Average number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/activeCallsIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Max

Field	Value
Parameter Name	Active Calls IP 2 Tel Max
Description	Maximum number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	gateway/callStats/global/activeCallsIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Max

Field	Value
Parameter Name	Active Calls Max
Description	Maximum number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/activeCallsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP Average

Field	Value
Parameter Name	Active Calls Tel 2 IP Average
Description	Average number of active Tel->IP calls
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	gateway/callStats/global/activeCallsTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP Max

Field	Value
Parameter Name	Active Calls Tel 2 IP Max
Description	Maximum number of active Tel->IP calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/activeCallsTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	gateway/callStats/global/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Attempted Calls IP 2 Tel

Field	Value
Parameter Name	Attempted Calls IP 2 Tel
Description	Number of attempted IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Attempted Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Average
Description	Average rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Max
Description	Maximum rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Average
Description	Average rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Max
Description	Maximum rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Tel 2 IP

Field	Value
Parameter Name	Attempted Calls Tel 2 IP
Description	Number of attempted Tel->IP calls

Field	Value
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax IP 2 Tel

Field	Value
Parameter Name	Attempted Fax IP 2 Tel
Description	Number of attempted IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax Tel 2 IP

Field	Value
Parameter Name	Attempted Fax Tel 2 IP

Field	Value
Description	Number of attempted Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/attemptedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls IP 2 Tel

Field	Value
Parameter	Established Calls IP 2 Tel

Field	Value
Name	
Description	Number of established IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Average
Description	Average rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Max
Description	Maximum rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Average
Description	Average rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Max
Description	Maximum rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Tel 2 IP

Field	Value
Parameter Name	Established Calls Tel 2 IP
Description	Number of established Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax IP 2 Tel

Field	Value
Parameter Name	Established Fax IP 2 Tel
Description	Number of established IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax Tel 2 IP

Field	Value
Parameter Name	Established Fax Tel 2 IP
Description	Number of established Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/establishedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy IP 2 Tel

Field	Value
Parameter Name	Failed Calls Busy IP 2 Tel
Description	Number of failed IP->Tel calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsBusyIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy Tel 2 IP

Field	Value
Parameter Name	Failed Calls Busy Tel 2 IP
Description	Number of failed Tel->IP Calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsBusyTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Answer IP 2 Tel
Description	Number of failed IP->Tel calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoAnswerIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Answer Tel 2 IP
Description	Number of failed Tel->IP calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoAnswerTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Cap Match IP 2 Tel
Description	Number of failed IP->Tel calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoCapMatchIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Cap Match Tel 2 IP
Description	Number of failed Tel->IP calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoCapMatchTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Route IP 2 Tel
Description	Number of failed IP->Tel calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoRouteIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Route Tel 2 IP
Description	Number of failed Tel->IP calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoRouteTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Rsc IP 2 Tel
Description	Number of failed IP->Tel calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoRscIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Rsc Tel 2 IP
Description	Number of failed Tel->IP calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsNoRscTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other IP 2 Tel

Field	Value
Parameter Name	Failed Calls Other IP 2 Tel
Description	Number of failed IP->Tel calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsOtherIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other Tel 2 IP

Field	Value
Parameter Name	Failed Calls Other Tel 2 IP
Description	Number of failed Tel->IP calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/failedCallsOtherTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls IP 2 Tel

Field	Value
Parameter Name	Forwarded Calls IP 2 Tel
Description	Number of forwarded IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/forwardedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls Tel 2 IP

Field	Value
Parameter Name	Forwarded Calls Tel 2 IP
Description	Number of forwarded Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/global/forwardedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

6 IP Group

The following lists the IP Group value-related performance monitoring groups

- Call Stats
- Other Stats
- Failure Stats

Call Stats

The following lists the Call Stats-related performance monitoring elements

- ACD Average
- ACD Max
- ACD Min
- ASR Average
- ASR Max
- ASR Min
- IN CAPS Average
- IN CAPS Max
- In Attempted Calls
- In Established Calls
- In Invite Dialogs Average
- In Invite Dialogs Max
- In Invite Dialogs Min
- In Short Calls
- Invite Dialogs Average
- Invite Dialogs Max
- Invite Dialogs Min
- Media Broken Connection Calls
- NER Average
- NER Max
- NER Min
- OUT CAPS Average
- OUT CAPS Max

- Out Attempted Calls
- Out Established Calls
- Out Invite Dialogs Average
- Out Invite Dialogs Max
- Out Invite Dialogs Min
- Out Short Calls

ACD Average

Field	Value
Parameter Name	ACD Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAcdAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ACD Max

Field	Value
Parameter Name	ACD Max
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAcdMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ACD Min

Field	Value
Parameter Name	ACD Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAcdMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Average

Field	Value
Parameter Name	ASR Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAsrAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Max

Field	Value
Parameter Name	ASR Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAsrMax
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

ASR Min

Field	Value
Parameter Name	ASR Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupAsrMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Attempted Calls

Field	Value
Parameter Name	In Attempted Calls
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IN CAPS Average

Field	Value
Parameter Name	IN CAPS Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IN CAPS Max

Field	Value
Parameter	IN CAPS Max

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Established Calls

Field	Value
Parameter Name	In Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In Invite Dialogs Average

Field	Value
Parameter Name	In Invite Dialogs Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInInviteDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In Invite Dialogs Max

Field	Value
Parameter Name	In Invite Dialogs Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSIPIPGroupInInviteDialogsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Invite Dialogs Min

Field	Value
Parameter Name	In Invite Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInInviteDialogsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Short Calls

Field	Value
Parameter Name	In Short Calls
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInShortCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Invite Dialogs Average

Field	Value
Parameter Name	Invite Dialogs Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInviteDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Invite Dialogs Max

Field	Value
Parameter Name	Invite Dialogs Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInviteDialogsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Invite Dialogs Min

Field	Value
Parameter Name	Invite Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInviteDialogsMin
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupMediaBrokenConnectionCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

NER Average

Field	Value
Parameter Name	NER Average
Type	Gauge
Aggregation Support	No
Version	7.2

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupNerAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Max

Field	Value
Parameter Name	NER Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupNerMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Min

Field	Value
Parameter	NER Min

Field	Value
Name	
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupNerMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Attempted Calls

Field	Value
Parameter Name	Out Attempted Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

OUT CAPS Average

Field	Value
Parameter Name	OUT CAPS Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

OUT CAPS Max

Field	Value
Parameter Name	OUT CAPS Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupOutCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Established Calls

Field	Value
Parameter Name	Out Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Invite Dialogs Average

Field	Value
Parameter Name	Out Invite Dialogs Average
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutInviteDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out Invite Dialogs Max

Field	Value
Parameter Name	Out Invite Dialogs Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutInviteDialogsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out Invite Dialogs Min

Field	Value
Parameter Name	Out Invite Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutInviteDialogsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Short Calls

Field	Value
Parameter Name	Out Short Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutShortCallsVal
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Failure Stats

The following lists the Failure Stats-related performance monitoring elements

- In User Defined Failures 1
- In User Defined Failures 10
- In User Defined Failures 11
- In User Defined Failures 12
- In User Defined Failures 13
- In User Defined Failures 14
- In User Defined Failures 15
- In User Defined Failures 16
- In User Defined Failures 17
- In User Defined Failures 18
- In User Defined Failures 19
- In User Defined Failures 2
- In User Defined Failures 20
- In User Defined Failures 21
- In User Defined Failures 22
- In User Defined Failures 23
- In User Defined Failures 24
- In User Defined Failures 25
- In User Defined Failures 26
- In User Defined Failures 3
- In User Defined Failures 4
- In User Defined Failures 5
- In User Defined Failures 6
- In User Defined Failures 7

- In User Defined Failures 8
- In User Defined Failures 9
- Out User Defined Failures 1
- Out User Defined Failures 10
- Out User Defined Failures 11
- Out User Defined Failures 12
- Out User Defined Failures 13
- Out User Defined Failures 14
- Out User Defined Failures 15
- Out User Defined Failures 16
- Out User Defined Failures 17
- Out User Defined Failures 18
- Out User Defined Failures 19
- Out User Defined Failures 2
- Out User Defined Failures 20
- Out User Defined Failures 21
- Out User Defined Failures 22
- Out User Defined Failures 23
- Out User Defined Failures 24
- Out User Defined Failures 25
- Out User Defined Failures 26
- Out User Defined Failures 3
- Out User Defined Failures 4
- Out User Defined Failures 5
- Out User Defined Failures 6
- Out User Defined Failures 7
- Out User Defined Failures 8
- Out User Defined Failures 9

In User Defined Failures 1

Field	Value
Parameter Name	In User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 10

Field	Value
Parameter Name	In User Defined Failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures10Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 11

Field	Value
Parameter Name	In User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 12

Field	Value
Parameter Name	In User Defined Failures 12
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 13

Field	Value
Parameter Name	In User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures13Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 14

Field	Value
Parameter	In User Defined Failures 14

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 15

Field	Value
Parameter Name	In User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures15Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 16

Field	Value
Parameter Name	In User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 17

Field	Value
Parameter Name	In User Defined Failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupInUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 18

Field	Value
Parameter Name	In User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 19

Field	Value
Parameter Name	In User Defined Failures 19
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 2

Field	Value
Parameter Name	In User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures2Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 20

Field	Value
Parameter Name	In User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 21

Field	Value
Parameter Name	In User Defined Failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures21Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 22

Field	Value
Parameter Name	In User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 23

Field	Value
Parameter Name	In User Defined Failures 23
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 24

Field	Value
Parameter Name	In User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures24Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 25

Field	Value
Parameter	In User Defined Failures 25

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 26

Field	Value
Parameter Name	In User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures26Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 3

Field	Value
Parameter Name	In User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 4

Field	Value
Parameter Name	In User Defined Failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupInUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 5

Field	Value
Parameter Name	In User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 6

Field	Value
Parameter Name	In User Defined Failures 6
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 7

Field	Value
Parameter Name	In User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures7Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 8

Field	Value
Parameter Name	In User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 9

Field	Value
Parameter Name	In User Defined Failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInUserDefinedFailures9Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 1

Field	Value
Parameter Name	Out User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBICIPGroupOutUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 10

Field	Value
Parameter Name	Out User Defined Failures 10
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures10Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 11

Field	Value
Parameter Name	Out User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 12

Field	Value
Parameter	Out User Defined Failures 12

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 13

Field	Value
Parameter Name	Out User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures13Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 14

Field	Value
Parameter Name	Out User Defined Failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 15

Field	Value
Parameter Name	Out User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupOutUserDefinedFailures15Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 16

Field	Value
Parameter Name	Out User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 17

Field	Value
Parameter Name	Out User Defined Failures 17
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 18

Field	Value
Parameter Name	Out User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 19

Field	Value
Parameter Name	Out User Defined Failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 2

Field	Value
Parameter Name	Out User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures2Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 20

Field	Value
Parameter Name	Out User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBICIPGroupOutUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 21

Field	Value
Parameter Name	Out User Defined Failures 21
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures21Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 22

Field	Value
Parameter Name	Out User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 23

Field	Value
Parameter	Out User Defined Failures 23

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 24

Field	Value
Parameter Name	Out User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures24Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 25

Field	Value
Parameter Name	Out User Defined Failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 26

Field	Value
Parameter Name	Out User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupOutUserDefinedFailures26Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 3

Field	Value
Parameter Name	Out User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 4

Field	Value
Parameter Name	Out User Defined Failures 4
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 5

Field	Value
Parameter Name	Out User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 6

Field	Value
Parameter Name	Out User Defined Failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 7

Field	Value
Parameter Name	Out User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures7Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBBG_GROUP; SW_SBBG_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 8

Field	Value
Parameter Name	Out User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBICIPGroupOutUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBBG_GROUP; SW_SBBG_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 9

Field	Value
Parameter Name	Out User Defined Failures 9
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutUserDefinedFailures9Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Other Stats

The following lists the Other Stats-related performance monitoring elements

- Dialogs
- In Attempted Registrations
- In Subscribe Dialogs Average
- In Subscribe Dialogs Max
- In Subscribe Dialogs Min
- In Successful Registrations
- Out Attempted Registrations
- Out Subscribe Dialogs Average
- Out Subscribe Dialogs Max
- Out Subscribe Dialogs Min
- Out Successful Registrations
- Subscribe Dialogs Average
- Subscribe Dialogs Max
- Subscribe Dialogs Min

Dialogs

Field	Value
Parameter Name	Dialogs

Field	Value
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupDialogsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Attempted Registrations

Field	Value
Parameter Name	In Attempted Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Subscribe Dialogs Average

Field	Value
Parameter Name	In Subscribe Dialogs Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInSubscribeDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Subscribe Dialogs Max

Field	Value
Parameter Name	In Subscribe Dialogs Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInSubscribeDialogsMax
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In Subscribe Dialogs Min

Field	Value
Parameter Name	In Subscribe Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupInSubscribeDialogsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In Successful Registrations

Field	Value
Parameter Name	In Successful Registrations
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupInSuccessfulRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Attempted Registrations

Field	Value
Parameter Name	Out Attempted Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCIPGroupOutAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Subscribe Dialogs Average

Field	Value
Parameter	Out Subscribe Dialogs Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutSubscribeDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Subscribe Dialogs Max

Field	Value
Parameter Name	Out Subscribe Dialogs Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutSubscribeDialogsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out Subscribe Dialogs Min

Field	Value
Parameter Name	Out Subscribe Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupOutSubscribeDialogsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out Successful Registrations

Field	Value
Parameter Name	Out Successful Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCIPGroupOutSuccessfulRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Subscribe Dialogs Average

Field	Value
Parameter Name	Subscribe Dialogs Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupSubscribeDialogsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Subscribe Dialogs Max

Field	Value
Parameter Name	Subscribe Dialogs Max
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupSubscribeDialogsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Subscribe Dialogs Min

Field	Value
Parameter Name	Subscribe Dialogs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPIPGroupSubscribeDialogsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

7 IP Group (REST)

The following lists the IP Group (REST) value-related performance monitoring groups

- Gateway Call Stats
- Media Coder Stats
- Media Media Stats
- SBC Call Stats
- SBC Other Stats
- SBC SIP Rec Stats
- SBC User Defined

Gateway Call Stats

The following lists the Gateway Call Stats-related performance monitoring elements

- Active Calls Average
- Active Calls IP 2 Tel Average
- Active Calls IP 2 Tel Max
- Active Calls Max
- Active Calls Tel 2 IP Average
- Active Calls Tel 2 IP Max
- Answer Seizure Ratio Average
- Attempted Calls IP 2 Tel
- Attempted Calls Rate IP 2 Tel Average
- Attempted Calls Rate IP 2 Tel Max
- Attempted Calls Rate Tel 2 IP Average
- Attempted Calls Rate Tel 2 IP Max
- Attempted Calls Tel 2 IP
- Attempted Fax IP 2 Tel
- Attempted Fax Tel 2 IP
- Average Call Duration Average
- Established Calls IP 2 Tel
- Established Calls Rate IP 2 Tel Average
- Established Calls Rate IP 2 Tel Max

- Established Calls Rate Tel 2 IP Average
- Established Calls Rate Tel 2 IP Max
- Established Calls Tel 2 IP
- Established Fax IP 2 Tel
- Established Fax Tel 2 IP
- Failed Calls Busy IP 2 Tel
- Failed Calls Busy Tel 2 IP
- Failed Calls No Answer IP 2 Tel
- Failed Calls No Answer Tel 2 IP
- Failed Calls No Cap Match IP 2 Tel
- Failed Calls No Cap Match Tel 2 IP
- Failed Calls No Route IP 2 Tel
- Failed Calls No Route Tel 2 IP
- Failed Calls No Rsc IP 2 Tel
- Failed Calls No Rsc Tel 2 IP
- Failed Calls Other IP 2 Tel
- Failed Calls Other Tel 2 IP
- Forwarded Calls IP 2 Tel
- Forwarded Calls Tel 2 IP

Active Calls Average

Field	Value
Parameter Name	Active Calls Average
Description	Average number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/activeCallsAvg

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Average

Field	Value
Parameter Name	Active Calls IP 2 Tel Average
Description	Average number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/activeCallsIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Max

Field	Value
Parameter Name	Active Calls IP 2 Tel Max
Description	Maximum number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	gateway/callStats/ipGroup/activeCallsIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Max

Field	Value
Parameter Name	Active Calls Max
Description	Maximum number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/activeCallsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP Average

Field	Value
Parameter Name	Active Calls Tel 2 IP Average
Description	Average number of active Tel->IP calls
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	gateway/callStats/ipGroup/activeCallsTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP Max

Field	Value
Parameter Name	Active Calls Tel 2 IP Max
Description	Maximum number of active Tel->IP calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/activeCallsTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Attempted Calls IP 2 Tel

Field	Value
Parameter Name	Attempted Calls IP 2 Tel
Description	Number of attempted IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Attempted Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Average
Description	Average rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Max
Description	Maximum rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Average
Description	Average rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Max
Description	Maximum rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Tel 2 IP

Field	Value
Parameter Name	Attempted Calls Tel 2 IP
Description	Number of attempted Tel->IP calls

Field	Value
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax IP 2 Tel

Field	Value
Parameter Name	Attempted Fax IP 2 Tel
Description	Number of attempted IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax Tel 2 IP

Field	Value
Parameter Name	Attempted Fax Tel 2 IP

Field	Value
Description	Number of attempted Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/attemptedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls IP 2 Tel

Field	Value
Parameter	Established Calls IP 2 Tel

Field	Value
Name	
Description	Number of established IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Average
Description	Average rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Max
Description	Maximum rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Average
Description	Average rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Max
Description	Maximum rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Tel 2 IP

Field	Value
Parameter Name	Established Calls Tel 2 IP
Description	Number of established Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax IP 2 Tel

Field	Value
Parameter Name	Established Fax IP 2 Tel
Description	Number of established IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax Tel 2 IP

Field	Value
Parameter Name	Established Fax Tel 2 IP
Description	Number of established Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/establishedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy IP 2 Tel

Field	Value
Parameter Name	Failed Calls Busy IP 2 Tel
Description	Number of failed IP->Tel calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsBusyIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy Tel 2 IP

Field	Value
Parameter Name	Failed Calls Busy Tel 2 IP
Description	Number of failed Tel->IP Calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsBusyTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Answer IP 2 Tel
Description	Number of failed IP->Tel calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoAnswerIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Answer Tel 2 IP
Description	Number of failed Tel->IP calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoAnswerTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Cap Match IP 2 Tel
Description	Number of failed IP->Tel calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoCapMatchIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Cap Match Tel 2 IP
Description	Number of failed Tel->IP calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoCapMatchTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Route IP 2 Tel
Description	Number of failed IP->Tel calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoRouteIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Route Tel 2 IP
Description	Number of failed Tel->IP calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoRouteTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Rsc IP 2 Tel
Description	Number of failed IP->Tel calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoRscIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Rsc Tel 2 IP
Description	Number of failed Tel->IP calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsNoRscTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other IP 2 Tel

Field	Value
Parameter Name	Failed Calls Other IP 2 Tel
Description	Number of failed IP->Tel calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsOtherIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other Tel 2 IP

Field	Value
Parameter Name	Failed Calls Other Tel 2 IP
Description	Number of failed Tel->IP calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/failedCallsOtherTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls IP 2 Tel

Field	Value
Parameter Name	Forwarded Calls IP 2 Tel
Description	Number of forwarded IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/forwardedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls Tel 2 IP

Field	Value
Parameter Name	Forwarded Calls Tel 2 IP
Description	Number of forwarded Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/ipGroup/forwardedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Coder Stats

The following lists the Media Coder Stats-related performance monitoring elements

- Coder AMRNB Average
- Coder AMRNB Max
- Coder AMRWB Average
- Coder AMRWB Max
- Coder EVRC Average
- Coder EVRC Max
- Coder G 711 Average
- Coder G 711 Max
- Coder G 711 alaw Average
- Coder G 711 alaw Max
- Coder G 711 ulaw Average
- Coder G 711 ulaw Max
- Coder G 722 Average
- Coder G 722 Max
- Coder G 723 Average
- Coder G 723 Max
- Coder G 726 Average
- Coder G 726 Max
- Coder G 729 Average
- Coder G 729 EV Average
- Coder G 729 EV Max
- Coder G 729 Max
- Coder GSMEFR Average
- Coder GSMEFR Max
- Coder GSMFR Average
- Coder GSMFR Max
- Coder ILBC Average
- Coder ILBC Max
- Coder OPUSNB Average
- Coder OPUSNB Max

- Coder OPUSWB Average
- Coder OPUSWB Max
- Coder Other Average
- Coder Other Max
- Coder QCELP Average
- Coder QCELP Max
- Coder RTA Average
- Coder RTA Max
- Coder SILKNB Average
- Coder SILKNB Max
- Coder SILKWB Average
- Coder SILKWB Max
- Coder T 38 Average
- Coder T 38 Max

Coder AMRNB Average

Field	Value
Parameter Name	Coder AMRNB Average
Description	Average number of active channels with AMR-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderAMRNBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRNB Max

Field	Value
Parameter Name	Coder AMRNB Max
Description	Maximum number of active channels with AMR-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderAMRNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRWB Average

Field	Value
Parameter Name	Coder AMRWB Average
Description	Average number of active channels with AMR-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderAMRWB Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRWB Max

Field	Value
Parameter Name	Coder AMRWB Max
Description	Maximum number of active channels with AMR-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderAMRWBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder EVRC Average

Field	Value
Parameter Name	Coder EVRC Average
Description	Average number of active channels with EVRC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderEVRCAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder EVRC Max

Field	Value
Parameter Name	Coder EVRC Max
Description	Maximum number of active channels with EVRC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderEVRCMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 alaw Average

Field	Value
Parameter Name	Coder G 711 alaw Average
Description	Average number of active channels with G.711alaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711alawAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 alaw Max

Field	Value
Parameter Name	Coder G 711 alaw Max
Description	Maximum number of active channels with G.711alaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711alawMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 Average

Field	Value
Parameter Name	Coder G 711 Average
Description	Number of active channels with G.711 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 Max

Field	Value
Parameter Name	Coder G 711 Max
Description	Maximum number of active channels with G.711 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 ulaw Average

Field	Value
Parameter Name	Coder G 711 ulaw Average
Description	Average number of active channels with G.711ulaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711ulawAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 ulaw Max

Field	Value
Parameter Name	Coder G 711 ulaw Max
Description	Maximum number of active channels with G.711ulaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG711ulawMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 722 Average

Field	Value
Parameter Name	Coder G 722 Average
Description	Average number of active channels with G.722 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG722Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 722 Max

Field	Value
Parameter Name	Coder G 722 Max
Description	Maximum number of active channels with G.722 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG722Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 723 Average

Field	Value
Parameter Name	Coder G 723 Average
Description	Average number of active channels with G.723 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG723Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 723 Max

Field	Value
Parameter Name	Coder G 723 Max
Description	Maximum number of active channels with G.723 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG723Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 726 Average

Field	Value
Parameter Name	Coder G 726 Average
Description	Average number of active channels with G.726 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG726Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 726 Max

Field	Value
Parameter Name	Coder G 726 Max
Description	Maximum number of active channels with G.726 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG726Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 Average

Field	Value
Parameter Name	Coder G 729 Average
Description	Average number of active channels with G.729 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG729Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 EV Average

Field	Value
Parameter Name	Coder G 729 EV Average
Description	Average number of active channels with G.729EV coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG729EVAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 EV Max

Field	Value
Parameter Name	Coder G 729 EV Max
Description	Maximum number of active channels with G.729EV coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG729EVMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 Max

Field	Value
Parameter Name	Coder G 729 Max
Description	Maximum number of active channels with G.729 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderG729Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMEFR Average

Field	Value
Parameter Name	Coder GSMEFR Average
Description	Average number of active channels with GSM-EFR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderGSMEFRAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMEFR Max

Field	Value
Parameter Name	Coder GSMEFR Max
Description	Maximum number of active channels with GSM-EFR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderGSMEFRMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMFR Average

Field	Value
Parameter Name	Coder GSMFR Average
Description	Average number of active channels with GSM-FR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderGSMFRAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMFR Max

Field	Value
Parameter Name	Coder GSMFR Max
Description	Maximum number of active channels with GSM-FR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderGSMFRMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder ILBC Average

Field	Value
Parameter Name	Coder ILBC Average
Description	Average number of active channels with iLBC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderILBCAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder ILBC Max

Field	Value
Parameter Name	Coder ILBC Max
Description	Maximum number of active channels with iLBC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderILBCMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Coder OPUSNB Average

Field	Value
Parameter Name	Coder OPUSNB Average
Description	Average number of active channels with OPUS-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOPUSNB Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Coder OPUSNB Max

Field	Value
Parameter Name	Coder OPUSNB Max
Description	Maximum number of active channels with OPUS-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOPUSNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSWB Average

Field	Value
Parameter Name	Coder OPUSWB Average
Description	Average number of active channels with OPUS-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOPUSWBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSWB Max

Field	Value
Parameter Name	Coder OPUSWB Max
Description	Maximum number of active channels with OPUS-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOPUSWBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder Other Average

Field	Value
Parameter Name	Coder Other Average
Description	Average number of active channels with other coders
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOtherAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder Other Max

Field	Value
Parameter Name	Coder Other Max
Description	Maximum number of active channels with other coders
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderOtherMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder QCELP Average

Field	Value
Parameter Name	Coder QCELP Average
Description	Average number of active channels with QCELP coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderQCELPAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder QCELP Max

Field	Value
Parameter Name	Coder QCELP Max
Description	Maximum number of active channels with QCELP coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderQCELPMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder RTA Average

Field	Value
Parameter Name	Coder RTA Average
Description	Average number of active channels with RTA coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderRTAAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder RTA Max

Field	Value
Parameter Name	Coder RTA Max
Description	Maximum number of active channels with RTA coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderRTAMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKNB Average

Field	Value
Parameter Name	Coder SILKNB Average
Description	Average number of active channels with SILK-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderSILKNBavg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKNB Max

Field	Value
Parameter Name	Coder SILKNB Max
Description	Maximum number of active channels with SILK-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderSILKNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKWB Average

Field	Value
Parameter Name	Coder SILKWB Average
Description	Average number of active channels with SILK-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderSILKWBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKWB Max

Field	Value
Parameter Name	Coder SILKWB Max
Description	Maximum number of active channels with SILK-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderSILKWbMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder T 38 Average

Field	Value
Parameter Name	Coder T 38 Average
Description	Average number of active channels with T.38 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderT38Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder T 38 Max

Field	Value
Parameter Name	Coder T 38 Max
Description	Maximum number of active channels with T.38 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/ipGroup/coderT38Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Media Stats

The following lists the Media Media Stats-related performance monitoring elements

- Media Bandwidth In Average
- Media Bandwidth Out Average
- Media Delay In Average
- Media Delay In Max
- Media Delay In Min
- Media Delay Out Average
- Media Delay Out Max
- Media Delay Out Min
- Media Jitter In Average
- Media Jitter In Max
- Media Jitter In Min
- Media Jitter Out Average
- Media Jitter Out Max
- Media Jitter Out Min

- Media K Bytes In
- Media K Bytes Out
- Media MOS In Average
- Media MOS In Max
- Media MOS In Min
- Media MOS Out Average
- Media MOS Out Max
- Media MOS Out Min
- Media Packet Loss In Average
- Media Packet Loss In Max
- Media Packet Loss In Min
- Media Packet Loss Out Average
- Media Packet Loss Out Max
- Media Packet Loss Out Min
- Media Packets In
- Media Packets Out
- Media Quality In Max
- Media Quality In Min
- Media Quality Out Max
- Media Quality Out Min
- Media RTP Streams Average
- Media RTP Streams Max
- Media SIP Rec Streams Average
- Media SIP Rec Streams Max
- Media SRTP Streams Average
- Media SRTP Streams Max
- Media Streams Average
- Media Streams Max
- Media Web RTC Streams Average
- Media Web RTC Streams Max

Media Bandwidth In Average

Field	Value
Parameter Name	Media Bandwidth In Average
Description	Average inbound media bandwidth (Kbits per sec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaBandwidthInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Bandwidth Out Average

Field	Value
Parameter Name	Media Bandwidth Out Average
Description	Average outbound media bandwidth (Kbits per sec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaBandwidthOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Average

Field	Value
Parameter Name	Media Delay In Average
Description	Average inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Max

Field	Value
Parameter Name	Media Delay In Max
Description	Maximum inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Min

Field	Value
Parameter Name	Media Delay In Min
Description	Minimum inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay Out Average

Field	Value
Parameter Name	Media Delay Out Average
Description	Average outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay Out Max

Field	Value
Parameter Name	Media Delay Out Max
Description	Maximum outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay Out Min

Field	Value
Parameter Name	Media Delay Out Min
Description	Minimum outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaDelayOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Average

Field	Value
Parameter Name	Media Jitter In Average
Description	Average inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Max

Field	Value
Parameter Name	Media Jitter In Max
Description	Maximum inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Min

Field	Value
Parameter Name	Media Jitter In Min
Description	Minimum inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Average

Field	Value
Parameter Name	Media Jitter Out Average
Description	Average outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Max

Field	Value
Parameter Name	Media Jitter Out Max
Description	Maximum outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Min

Field	Value
Parameter Name	Media Jitter Out Min
Description	Minimum outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaJitterOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes In

Field	Value
Parameter Name	Media K Bytes In
Description	Amount of inbound media traffic (KBytes)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaKBytesIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes Out

Field	Value
Parameter Name	Media K Bytes Out
Description	Amount of outbound media traffic (KBytes)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaKBytesOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Average

Field	Value
Parameter Name	Media MOS In Average
Description	Average inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Max

Field	Value
Parameter Name	Media MOS In Max
Description	Maximum inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Min

Field	Value
Parameter Name	Media MOS In Min
Description	Minimum inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Average

Field	Value
Parameter Name	Media MOS Out Average
Description	Average outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Max

Field	Value
Parameter Name	Media MOS Out Max
Description	Maximum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Min

Field	Value
Parameter Name	Media MOS Out Min
Description	Minimum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaMOSOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Average

Field	Value
Parameter Name	Media Packet Loss In Average
Description	Average inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Max

Field	Value
Parameter Name	Media Packet Loss In Max
Description	Maximum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Min

Field	Value
Parameter Name	Media Packet Loss In Min
Description	Minimum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Average

Field	Value
Parameter Name	Media Packet Loss Out Average
Description	Average outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Max

Field	Value
Parameter Name	Media Packet Loss Out Max
Description	Maximum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Min

Field	Value
Parameter Name	Media Packet Loss Out Min
Description	Minimum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketLossOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets In

Field	Value
Parameter Name	Media Packets In
Description	Number of received media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets Out

Field	Value
Parameter Name	Media Packets Out
Description	Number of transmitted media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaPacketsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality In Max

Field	Value
Parameter Name	Media Quality In Max
Description	Maximum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaQualityInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality In Min

Field	Value
Parameter Name	Media Quality In Min
Description	Minimum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaQualityInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality Out Max

Field	Value
Parameter Name	Media Quality Out Max
Description	Maximum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaQualityOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality Out Min

Field	Value
Parameter Name	Media Quality Out Min
Description	Minimum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaQualityOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media RTP Streams Average

Field	Value
Parameter Name	Media RTP Streams Average
Description	Average number of media RTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaRtpStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media RTP Streams Max

Field	Value
Parameter Name	Media RTP Streams Max
Description	Maximum number of media RTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaRtpStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SIP Rec Streams Average

Field	Value
Parameter Name	Media SIP Rec Streams Average
Description	Average number of media SIP-REC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaSipRecStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SIP Rec Streams Max

Field	Value
Parameter Name	Media SIP Rec Streams Max
Description	Maximum number of media SIP-REC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaSipRecStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SRTP Streams Average

Field	Value
Parameter Name	Media SRTP Streams Average
Description	Average number of media SRTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaSrtpStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SRTP Streams Max

Field	Value
Parameter Name	Media SRTP Streams Max
Description	Maximum number of media SRTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaSrtpStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Streams Average

Field	Value
Parameter Name	Media Streams Average
Description	Average number of media streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Streams Max

Field	Value
Parameter Name	Media Streams Max
Description	Maximum number of media streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/ipGroup/mediaStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Web RTC Streams Average

Field	Value
Parameter Name	Media Web RTC Streams Average
Description	Average number of media WebRTC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/mediaStats/ipGroup/mediaWebRTCStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Web RTC Streams Max

Field	Value
Parameter Name	Media Web RTC Streams Max
Description	Maximum number of media WebRTC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/mediaStats/ipGroup/mediaWebRTCStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC Call Stats

The following lists the SBC Call Stats-related performance monitoring elements

- Abnormal Terminated Calls In
- Abnormal Terminated Calls Out
- Active Calls In Average
- Active Calls In Max
- Active Calls Out Average
- Active Calls Out Max
- Admission Failed Calls In
- Admission Failed Calls Out
- Answer Seizure Ratio Average
- Attempted Calls In
- Attempted Calls Out
- Attempted Calls Rate In Average
- Attempted Calls Rate In Max
- Attempted Calls Rate Out Average
- Attempted Calls Rate Out Max
- Average Call Duration Average
- Busy Calls In
- Busy Calls Out
- Established Calls In
- Established Calls Out
- Established Calls Rate In Average
- Established Calls Rate In Max
- Established Calls Rate Out Average
- Established Calls Rate Out Max
- Forwarded Calls In
- Forwarded Calls Out
- Long Calls Counter
- Media Broken Connection Calls
- Media Mismatch Calls In
- Media Mismatch Calls Out

- Minutes Of Usage
- Network Effectiveness Ratio Average
- No Answer Calls In
- No Answer Calls Out
- No Resources Calls In
- No Resources Calls Out
- No Route Calls In
- Not Establish Calls In
- Not Establish Calls Out
- Not Establish Failed Calls In
- Not Establish Failed Calls Out
- Not Establish Success Calls In
- Not Establish Success Calls Out
- Other Reason Calls In
- Other Reason Calls Out
- Post Dial Delay Average
- Post Dial Delay Max
- Post Dial Delay Min
- Short Calls Counter

Abnormal Terminated Calls In

Field	Value
Parameter Name	Abnormal Terminated Calls In
Description	Number of abnormally terminated inbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/abnormalTerminatedCallsIn

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Abnormal Terminated Calls Out

Field	Value
Parameter Name	Abnormal Terminated Calls Out
Description	Number of abnormally terminated outbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcs/callStats/ipGroup/abnormalTerminatedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Active Calls In Average

Field	Value
Parameter Name	Active Calls In Average
Description	Average number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	sbc/callStats/ipGroup/activeCallsInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls In Max

Field	Value
Parameter Name	Active Calls In Max
Description	Maximum number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/activeCallsInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls Out Average

Field	Value
Parameter Name	Active Calls Out Average
Description	Average number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	sbc/callStats/ipGroup/activeCallsOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls Out Max

Field	Value
Parameter Name	Active Calls Out Max
Description	Maximum number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/activeCallsOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Admission Failed Calls In

Field	Value
Parameter Name	Admission Failed Calls In
Description	Number of inbound calls closed due to admission control (CAC)
Type	Counter
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/admissionFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Admission Failed Calls Out

Field	Value
Parameter Name	Admission Failed Calls Out
Description	Number of outbound calls closed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/admissionFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Attempted Calls In

Field	Value
Parameter Name	Attempted Calls In
Description	Number of attempted inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Out

Field	Value
Parameter Name	Attempted Calls Out
Description	Number of attempted outbound calls (INVITE dialogs)
Type	Counter

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Average

Field	Value
Parameter Name	Attempted Calls Rate In Average
Description	Average rate of attempted inbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Max

Field	Value
Parameter Name	Attempted Calls Rate In Max
Description	Maximum rate of attempted inbound calls (call attempts per second)

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Average

Field	Value
Parameter Name	Attempted Calls Rate Out Average
Description	Average rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Max

Field	Value
Parameter Name	Attempted Calls Rate Out Max

Field	Value
Description	Maximum rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/attemptedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Busy Calls In

Field	Value
Parameter	Busy Calls In

Field	Value
Name	
Description	Number of inbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/busyCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Busy Calls Out

Field	Value
Parameter Name	Busy Calls Out
Description	Number of outbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/busyCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls In

Field	Value
Parameter Name	Established Calls In
Description	Number of established inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls Out

Field	Value
Parameter Name	Established Calls Out
Description	Number of established outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Average

Field	Value
Parameter Name	Established Calls Rate In Average
Description	Average rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Max

Field	Value
Parameter Name	Established Calls Rate In Max
Description	Maximum rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Average

Field	Value
Parameter Name	Established Calls Rate Out Average
Description	Average rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Max

Field	Value
Parameter Name	Established Calls Rate Out Max
Description	Maximum rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/establishedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls In

Field	Value
Parameter Name	Forwarded Calls In
Description	Number of forwarded inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/forwardedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Forwarded Calls Out

Field	Value
Parameter Name	Forwarded Calls Out
Description	Number of forwarded outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/forwardedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Long Calls Counter

Field	Value
Parameter Name	Long Calls Counter
Description	Number of calls with duration longer than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/longCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Description	Number of calls that failed due to broken connection
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/mediaBrokenConnectionCalls
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls In

Field	Value
Parameter Name	Media Mismatch Calls In
Description	Number of inbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/mediaMismatchCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls Out

Field	Value
Parameter Name	Media Mismatch Calls Out
Description	Number of outbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/mediaMismatchCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Minutes Of Usage

Field	Value
Parameter Name	Minutes Of Usage
Description	Sum in minutes of call duration
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/minutesOfUsage
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Network Effectiveness Ratio Average

Field	Value
Parameter Name	Network Effectiveness Ratio Average
Description	Average network effectiveness ratio (NER, %)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/networkEffectivenessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Answer Calls In

Field	Value
Parameter Name	No Answer Calls In
Description	Number of inbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/noAnswerCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Answer Calls Out

Field	Value
Parameter Name	No Answer Calls Out
Description	Number of outbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/noAnswerCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Resources Calls In

Field	Value
Parameter Name	No Resources Calls In
Description	Number of inbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/noResourcesCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Resources Calls Out

Field	Value
Parameter Name	No Resources Calls Out
Description	Number of outbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/noResourcesCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Route Calls In

Field	Value
Parameter Name	No Route Calls In
Description	Number of inbound calls closed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/noRouteCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Calls In

Field	Value
Parameter Name	Not Establish Calls In
Description	Number of not established inbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/ipGroup/notEstablishCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Calls Out

Field	Value
Parameter Name	Not Establish Calls Out
Description	Number of not established outbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/ipGroup/notEstablishCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls In

Field	Value
Parameter Name	Not Establish Failed Calls In
Description	Number of not established inbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/notEstablishFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls Out

Field	Value
Parameter Name	Not Establish Failed Calls Out
Description	Number of not established outbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/notEstablishFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls In

Field	Value
Parameter Name	Not Establish Success Calls In
Description	Number of not established inbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/notEstablishSuccessCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls Out

Field	Value
Parameter Name	Not Establish Success Calls Out
Description	Number of not established outbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/notEstablishSuccessCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Reason Calls In

Field	Value
Parameter Name	Other Reason Calls In
Description	Number of inbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/otherReasonCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Reason Calls Out

Field	Value
Parameter Name	Other Reason Calls Out
Description	Number of outbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/otherReasonCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Post Dial Delay Average

Field	Value
Parameter Name	Post Dial Delay Average
Description	Average number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/postDialDelayAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Post Dial Delay Max

Field	Value
Parameter Name	Post Dial Delay Max
Description	Maximum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/postDialDelayMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Post Dial Delay Min

Field	Value
Parameter Name	Post Dial Delay Min
Description	Minimum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/postDialDelayMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Short Calls Counter

Field	Value
Parameter Name	Short Calls Counter
Description	Number of calls with duration shorter than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/ipGroup/shortCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Other Stats

The following lists the SBC Other Stats-related performance monitoring elements

- Active Subscribes Average
- Active Subscribes Max
- Failed Other Dialogs In
- Failed Other Dialogs Out
- Failed Register Admission In
- Failed Register Admission Out
- Failed Register In
- Failed Register No Route In
- Failed Register Other In
- Failed Register Other Out
- Failed Register Out
- Failed Subscribe In
- Failed Subscribe Out
- Other Dialogs Average

- Other Dialogs In
- Other Dialogs Out
- Other Dialogs Rate In Average
- Other Dialogs Rate In Max
- Other Dialogs Rate Out Average
- Other Dialogs Rate Out Max
- Register In
- Register Out
- Register Rate In Average
- Register Rate In Max
- Register Rate Out Average
- Register Rate Out Max
- Registered Users Average
- Registered Users Max
- SBC Attempted Registrations
- SBC Registration Success Ratio Average
- SBC Successful Registrations
- Subscribe In
- Subscribe Out
- Subscribe Rate In Average
- Subscribe Rate In Max
- Subscribe Rate Out Average
- Subscribe Rate Out Max
- Transaction Rate Average
- Transaction Rate Max
- User Registration Success Ratio Average
- User Successful Registrations

Active Subscribes Average

Field	Value
Parameter Name	Active Subscribes Average

Field	Value
Description	Average number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/activeSubscribesAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Subscribes Max

Field	Value
Parameter Name	Active Subscribes Max
Description	Maximum number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/activeSubscribesMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs In

Field	Value
Parameter	Failed Other Dialogs In

Field	Value
Name	
Description	Number of Failed Inbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedOtherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs Out

Field	Value
Parameter Name	Failed Other Dialogs Out
Description	Number of Failed Outbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedOtherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Register Admission In

Field	Value
Parameter Name	Failed Register Admission In
Description	Number of inbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbcs/otherStats/ipGroup/failedRegisterAdmissionIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Admission Out

Field	Value
Parameter Name	Failed Register Admission Out
Description	Number of outbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbcs/otherStats/ipGroup/failedRegisterAdmissionOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register In

Field	Value
Parameter Name	Failed Register In
Description	Number of failed inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedRegisterIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register No Route In

Field	Value
Parameter Name	Failed Register No Route In
Description	Number of inbound REGISTER dialogs failed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedRegisterNoRouteIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Other In

Field	Value
Parameter Name	Failed Register Other In
Description	Number of inbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedRegisterOtherIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Other Out

Field	Value
Parameter Name	Failed Register Other Out
Description	Number of outbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedRegisterOtherOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Out

Field	Value
Parameter Name	Failed Register Out
Description	Number of failed outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedRegisterOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe In

Field	Value
Parameter Name	Failed Subscribe In
Description	Number of Failed Inbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedSubscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe Out

Field	Value
Parameter Name	Failed Subscribe Out
Description	Number of Failed Outbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/failedSubscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Average

Field	Value
Parameter Name	Other Dialogs Average
Description	Average number of active other dialogs (not INVITE,SUBSCRIBE,REGISTER)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/otherDialogsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs In

Field	Value
Parameter Name	Other Dialogs In
Description	Number of inbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/otherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Dialogs Out

Field	Value
Parameter Name	Other Dialogs Out
Description	Number of outbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/otherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Average

Field	Value
Parameter Name	Other Dialogs Rate In Average
Description	Average inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/otherDialogsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Max

Field	Value
Parameter Name	Other Dialogs Rate In Max
Description	Maximum inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/otherDialogsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Average

Field	Value
Parameter Name	Other Dialogs Rate Out Average
Description	Average outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/otherDialogsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Max

Field	Value
Parameter Name	Other Dialogs Rate Out Max
Description	Maximum outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/otherDialogsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register In

Field	Value
Parameter Name	Register In
Description	Number of inbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Out

Field	Value
Parameter Name	Register Out
Description	Number of outbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate In Average

Field	Value
Parameter Name	Register Rate In Average
Description	Average rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate In Max

Field	Value
Parameter Name	Register Rate In Max
Description	Maximum rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate Out Average

Field	Value
Parameter Name	Register Rate Out Average
Description	Average rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate Out Max

Field	Value
Parameter Name	Register Rate Out Max
Description	Maximum rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registerRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Registered Users Average

Field	Value
Parameter Name	Registered Users Average
Description	Average number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registeredUsersAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Registered Users Max

Field	Value
Parameter Name	Registered Users Max
Description	Maximum number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/registeredUsersMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC Attempted Registrations

Field	Value
Parameter Name	SBC Attempted Registrations
Description	Number of SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/sbcAttemptedRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Registration Success Ratio Average

Field	Value
Parameter Name	SBC Registration Success Ratio Average
Description	Average success ratio for SBC-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/sbcRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Successful Registrations

Field	Value
Parameter Name	SBC Successful Registrations
Description	Number of successful SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/sbcSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe In

Field	Value
Parameter Name	Subscribe In
Description	Number of inbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/subscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Out

Field	Value
Parameter Name	Subscribe Out
Description	Number of outbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/ipGroup/subscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Average

Field	Value
Parameter Name	Subscribe Rate In Average
Description	Average inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/subscribeRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Max

Field	Value
Parameter Name	Subscribe Rate In Max
Description	Maximum inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/subscribeRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Average

Field	Value
Parameter Name	Subscribe Rate Out Average
Description	Average outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/subscribeRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Max

Field	Value
Parameter Name	Subscribe Rate Out Max
Description	Maximum outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/subscribeRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Average

Field	Value
Parameter Name	Transaction Rate Average
Description	Average SIP rransactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/transactionRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Max

Field	Value
Parameter Name	Transaction Rate Max
Description	Maximum SIP transactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/transactionRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

User Registration Success Ratio Average

Field	Value
Parameter Name	User Registration Success Ratio Average
Description	Average success ratio for user-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/userRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

User Successful Registrations

Field	Value
Parameter Name	User Successful Registrations
Description	Number of successful user-initiated inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/ipGroup/userSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC SIP Rec Stats

The following lists the SBC SIP Rec Stats-related performance monitoring elements

- SIP Rec Rate Average
- SIP Rec Sessions Average
- SIP Rec Sessions Max

SIP Rec Rate Average

Field	Value
Parameter Name	SIP Rec Rate Average
Description	Average establishment rate for SIP-REC sessions (sessions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	sbcsipRecStats/ipGroup/sipRecRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Average

Field	Value
Parameter Name	SIP Rec Sessions Average
Description	Average number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcsipRecStats/ipGroup/sipRecSessionsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Max

Field	Value
Parameter Name	SIP Rec Sessions Max
Description	Maximum number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	sbc/sipRecStats/ipGroup/sipRecSessionsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC User Defined

The following lists the SBC User Defined-related performance monitoring elements

- User Defined Failures In 1
- User Defined Failures In 10
- User Defined Failures In 11
- User Defined Failures In 12
- User Defined Failures In 13
- User Defined Failures In 14
- User Defined Failures In 15
- User Defined Failures In 16
- User Defined Failures In 17
- User Defined Failures In 18
- User Defined Failures In 19
- User Defined Failures In 2
- User Defined Failures In 20
- User Defined Failures In 21
- User Defined Failures In 22
- User Defined Failures In 23
- User Defined Failures In 24
- User Defined Failures In 25
- User Defined Failures In 26
- User Defined Failures In 3
- User Defined Failures In 4
- User Defined Failures In 5
- User Defined Failures In 6

- User Defined Failures In 7
- User Defined Failures In 8
- User Defined Failures In 9
- User Defined Failures Out 1
- User Defined Failures Out 10
- User Defined Failures Out 11
- User Defined Failures Out 12
- User Defined Failures Out 13
- User Defined Failures Out 14
- User Defined Failures Out 15
- User Defined Failures Out 16
- User Defined Failures Out 17
- User Defined Failures Out 18
- User Defined Failures Out 19
- User Defined Failures Out 2
- User Defined Failures Out 20
- User Defined Failures Out 21
- User Defined Failures Out 22
- User Defined Failures Out 23
- User Defined Failures Out 24
- User Defined Failures Out 25
- User Defined Failures Out 26
- User Defined Failures Out 3
- User Defined Failures Out 4
- User Defined Failures Out 5
- User Defined Failures Out 6
- User Defined Failures Out 7
- User Defined Failures Out 8
- User Defined Failures Out 9

User Defined Failures In 1

Field	Value
Parameter Name	User Defined Failures In 1
Description	Number of inbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn1
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 10

Field	Value
Parameter Name	User Defined Failures In 10
Description	Number of inbound user defined failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn10
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 11

Field	Value
Parameter Name	User Defined Failures In 11
Description	Number of inbound user defined failures 11
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn11
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 12

Field	Value
Parameter Name	User Defined Failures In 12
Description	Number of inbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn12
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 13

Field	Value
Parameter Name	User Defined Failures In 13
Description	Number of inbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn13
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 14

Field	Value
Parameter Name	User Defined Failures In 14
Description	Number of inbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn14
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 15

Field	Value
Parameter Name	User Defined Failures In 15
Description	Number of inbound user defined failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn15
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 16

Field	Value
Parameter Name	User Defined Failures In 16
Description	Number of inbound user defined failures 16
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn16
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 17

Field	Value
Parameter Name	User Defined Failures In 17
Description	Number of inbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn17
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 18

Field	Value
Parameter Name	User Defined Failures In 18
Description	Number of inbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn18
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 19

Field	Value
Parameter Name	User Defined Failures In 19
Description	Number of inbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn19
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 2

Field	Value
Parameter Name	User Defined Failures In 2
Description	Number of inbound user defined failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn2
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 20

Field	Value
Parameter Name	User Defined Failures In 20
Description	Number of inbound user defined failures 20
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn20
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 21

Field	Value
Parameter Name	User Defined Failures In 21
Description	Number of inbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn21
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 22

Field	Value
Parameter Name	User Defined Failures In 22
Description	Number of inbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn22
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 23

Field	Value
Parameter Name	User Defined Failures In 23
Description	Number of inbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn23
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 24

Field	Value
Parameter Name	User Defined Failures In 24
Description	Number of inbound user defined failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn24
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 25

Field	Value
Parameter Name	User Defined Failures In 25
Description	Number of inbound user defined failures 25
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn25
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 26

Field	Value
Parameter Name	User Defined Failures In 26
Description	Number of inbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn26
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 3

Field	Value
Parameter Name	User Defined Failures In 3
Description	Number of inbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn3
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 4

Field	Value
Parameter Name	User Defined Failures In 4
Description	Number of inbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn4
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 5

Field	Value
Parameter Name	User Defined Failures In 5
Description	Number of inbound user defined failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn5
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 6

Field	Value
Parameter Name	User Defined Failures In 6
Description	Number of inbound user defined failures 6
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn6
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 7

Field	Value
Parameter Name	User Defined Failures In 7
Description	Number of inbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn7
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 8

Field	Value
Parameter Name	User Defined Failures In 8
Description	Number of inbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn8
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 9

Field	Value
Parameter Name	User Defined Failures In 9
Description	Number of inbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresIn9
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 1

Field	Value
Parameter Name	User Defined Failures Out 1
Description	Number of outbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut1
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 10

Field	Value
Parameter Name	User Defined Failures Out 10
Description	Number of outbound user defined failures 10
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut10
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 11

Field	Value
Parameter Name	User Defined Failures Out 11
Description	Number of outbound user defined failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut11
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 12

Field	Value
Parameter Name	User Defined Failures Out 12
Description	Number of outbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut12
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 13

Field	Value
Parameter Name	User Defined Failures Out 13
Description	Number of outbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut13
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 14

Field	Value
Parameter Name	User Defined Failures Out 14
Description	Number of outbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut14
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 15

Field	Value
Parameter Name	User Defined Failures Out 15
Description	Number of outbound user defined failures 15
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbcs/userDefined/ipGroup/userDefinedFailuresOut15
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 16

Field	Value
Parameter Name	User Defined Failures Out 16
Description	Number of outbound user defined failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbcs/userDefined/ipGroup/userDefinedFailuresOut16
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 17

Field	Value
Parameter Name	User Defined Failures Out 17
Description	Number of outbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbcs/userDefined/ipGroup/userDefinedFailuresOut17
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 18

Field	Value
Parameter Name	User Defined Failures Out 18
Description	Number of outbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut18
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 19

Field	Value
Parameter Name	User Defined Failures Out 19
Description	Number of outbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut19
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 2

Field	Value
Parameter Name	User Defined Failures Out 2
Description	Number of outbound user defined failures 2
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut2
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 20

Field	Value
Parameter Name	User Defined Failures Out 20
Description	Number of outbound user defined failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut20
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 21

Field	Value
Parameter Name	User Defined Failures Out 21
Description	Number of outbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut21
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 22

Field	Value
Parameter Name	User Defined Failures Out 22
Description	Number of outbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut22
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 23

Field	Value
Parameter Name	User Defined Failures Out 23
Description	Number of outbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut23
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 24

Field	Value
Parameter Name	User Defined Failures Out 24
Description	Number of outbound user defined failures 24
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbcb/userDefined/ipGroup/userDefinedFailuresOut24
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 25

Field	Value
Parameter Name	User Defined Failures Out 25
Description	Number of outbound user defined failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbcb/userDefined/ipGroup/userDefinedFailuresOut25
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 26

Field	Value
Parameter Name	User Defined Failures Out 26
Description	Number of outbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbcb/userDefined/ipGroup/userDefinedFailuresOut26
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 3

Field	Value
Parameter Name	User Defined Failures Out 3
Description	Number of outbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut3
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 4

Field	Value
Parameter Name	User Defined Failures Out 4
Description	Number of outbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut4
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 5

Field	Value
Parameter Name	User Defined Failures Out 5
Description	Number of outbound user defined failures 5
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut5
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 6

Field	Value
Parameter Name	User Defined Failures Out 6
Description	Number of outbound user defined failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut6
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 7

Field	Value
Parameter Name	User Defined Failures Out 7
Description	Number of outbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut7
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 8

Field	Value
Parameter Name	User Defined Failures Out 8
Description	Number of outbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut8
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 9

Field	Value
Parameter Name	User Defined Failures Out 9
Description	Number of outbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/ipGroup/userDefinedFailuresOut9
Supported Product Types	SW_SBC_GROUP

8 Media (REST)

The following lists the Media (REST) value-related performance monitoring groups

- Cluster Stats
- Coder Stats
- DSP Stats
- Media Stats

Cluster Stats

The following lists the Cluster Stats-related performance monitoring elements

- DSP Cluster Utilization Average
- DSP Cluster Utilization Max
- Media Cluster Utilization Average
- Media Cluster Utilization Max

DSP Cluster Utilization Average

Field	Value
Parameter Name	DSP Cluster Utilization Average
Description	Average utilization of DSP resources in decomposed SBC architecture
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/clusterStats/global/dspClusterUtilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

DSP Cluster Utilization Max

Field	Value
Parameter Name	DSP Cluster Utilization Max
Description	Maximum utilization of DSP resources in decomposed SBC architecture
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/clusterStats/global/dspClusterUtilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Cluster Utilization Average

Field	Value
Parameter Name	Media Cluster Utilization Average
Description	Average utilization of media resources in decomposed SBC architecture
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/clusterStats/global/mediaClusterUtilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Cluster Utilization Max

Field	Value
Parameter Name	Media Cluster Utilization Max
Description	Maximum utilization of media resources in decomposed SBC architecture
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/clusterStats/global/mediaClusterUtilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder Stats

The following lists the Coder Stats-related performance monitoring elements

- Coder AMRNB Average
- Coder AMRNB Max
- Coder AMRWB Average
- Coder AMRWB Max
- Coder EVRC Average
- Coder EVRC Max
- Coder G 711 Average
- Coder G 711 Max
- Coder G 711 alaw Average
- Coder G 711 alaw Max
- Coder G 711 ulaw Average
- Coder G 711 ulaw Max
- Coder G 722 Average
- Coder G 722 Max

- Coder G 723 Average
- Coder G 723 Max
- Coder G 726 Average
- Coder G 726 Max
- Coder G 729 Average
- Coder G 729 EV Average
- Coder G 729 EV Max
- Coder G 729 Max
- Coder GSMEFR Average
- Coder GSMEFR Max
- Coder GSMFR Average
- Coder GSMFR Max
- Coder ILBC Average
- Coder ILBC Max
- Coder OPUSNB Average
- Coder OPUSNB Max
- Coder OPUSWB Average
- Coder OPUSWB Max
- Coder Other Average
- Coder Other Max
- Coder QCELP Average
- Coder QCELP Max
- Coder RTA Average
- Coder RTA Max
- Coder SILKNB Average
- Coder SILKNB Max
- Coder SILKWB Average
- Coder SILKWB Max
- Coder T 38 Average
- Coder T 38 Max

Coder AMRNB Average

Field	Value
Parameter Name	Coder AMRNB Average
Description	Average number of active channels with AMR-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderAMRNBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRNB Max

Field	Value
Parameter Name	Coder AMRNB Max
Description	Maximum number of active channels with AMR-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderAMRNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRWB Average

Field	Value
Parameter Name	Coder AMRWB Average
Description	Average number of active channels with AMR-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderAMRWB Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder AMRWB Max

Field	Value
Parameter Name	Coder AMRWB Max
Description	Maximum number of active channels with AMR-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderAMRWBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder EVRC Average

Field	Value
Parameter Name	Coder EVRC Average
Description	Average number of active channels with EVRC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderEVRCAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder EVRC Max

Field	Value
Parameter Name	Coder EVRC Max
Description	Maximum number of active channels with EVRC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderEVRCMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 alaw Average

Field	Value
Parameter Name	Coder G 711 alaw Average
Description	Average number of active channels with G.711alaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711alawAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 alaw Max

Field	Value
Parameter Name	Coder G 711 alaw Max
Description	Maximum number of active channels with G.711alaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711alawMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 Average

Field	Value
Parameter Name	Coder G 711 Average
Description	Number of active channels with G.711 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 Max

Field	Value
Parameter Name	Coder G 711 Max
Description	Maximum number of active channels with G.711 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 ulaw Average

Field	Value
Parameter Name	Coder G 711 ulaw Average
Description	Average number of active channels with G.711ulaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711ulawAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 711 ulaw Max

Field	Value
Parameter Name	Coder G 711 ulaw Max
Description	Maximum number of active channels with G.711ulaw coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG711ulawMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 722 Average

Field	Value
Parameter Name	Coder G 722 Average
Description	Average number of active channels with G.722 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG722Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 722 Max

Field	Value
Parameter Name	Coder G 722 Max
Description	Maximum number of active channels with G.722 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG722Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 723 Average

Field	Value
Parameter Name	Coder G 723 Average
Description	Average number of active channels with G.723 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG723Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 723 Max

Field	Value
Parameter Name	Coder G 723 Max
Description	Maximum number of active channels with G.723 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG723Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 726 Average

Field	Value
Parameter Name	Coder G 726 Average
Description	Average number of active channels with G.726 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG726Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 726 Max

Field	Value
Parameter Name	Coder G 726 Max
Description	Maximum number of active channels with G.726 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG726Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 Average

Field	Value
Parameter Name	Coder G 729 Average
Description	Average number of active channels with G.729 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG729Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 EV Average

Field	Value
Parameter Name	Coder G 729 EV Average
Description	Average number of active channels with G.729EV coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG729EVAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 EV Max

Field	Value
Parameter Name	Coder G 729 EV Max
Description	Maximum number of active channels with G.729EV coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG729EVMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder G 729 Max

Field	Value
Parameter Name	Coder G 729 Max
Description	Maximum number of active channels with G.729 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderG729Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMEFR Average

Field	Value
Parameter Name	Coder GSMEFR Average
Description	Average number of active channels with GSM-EFR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderGSMEFRAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMEFR Max

Field	Value
Parameter Name	Coder GSMEFR Max
Description	Maximum number of active channels with GSM-EFR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderGSMEFRMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMFR Average

Field	Value
Parameter Name	Coder GSMFR Average
Description	Average number of active channels with GSM-FR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderGSMFRAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder GSMFR Max

Field	Value
Parameter Name	Coder GSMFR Max
Description	Maximum number of active channels with GSM-FR coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderGSMFRMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder ILBC Average

Field	Value
Parameter Name	Coder ILBC Average
Description	Average number of active channels with iLBC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderILBCAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder ILBC Max

Field	Value
Parameter Name	Coder ILBC Max
Description	Maximum number of active channels with iLBC coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderILBCMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSNB Average

Field	Value
Parameter Name	Coder OPUSNB Average
Description	Average number of active channels with OPUS-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOPUSNB Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSNB Max

Field	Value
Parameter Name	Coder OPUSNB Max
Description	Maximum number of active channels with OPUS-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOPUSNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSWB Average

Field	Value
Parameter Name	Coder OPUSWB Average
Description	Average number of active channels with OPUS-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOPUSWBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder OPUSWB Max

Field	Value
Parameter Name	Coder OPUSWB Max
Description	Maximum number of active channels with OPUS-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOPUSWBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder Other Average

Field	Value
Parameter Name	Coder Other Average
Description	Average number of active channels with other coders
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOtherAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder Other Max

Field	Value
Parameter Name	Coder Other Max
Description	Maximum number of active channels with other coders
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderOtherMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder QCELP Average

Field	Value
Parameter Name	Coder QCELP Average
Description	Average number of active channels with QCELP coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderQCELPAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder QCELP Max

Field	Value
Parameter Name	Coder QCELP Max
Description	Maximum number of active channels with QCELP coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderQCELPMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder RTA Average

Field	Value
Parameter Name	Coder RTA Average
Description	Average number of active channels with RTA coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderRTAAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder RTA Max

Field	Value
Parameter Name	Coder RTA Max
Description	Maximum number of active channels with RTA coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderRTAMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKNB Average

Field	Value
Parameter Name	Coder SILKNB Average
Description	Average number of active channels with SILK-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderSILKNB Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKNB Max

Field	Value
Parameter Name	Coder SILKNB Max
Description	Maximum number of active channels with SILK-NB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderSILKNBMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKWB Average

Field	Value
Parameter Name	Coder SILKWB Average
Description	Average number of active channels with SILK-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderSILKWBAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder SILKWB Max

Field	Value
Parameter Name	Coder SILKWB Max
Description	Maximum number of active channels with SILK-WB coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderSILKWBMMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder T 38 Average

Field	Value
Parameter Name	Coder T 38 Average
Description	Average number of active channels with T.38 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderT38Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Coder T 38 Max

Field	Value
Parameter Name	Coder T 38 Max
Description	Maximum number of active channels with T.38 coder
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/coderStats/global/coderT38Max
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

DSP Stats

The following lists the DSP Stats-related performance monitoring elements

- DSP Resource Current Percent Average
- DSP Resource Current Percent Max
- SBC Sessions Coder Transcoding Average
- SBC Sessions Coder Transcoding Max
- SBC Sessions Coder Transcoding Percent Average
- SBC Sessions Coder Transcoding Percent Max
- SBC Transcoding Failed Allocation

DSP Resource Current Percent Average

Field	Value
Parameter Name	DSP Resource Current Percent Average
Description	Average percentage of DSP resources currently used
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/dspStats/global/dspResourceCurrentPercentAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

DSP Resource Current Percent Max

Field	Value
Parameter Name	DSP Resource Current Percent Max
Description	Maximum percentage of DSP resources currently used

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/dspStats/global/dspResourceCurrentPercentMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

SBC Sessions Coder Transcoding Average

Field	Value
Parameter Name	SBC Sessions Coder Transcoding Average
Description	Average number of SBC transcoding sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/dspStats/global/sbcSessionsCoderTranscodingAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

SBC Sessions Coder Transcoding Max

Field	Value
Parameter Name	SBC Sessions Coder Transcoding Max
Description	Maximum number of SBC transcoding sessions

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/dspStats/global/sbcSessionsCoderTranscodingMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

SBC Sessions Coder Transcoding Percent Average

Field	Value
Parameter Name	SBC Sessions Coder Transcoding Percent Average
Description	Average percentage of SBC transcoding sessions (from all sessions)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/dspStats/global/sbcSessionsCoderTranscodingPercentAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

SBC Sessions Coder Transcoding Percent Max

Field	Value
Parameter Name	SBC Sessions Coder Transcoding Percent Max
Description	Maximum percentage of SBC transcoding sessions (from all sessions)

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/dspStats/global/sbcSessionsCoderTranscodingPercentMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

SBC Transcoding Failed Allocation

Field	Value
Parameter Name	SBC Transcoding Failed Allocation
Description	Number of failed transcoding resource allocations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/dspStats/global/sbcTranscodingFailedAllocation
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Media Stats

The following lists the Media Stats-related performance monitoring elements

- Media Bandwidth In Average
- Media Bandwidth Out Average
- Media Delay In Average

- Media Delay In Max
- Media Delay In Min
- Media Delay Out Average
- Media Delay Out Max
- Media Delay Out Min
- Media Jitter In Average
- Media Jitter In Max
- Media Jitter In Min
- Media Jitter Out Average
- Media Jitter Out Max
- Media Jitter Out Min
- Media K Bytes In
- Media K Bytes Out
- Media MOS In Average
- Media MOS In Max
- Media MOS In Min
- Media MOS Out Average
- Media MOS Out Max
- Media MOS Out Min
- Media Packet Loss In Average
- Media Packet Loss In Max
- Media Packet Loss In Min
- Media Packet Loss Out Average
- Media Packet Loss Out Max
- Media Packet Loss Out Min
- Media Packets In
- Media Packets Out
- Media Quality In Max
- Media Quality In Min
- Media Quality Out Max
- Media Quality Out Min
- Media RTP Streams Average

- Media RTP Streams Max
- Media SIP Rec Streams Average
- Media SIP Rec Streams Max
- Media SRTP Streams Average
- Media SRTP Streams Max
- Media Streams Average
- Media Streams Max
- Media Web RTC Streams Average
- Media Web RTC Streams Max

Media Bandwidth In Average

Field	Value
Parameter Name	Media Bandwidth In Average
Description	Average inbound media bandwidth (Kbits per sec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaBandwidthInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Bandwidth Out Average

Field	Value
Parameter Name	Media Bandwidth Out Average
Description	Average outbound media bandwidth (Kbits per sec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaBandwidthOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Media Delay In Average

Field	Value
Parameter Name	Media Delay In Average
Description	Average inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Media Delay In Max

Field	Value
Parameter Name	Media Delay In Max
Description	Maximum inbound media delay (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Min

Field	Value
Parameter Name	Media Delay In Min
Description	Minimum inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay Out Average

Field	Value
Parameter Name	Media Delay Out Average
Description	Average outbound media delay (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Delay Out Max

Field	Value
Parameter Name	Media Delay Out Max
Description	Maximum outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Delay Out Min

Field	Value
Parameter Name	Media Delay Out Min
Description	Minimum outbound media delay (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaDelayOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Average

Field	Value
Parameter Name	Media Jitter In Average
Description	Average inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Max

Field	Value
Parameter Name	Media Jitter In Max
Description	Maximum inbound media jitter (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Min

Field	Value
Parameter Name	Media Jitter In Min
Description	Minimum inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Average

Field	Value
Parameter Name	Media Jitter Out Average
Description	Average outbound media jitter (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Max

Field	Value
Parameter Name	Media Jitter Out Max
Description	Maximum outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Min

Field	Value
Parameter Name	Media Jitter Out Min
Description	Minimum outbound media jitter (msec)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaJitterOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes In

Field	Value
Parameter Name	Media K Bytes In
Description	Amount of inbound media traffic (KBytes)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaKBytesIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes Out

Field	Value
Parameter Name	Media K Bytes Out
Description	Amount of outbound media traffic (KBytes)
Type	Counter

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaKBytesOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Average

Field	Value
Parameter Name	Media MOS In Average
Description	Average inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Max

Field	Value
Parameter Name	Media MOS In Max
Description	Maximum inbound media Mean Opinion Score (MOS) on a scale from 1

Field	Value
	to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Min

Field	Value
Parameter Name	Media MOS In Min
Description	Minimum inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Average

Field	Value
Parameter Name	Media MOS Out Average
Description	Average outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Max

Field	Value
Parameter Name	Media MOS Out Max
Description	Maximum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Min

Field	Value
Parameter Name	Media MOS Out Min
Description	Minimum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaMOSOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Average

Field	Value
Parameter Name	Media Packet Loss In Average
Description	Average inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Max

Field	Value
Parameter Name	Media Packet Loss In Max
Description	Maximum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Min

Field	Value
Parameter Name	Media Packet Loss In Min
Description	Minimum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Average

Field	Value
Parameter Name	Media Packet Loss Out Average
Description	Average outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Max

Field	Value
Parameter Name	Media Packet Loss Out Max
Description	Maximum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Min

Field	Value
Parameter Name	Media Packet Loss Out Min
Description	Minimum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketLossOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets In

Field	Value
Parameter Name	Media Packets In
Description	Number of received media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets Out

Field	Value
Parameter Name	Media Packets Out
Description	Number of transmitted media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaPacketsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality In Max

Field	Value
Parameter Name	Media Quality In Max
Description	Maximum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaQualityInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality In Min

Field	Value
Parameter Name	Media Quality In Min
Description	Minimum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaQualityInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality Out Max

Field	Value
Parameter Name	Media Quality Out Max
Description	Maximum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaQualityOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality Out Min

Field	Value
Parameter Name	Media Quality Out Min
Description	Minimum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaQualityOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media RTP Streams Average

Field	Value
Parameter Name	Media RTP Streams Average
Description	Average number of media RTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaRtpStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media RTP Streams Max

Field	Value
Parameter Name	Media RTP Streams Max
Description	Maximum number of media RTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaRtpStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SIP Rec Streams Average

Field	Value
Parameter Name	Media SIP Rec Streams Average
Description	Average number of media SIP-REC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaSipRecStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SIP Rec Streams Max

Field	Value
Parameter Name	Media SIP Rec Streams Max
Description	Maximum number of media SIP-REC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaSipRecStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SRTP Streams Average

Field	Value
Parameter Name	Media SRTP Streams Average
Description	Average number of media SRTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaSrtpStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media SRTP Streams Max

Field	Value
Parameter Name	Media SRTP Streams Max
Description	Maximum number of media SRTP streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaSrtpStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Streams Average

Field	Value
Parameter Name	Media Streams Average
Description	Average number of media streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Streams Max

Field	Value
Parameter Name	Media Streams Max
Description	Maximum number of media streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	media/mediaStats/global/mediaStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Web RTC Streams Average

Field	Value
Parameter Name	Media Web RTC Streams Average
Description	Average number of media WebRTC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/mediaStats/global/mediaWebRTCStreamsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Web RTC Streams Max

Field	Value
Parameter Name	Media Web RTC Streams Max
Description	Maximum number of media WebRTC streams (legs)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	media/mediaStats/global/mediaWebRTCStreamsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

9 Media Realm (REST)

The following lists the Media Realm (REST) value-related performance monitoring groups

- Media Media Stats

Media Media Stats

The following lists the Media Media Stats-related performance monitoring elements

- Media Bandwidth In Average
- Media Bandwidth Out Average
- Media Delay In Average
- Media Delay In Max
- Media Delay In Min
- Media Delay Out Average
- Media Delay Out Max
- Media Delay Out Min
- Media Jitter In Average
- Media Jitter In Max
- Media Jitter In Min
- Media Jitter Out Average
- Media Jitter Out Max
- Media Jitter Out Min
- Media K Bytes In
- Media K Bytes Out
- Media MOS In Average
- Media MOS In Max
- Media MOS In Min
- Media MOS Out Average
- Media MOS Out Max
- Media MOS Out Min
- Media Packet Loss In Average
- Media Packet Loss In Max
- Media Packet Loss In Min

- Media Packet Loss Out Average
- Media Packet Loss Out Max
- Media Packet Loss Out Min
- Media Packets In
- Media Packets Out
- Media Quality In Max
- Media Quality In Min
- Media Quality Out Max
- Media Quality Out Min

Media Bandwidth In Average

Field	Value
Parameter Name	Media Bandwidth In Average
Description	Average inbound media bandwidth (Kbits per sec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaBandwidthInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Bandwidth Out Average

Field	Value
Parameter Name	Media Bandwidth Out Average

Field	Value
Description	Average outbound media bandwidth (Kbits per sec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaBandwidthOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Average

Field	Value
Parameter Name	Media Delay In Average
Description	Average inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Max

Field	Value
Parameter Name	Media Delay In Max
Description	Maximum inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Delay In Min

Field	Value
Parameter Name	Media Delay In Min
Description	Minimum inbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayInMin

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Delay Out Average

Field	Value
Parameter Name	Media Delay Out Average
Description	Average outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Delay Out Max

Field	Value
Parameter Name	Media Delay Out Max
Description	Maximum outbound media delay (msec)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Delay Out Min

Field	Value
Parameter Name	Media Delay Out Min
Description	Minimum outbound media delay (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaDelayOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Jitter In Average

Field	Value
Parameter Name	Media Jitter In Average

Field	Value
Description	Average inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Max

Field	Value
Parameter Name	Media Jitter In Max
Description	Maximum inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter In Min

Field	Value
Parameter Name	Media Jitter In Min
Description	Minimum inbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Jitter Out Average

Field	Value
Parameter Name	Media Jitter Out Average
Description	Average outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterOutAvg

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Jitter Out Max

Field	Value
Parameter Name	Media Jitter Out Max
Description	Maximum outbound media jitter (msec)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Jitter Out Min

Field	Value
Parameter Name	Media Jitter Out Min
Description	Minimum outbound media jitter (msec)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaJitterOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes In

Field	Value
Parameter Name	Media K Bytes In
Description	Amount of inbound media traffic (KBytes)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaKBytesIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media K Bytes Out

Field	Value
Parameter Name	Media K Bytes Out

Field	Value
Description	Amount of outbound media traffic (KBytes)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaKBytesOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Average

Field	Value
Parameter Name	Media MOS In Average
Description	Average inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaMOSInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Max

Field	Value
Parameter Name	Media MOS In Max
Description	Maximum inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaMOSInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS In Min

Field	Value
Parameter Name	Media MOS In Min
Description	Minimum inbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4

Field	Value
REST URL	media/mediaStats/cpMediaRealm/mediaMOSInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Average

Field	Value
Parameter Name	Media MOS Out Average
Description	Average outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaMOSOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media MOS Out Max

Field	Value
Parameter Name	Media MOS Out Max
Description	Maximum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaMOSOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media MOS Out Min

Field	Value
Parameter Name	Media MOS Out Min
Description	Minimum outbound media Mean Opinion Score (MOS) on a scale from 1 to 5
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaMOSOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Average

Field	Value
Parameter Name	Media Packet Loss In Average
Description	Average inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Max

Field	Value
Parameter Name	Media Packet Loss In Max
Description	Maximum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossInMax

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss In Min

Field	Value
Parameter Name	Media Packet Loss In Min
Description	Minimum inbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Average

Field	Value
Parameter Name	Media Packet Loss Out Average
Description	Average outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Max

Field	Value
Parameter Name	Media Packet Loss Out Max
Description	Maximum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Packet Loss Out Min

Field	Value
Parameter Name	Media Packet Loss Out Min

Field	Value
Description	Minimum outbound media packet loss (in 0.01% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketLossOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets In

Field	Value
Parameter Name	Media Packets In
Description	Number of received media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Packets Out

Field	Value
Parameter Name	Media Packets Out
Description	Number of transmitted media packets
Type	Counter
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaPacketsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Media Quality In Max

Field	Value
Parameter Name	Media Quality In Max
Description	Maximum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaQualityInMax

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Quality In Min

Field	Value
Parameter Name	Media Quality In Min
Description	Minimum inbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaQualityInMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Quality Out Max

Field	Value
Parameter Name	Media Quality Out Max
Description	Maximum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaQualityOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Quality Out Min

Field	Value
Parameter Name	Media Quality Out Min
Description	Minimum outbound media quality (0: Red, 1: Yellow, 2: Green)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
Version Support End	7.4
REST URL	media/mediaStats/cpMediaRealm/mediaQualityOutMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

10 Network (REST)

The following lists the Network (REST) value-related performance monitoring groups

- DDOS Stats
- Ha Stats

DDOS Stats

The following lists the DDOS Stats-related performance monitoring elements

- Attempted SIP Tls Conn
- BI Dropped
- Contrack Dropped
- GI Drop Rate Average
- GI Drop Rate Max
- GI Dropped
- GI Processed
- GI Ratio Average
- GI Ratio Max
- Non SIP Packets
- Rejected SIP Tls Conn
- SIP Packets
- Syn Drop Rate Average
- Syn Drop Rate Max
- Syn Dropped
- Syn Processed
- WI Drop Rate Average
- WI Drop Rate Max
- WI Dropped
- WI Entries Average
- WI Entries Max
- WI Processed
- WI Ratio Average
- WI Ratio Max

Attempted SIP Tls Conn

Field	Value
Parameter Name	Attempted SIP Tls Conn
Description	Number of attempted SIP TLS connections
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/attemptedSipTlsConn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

BI Dropped

Field	Value
Parameter Name	BI Dropped
Description	Number of IP packets dropped by Black List
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/blDropped
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Contrack Dropped

Field	Value
Parameter Name	Contrack Dropped
Description	Number of TCP connections dropped by contrack
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/contrackDropped
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Drop Rate Average

Field	Value
Parameter Name	GI Drop Rate Average
Description	Average packet drop rate by Grey List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIDropRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Drop Rate Max

Field	Value
Parameter Name	GI Drop Rate Max
Description	Maximum packet drop rate by Grey List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIDropRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Dropped

Field	Value
Parameter Name	GI Dropped
Description	Number of IP packets dropped by Grey List
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIDropped
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Processed

Field	Value
Parameter Name	GI Processed
Description	Number of IP packets processed by Grey List
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIProcessed
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Ratio Average

Field	Value
Parameter Name	GI Ratio Average
Description	Average percentage of SIP packets processed by Grey List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

GI Ratio Max

Field	Value
Parameter Name	GI Ratio Max
Description	Maximum percentage of SIP packets processed by Grey List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/gIRatioMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Non SIP Packets

Field	Value
Parameter Name	Non SIP Packets
Description	Number of non-SIP packets received
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/nonSipPackets
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Rejected SIP Tls Conn

Field	Value
Parameter Name	Rejected SIP Tls Conn
Description	Number of rejected SIP TLS connections
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/rejectedSipTlsConn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Packets

Field	Value
Parameter Name	SIP Packets
Description	Number of SIP packets received
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/sipPackets
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Syn Drop Rate Average

Field	Value
Parameter Name	Syn Drop Rate Average
Description	Average drop rate of TCP SYN packets (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/synDropRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Syn Drop Rate Max

Field	Value
Parameter Name	Syn Drop Rate Max
Description	Maximum drop rate of TCP SYN packets (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/synDropRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Syn Dropped

Field	Value
Parameter Name	Syn Dropped
Description	Number of TCP SYN packets dropped
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/synDropped
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Syn Processed

Field	Value
Parameter Name	Syn Processed
Description	Number of TCP SYN packets processed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/synProcessed
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Drop Rate Average

Field	Value
Parameter Name	WI Drop Rate Average
Description	Average packet drop rate by White List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlDropRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Drop Rate Max

Field	Value
Parameter Name	WI Drop Rate Max
Description	Maximum packet drop rate by White List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlDropRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Dropped

Field	Value
Parameter Name	WI Dropped
Description	Number of IP packets dropped by White List
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlDropped
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Entries Average

Field	Value
Parameter Name	WI Entries Average
Description	Average number of entries in White List table
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlEntriesAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Entries Max

Field	Value
Parameter Name	WI Entries Max
Description	Maximum number of entries in White List table
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlEntriesMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Processed

Field	Value
Parameter Name	WI Processed
Description	Number of IP packets processed by White List
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlProcessed
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Ratio Average

Field	Value
Parameter Name	WI Ratio Average
Description	Average percentage of SIP packets processed by White List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

WI Ratio Max

Field	Value
Parameter Name	WI Ratio Max
Description	Maximum percentage of SIP packets processed by White List (0.1% units)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/ddosStats/global/wlRatioMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Ha Stats

The following lists the Ha Stats-related performance monitoring elements

- Ha Active Packet Loss Average
- Ha Active Packet Loss Max
- Ha Redundant Packet Loss Average
- Ha Redundant Packet Loss Max

Ha Active Packet Loss Average

Field	Value
Parameter Name	Ha Active Packet Loss Average
Description	Average percent of HA KA packets lost by Active unit (in 0.01%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/haStats/global/haActivePacketLossAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Ha Active Packet Loss Max

Field	Value
Parameter Name	Ha Active Packet Loss Max
Description	Maximum percent of HA KA packets lost by Active unit (in 0.01%)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	network/haStats/global/haActivePacketLossMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Ha Redundant Packet Loss Average

Field	Value
Parameter Name	Ha Redundant Packet Loss Average
Description	Average percent of HA KA packets lost by Redundant unit (in 0.01%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	network/haStats/global/haRedundantPacketLossAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Ha Redundant Packet Loss Max

Field	Value
Parameter Name	Ha Redundant Packet Loss Max
Description	Maximum percent of HA KA packets lost by Redundant unit (in 0.01%)
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4
REST URL	network/haStats/global/haRedundantPacketLossMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

11 Partition (REST)

The following lists the Partition (REST) value-related performance monitoring groups

- System Storage Stats

System Storage Stats

The following lists the System Storage Stats-related performance monitoring elements

- Storage Usage Average
- Storage Usage Max
- Storage Utilization Average
- Storage Utilization Max

Storage Usage Average

Field	Value
Parameter Name	Storage Usage Average
Description	Average storage usage (Kbytes)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/storageStats/partition/storageUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Storage Usage Max

Field	Value
Parameter Name	Storage Usage Max

Field	Value
Description	Maximum storage usage (Kbytes)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/storageStats/partition/storageUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Storage Utilization Average

Field	Value
Parameter Name	Storage Utilization Average
Description	Average storage utilization (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/storageStats/partition/storageUtilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Storage Utilization Max

Field	Value
Parameter	Storage Utilization Max

Field	Value
Name	
Description	Maximum storage utilization (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/storageStats/partition/storageUtilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

12 Port (REST)

The following lists the Port (REST) value-related performance monitoring groups

- Network Port Stats

Network Port Stats

The following lists the Network Port Stats-related performance monitoring elements

- Broadcast In
- Broadcast Out
- Bytes In
- Bytes Out
- Carrier Errors Out
- Collisions
- Compressed In
- Compressed Out
- Discard In
- Dropped In
- Dropped Out
- FCS Error In
- FCS Error Out
- FIFO Error In
- FIFO Error Out
- Frame Error In
- Multicast In
- Multicast Out
- Packets In
- Packets Out
- Unicast In
- Unicast Out

Broadcast In

Field	Value
Parameter Name	Broadcast In
Description	Number of received broadcast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/broadcastIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Broadcast Out

Field	Value
Parameter Name	Broadcast Out
Description	Number of trasmitted broadcast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/broadcastOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Bytes In

Field	Value
Parameter Name	Bytes In
Description	Number of received bytes
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/bytesIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Bytes Out

Field	Value
Parameter Name	Bytes Out
Description	Number of transmitted bytes
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/bytesOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Carrier Errors Out

Field	Value
Parameter Name	Carrier Errors Out
Description	Number of transmitted carrier errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/carrierErrorsOut
Supported Product Types	SW_SBC_GROUP

Collisions

Field	Value
Parameter Name	Collisions
Description	Number of collisions
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/collisions
Supported Product Types	SW_SBC_GROUP

Compressed In

Field	Value
Parameter Name	Compressed In
Description	Number of received compressed packets
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4.100
REST URL	network/portStats/port/compressedIn
Supported Product Types	SW_SBC_GROUP

Compressed Out

Field	Value
Parameter Name	Compressed Out
Description	Number of transmitted compressed packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/compressedOut
Supported Product Types	SW_SBC_GROUP

Discard In

Field	Value
Parameter Name	Discard In
Description	Number of received packets discarded
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/discardIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_

Field	Value
	MSBG_GROUP; M3100_ESBC_GROUP

Dropped In

Field	Value
Parameter Name	Dropped In
Description	Number of received packets dropped
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/droppedIn
Supported Product Types	SW_SBC_GROUP

Dropped Out

Field	Value
Parameter Name	Dropped Out
Description	Number of transmitted packets dropped
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/droppedOut
Supported Product Types	SW_SBC_GROUP

FCS Error In

Field	Value
Parameter Name	FCS Error In

Field	Value
Description	Number of received FCS errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/fcsErrorIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

FCS Error Out

Field	Value
Parameter Name	FCS Error Out
Description	Number of transmitted FCS errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/fcsErrorOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

FIFO Error In

Field	Value
Parameter Name	FIFO Error In

Field	Value
Description	Number of received FIFO errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/fifoErrorIn
Supported Product Types	SW_SBC_GROUP

FIFO Error Out

Field	Value
Parameter Name	FIFO Error Out
Description	Number of transmitted FIFO errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/fifoErrorOut
Supported Product Types	SW_SBC_GROUP

Frame Error In

Field	Value
Parameter Name	Frame Error In
Description	Number of received frame errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/frameErrorIn

Field	Value
Supported Product Types	SW_SBC_GROUP

Multicast In

Field	Value
Parameter Name	Multicast In
Description	Number of received multicast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/multicastIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Multicast Out

Field	Value
Parameter Name	Multicast Out
Description	Number of transmitted unicast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/multicastOut
Supported	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_

Field	Value
Product Types	GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Packets In

Field	Value
Parameter Name	Packets In
Description	Number of received packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/packetsIn
Supported Product Types	SW_SBC_GROUP

Packets Out

Field	Value
Parameter Name	Packets Out
Description	Number of transmitted packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/packetsOut
Supported Product Types	SW_SBC_GROUP

Unicast In

Field	Value
Parameter	Unicast In

Field	Value
Name	
Description	Number of received unicast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/unicastIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Unicast Out

Field	Value
Parameter Name	Unicast Out
Description	Number of transmitted unicast packets
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	network/portStats/port/unicastOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

13 SBC

The following lists the SBC value-related performance monitoring groups

- Call Stats
- Quality Stats
- Other Stats
- Failure Stats

Call Stats

The following lists the Call Stats-related performance monitoring elements

- ACD Average
- ACD Max
- ACD Min
- AMR Active Calls Average
- AMR Active Calls Max
- AMR Active Calls Min
- AMR-WB Active Calls Average
- AMR-WB Active Calls Max
- AMR-WB Active Calls Min
- ASR Average
- ASR Max
- ASR Min
- Attempted Calls
- EG711 Active Calls Average
- EG711 Active Calls Max
- EG711 Active Calls Min
- EVRC Active Calls Average
- EVRC Active Calls Max
- EVRC Active Calls Min
- G711 Active Calls Average
- G711 Active Calls Max
- G711 Active Calls Min

- G711A Active Calls Average
- G711A Active Calls Max
- G711A Active Calls Min
- G711U Active Calls Average
- G711U Active Calls Max
- G711U Active Calls Min
- G722 Active Calls Average
- G722 Active Calls Max
- G722 Active Calls Min
- G723 Active Calls Average
- G723 Active Calls Max
- G723 Active Calls Min
- G726 Active Calls Average
- G726 Active Calls Max
- G726 Active Calls Min
- G727 Active Calls Average
- G727 Active Calls Max
- G727 Active Calls Min
- G728 Active Calls Average
- G728 Active Calls Max
- G728 Active Calls Min
- G729EV Active Calls Average
- G729EV Active Calls Max
- G729EV Active Calls Min
- G729a Active Calls Average
- G729a Active Calls Max
- G729a Active Calls Min
- G729e Active Calls Average
- G729e Active Calls Max
- G729e Active Calls Min
- GSM Active Calls Average
- GSM Active Calls Max

- GSM Active Calls Min
- ILBC Active Calls Average
- ILBC Active Calls Max
- ILBC Active Calls Min
- IN CAPS Average
- IN CAPS Max
- IN CAPS Min
- In Attempted Calls
- In Established Calls
- In Short Calls
- Media Broken Connection Calls
- NER Average
- NER Max
- NER Min
- OUT CAPS Average
- OUT CAPS Max
- Out Attempted Calls
- Out Established Calls
- Out Short Calls
- QCELP Active Calls Average
- QCELP Active Calls Max
- QCELP Active Calls Min
- RTA Active Calls Average
- RTA Active Calls Max
- RTA Active Calls Min
- SILK Active Calls Average
- SILK Active Calls Max
- SILK Active Calls Min
- SPEEX Active Calls Average
- SPEEX Active Calls Max
- SPEEX Active Calls Min
- VOXADPCM Active Calls Average

- VOXADPCM Active Calls Max
- VOXADPCM Active Calls Min

ACD Average

Field	Value
Parameter Name	ACD Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCAcAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ACD Max

Field	Value
Parameter Name	ACD Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300

Field	Value
MIB Name	acPMSBCAcMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

ACD Min

Field	Value
Parameter Name	ACD Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCAcMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

AMR Active Calls Average

Field	Value
Parameter Name	AMR Active Calls Average
Type	Gauge
Aggregation	Yes

Field	Value
Support	
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageAMR
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

AMR Active Calls Max

Field	Value
Parameter Name	AMR Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxAMR
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

AMR Active Calls Min

Field	Value
Parameter Name	AMR Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinAMR
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

AMR-WB Active Calls Average

Field	Value
Parameter Name	AMR-WB Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageARMWB
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

AMR-WB Active Calls Max

Field	Value
Parameter Name	AMR-WB Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxARMWB
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

AMR-WB Active Calls Min

Field	Value
Parameter Name	AMR-WB Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinARMWB
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Average

Field	Value
Parameter Name	ASR Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCAsrAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Max

Field	Value
Parameter	ASR Max

Field	Value
Name	
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCAsrMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Min

Field	Value
Parameter Name	ASR Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCAsrMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Attempted Calls

Field	Value
Parameter Name	Attempted Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSIPSBCAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

EG711 Active Calls Average

Field	Value
Parameter Name	EG711 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderAverageEG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

EG711 Active Calls Max

Field	Value
Parameter Name	EG711 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxEG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

EG711 Active Calls Min

Field	Value
Parameter Name	EG711 Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinEG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

EVRC Active Calls Average

Field	Value
Parameter Name	EVRC Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageEVRC
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

EVRC Active Calls Max

Field	Value
Parameter Name	EVRC Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxEVRC
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

EVRC Active Calls Min

Field	Value
Parameter Name	EVRC Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinEVRC
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G711 Active Calls Average

Field	Value
Parameter Name	G711 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G711 Active Calls Max

Field	Value
Parameter Name	G711 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G711 Active Calls Min

Field	Value
Parameter Name	G711 Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG711
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G711A Active Calls Average

Field	Value
Parameter	G711A Active Calls Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderG711AverageA
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G711A Active Calls Max

Field	Value
Parameter Name	G711A Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderG711MaxA
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G711A Active Calls Min

Field	Value
Parameter Name	G711A Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderG711MinA
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G711U Active Calls Average

Field	Value
Parameter Name	G711U Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderG711AverageU
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G711U Active Calls Max

Field	Value
Parameter Name	G711U Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderG711MaxU
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G711U Active Calls Min

Field	Value
Parameter Name	G711U Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderG711MinU
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G722 Active Calls Average

Field	Value
Parameter Name	G722 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG722
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G722 Active Calls Max

Field	Value
Parameter Name	G722 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG722
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G722 Active Calls Min

Field	Value
Parameter Name	G722 Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG722
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G723 Active Calls Average

Field	Value
Parameter Name	G723 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG723
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G723 Active Calls Max

Field	Value
Parameter Name	G723 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG723
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G723 Active Calls Min

Field	Value
Parameter Name	G723 Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG723
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G726 Active Calls Average

Field	Value
Parameter	G726 Active Calls Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG726
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G726 Active Calls Max

Field	Value
Parameter Name	G726 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG726
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

G726 Active Calls Min

Field	Value
Parameter Name	G726 Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG726
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

G727 Active Calls Average

Field	Value
Parameter Name	G727 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderAverageG727
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G727 Active Calls Max

Field	Value
Parameter Name	G727 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG727
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G727 Active Calls Min

Field	Value
Parameter Name	G727 Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG727
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G728 Active Calls Average

Field	Value
Parameter Name	G728 Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG728
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G728 Active Calls Max

Field	Value
Parameter Name	G728 Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG728
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G728 Active Calls Min

Field	Value
Parameter Name	G728 Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG728
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G729a Active Calls Average

Field	Value
Parameter Name	G729a Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG729a
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G729a Active Calls Max

Field	Value
Parameter Name	G729a Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG729a
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

G729a Active Calls Min

Field	Value
Parameter Name	G729a Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG729a
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

G729e Active Calls Average

Field	Value
Parameter	G729e Active Calls Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageG729e
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

G729e Active Calls Max

Field	Value
Parameter Name	G729e Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG729e
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G729e Active Calls Min

Field	Value
Parameter Name	G729e Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG729e
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G729EV Active Calls Average

Field	Value
Parameter Name	G729EV Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderAverageG729EV
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G729EV Active Calls Max

Field	Value
Parameter Name	G729EV Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxG729EV
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

G729EV Active Calls Min

Field	Value
Parameter Name	G729EV Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinG729EV
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

GSM Active Calls Average

Field	Value
Parameter Name	GSM Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageGSM
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

GSM Active Calls Max

Field	Value
Parameter Name	GSM Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxGSM
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

GSM Active Calls Min

Field	Value
Parameter Name	GSM Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinGSM
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ILBC Active Calls Average

Field	Value
Parameter Name	ILBC Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageILBC
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ILBC Active Calls Max

Field	Value
Parameter Name	ILBC Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxILBC
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ILBC Active Calls Min

Field	Value
Parameter Name	ILBC Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinILBC
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Attempted Calls

Field	Value
Parameter	In Attempted Calls

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IN CAPS Average

Field	Value
Parameter Name	IN CAPS Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCInCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IN CAPS Max

Field	Value
Parameter Name	IN CAPS Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCInCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

IN CAPS Min

Field	Value
Parameter Name	IN CAPS Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCInCapsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Established Calls

Field	Value
Parameter Name	In Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Short Calls

Field	Value
Parameter Name	In Short Calls
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInShortCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCMediaBrokenConnectionCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Average

Field	Value
Parameter Name	NER Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCNerAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Max

Field	Value
Parameter Name	NER Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCNerMax
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Min

Field	Value
Parameter Name	NER Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCNerMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Attempted Calls

Field	Value
Parameter Name	Out Attempted Calls
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCOutAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

OUT CAPS Average

Field	Value
Parameter Name	OUT CAPS Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCOutCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

OUT CAPS Max

Field	Value
Parameter	OUT CAPS Max

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCOutCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Established Calls

Field	Value
Parameter Name	Out Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Short Calls

Field	Value
Parameter Name	Out Short Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutShortCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

QCELP Active Calls Average

Field	Value
Parameter Name	QCELP Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderAverageQCELP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

QCELP Active Calls Max

Field	Value
Parameter Name	QCELP Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxQCELP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

QCELP Active Calls Min

Field	Value
Parameter Name	QCELP Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinQCELP
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

RTA Active Calls Average

Field	Value
Parameter Name	RTA Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageRTA
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

RTA Active Calls Max

Field	Value
Parameter Name	RTA Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxRTA
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

RTA Active Calls Min

Field	Value
Parameter Name	RTA Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinRTA
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

SILK Active Calls Average

Field	Value
Parameter Name	SILK Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageSILK
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

SILK Active Calls Max

Field	Value
Parameter Name	SILK Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxSILK
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

SILK Active Calls Min

Field	Value
Parameter Name	SILK Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinSILK
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

SPEEX Active Calls Average

Field	Value
Parameter	SPEEX Active Calls Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderAverageSPEEX
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

SPEEX Active Calls Max

Field	Value
Parameter Name	SPEEX Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxSPEEX
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

SPEEX Active Calls Min

Field	Value
Parameter Name	SPEEX Active Calls Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinSPEEX
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

VOXADPCM Active Calls Average

Field	Value
Parameter Name	VOXADPCM Active Calls Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMChannelsPerCoderAverageVOXADPCM
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

VOXADPCM Active Calls Max

Field	Value
Parameter Name	VOXADPCM Active Calls Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMaxVOXADPCM
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

VOXADPCM Active Calls Min

Field	Value
Parameter Name	VOXADPCM Active Calls Min
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMChannelsPerCoderMinVOXADPCM
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Failure Stats

The following lists the Failure Stats-related performance monitoring elements

- In User Defined Failures 1
- In User Defined Failures 10
- In User Defined Failures 11
- In User Defined Failures 12
- In User Defined Failures 13
- In User Defined Failures 14
- In User Defined Failures 15
- In User Defined Failures 16
- In User Defined Failures 17
- In User Defined Failures 18
- In User Defined Failures 19
- In User Defined Failures 2
- In User Defined Failures 20
- In User Defined Failures 21
- In User Defined Failures 22
- In User Defined Failures 23
- In User Defined Failures 24

- In User Defined Failures 25
- In User Defined Failures 26
- In User Defined Failures 3
- In User Defined Failures 4
- In User Defined Failures 5
- In User Defined Failures 6
- In User Defined Failures 7
- In User Defined Failures 8
- In User Defined Failures 9
- Out User Defined Failures 1
- Out User Defined Failures 10
- Out User Defined Failures 11
- Out User Defined Failures 12
- Out User Defined Failures 13
- Out User Defined Failures 14
- Out User Defined Failures 15
- Out User Defined Failures 16
- Out User Defined Failures 17
- Out User Defined Failures 18
- Out User Defined Failures 19
- Out User Defined Failures 2
- Out User Defined Failures 20
- Out User Defined Failures 21
- Out User Defined Failures 22
- Out User Defined Failures 23
- Out User Defined Failures 24
- Out User Defined Failures 25
- Out User Defined Failures 26
- Out User Defined Failures 3
- Out User Defined Failures 4
- Out User Defined Failures 5
- Out User Defined Failures 6

- Out User Defined Failures 7
- Out User Defined Failures 8
- Out User Defined Failures 9

In User Defined Failures 1

Field	Value
Parameter Name	In User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 10

Field	Value
Parameter Name	In User Defined Failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCInUserDefinedFailures10Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 11

Field	Value
Parameter Name	In User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 12

Field	Value
Parameter Name	In User Defined Failures 12
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 13

Field	Value
Parameter Name	In User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures13Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 14

Field	Value
Parameter Name	In User Defined Failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 15

Field	Value
Parameter Name	In User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures15Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 16

Field	Value
Parameter Name	In User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 17

Field	Value
Parameter Name	In User Defined Failures 17
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 18

Field	Value
Parameter Name	In User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 19

Field	Value
Parameter	In User Defined Failures 19

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 2

Field	Value
Parameter Name	In User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures2Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 20

Field	Value
Parameter Name	In User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 21

Field	Value
Parameter Name	In User Defined Failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCInUserDefinedFailures21Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 22

Field	Value
Parameter Name	In User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 23

Field	Value
Parameter Name	In User Defined Failures 23
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 24

Field	Value
Parameter Name	In User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures24Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 25

Field	Value
Parameter Name	In User Defined Failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In User Defined Failures 26

Field	Value
Parameter Name	In User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures26Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 3

Field	Value
Parameter Name	In User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 4

Field	Value
Parameter Name	In User Defined Failures 4
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 5

Field	Value
Parameter Name	In User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

In User Defined Failures 6

Field	Value
Parameter	In User Defined Failures 6

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 7

Field	Value
Parameter Name	In User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures7Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

In User Defined Failures 8

Field	Value
Parameter Name	In User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

In User Defined Failures 9

Field	Value
Parameter Name	In User Defined Failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCInUserDefinedFailures9Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 1

Field	Value
Parameter Name	Out User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 10

Field	Value
Parameter Name	Out User Defined Failures 10
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures10Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 11

Field	Value
Parameter Name	Out User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 12

Field	Value
Parameter Name	Out User Defined Failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 13

Field	Value
Parameter Name	Out User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures13Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 14

Field	Value
Parameter Name	Out User Defined Failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 15

Field	Value
Parameter Name	Out User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures15Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 16

Field	Value
Parameter Name	Out User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 17

Field	Value
Parameter	Out User Defined Failures 17

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 18

Field	Value
Parameter Name	Out User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 19

Field	Value
Parameter Name	Out User Defined Failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 2

Field	Value
Parameter Name	Out User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCOutUserDefinedFailures2Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 20

Field	Value
Parameter Name	Out User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 21

Field	Value
Parameter Name	Out User Defined Failures 21
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures21Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 22

Field	Value
Parameter Name	Out User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 23

Field	Value
Parameter Name	Out User Defined Failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 24

Field	Value
Parameter Name	Out User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures24Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 25

Field	Value
Parameter Name	Out User Defined Failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 26

Field	Value
Parameter Name	Out User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures26Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 3

Field	Value
Parameter Name	Out User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out User Defined Failures 4

Field	Value
Parameter	Out User Defined Failures 4

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 5

Field	Value
Parameter Name	Out User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 6

Field	Value
Parameter Name	Out User Defined Failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 7

Field	Value
Parameter Name	Out User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCOutUserDefinedFailures7Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 8

Field	Value
Parameter Name	Out User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 9

Field	Value
Parameter Name	Out User Defined Failures 9
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutUserDefinedFailures9Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Other Stats

The following lists the Other Stats-related performance monitoring elements

- In Attempted Registrations
- In Successful Registrations
- Media Legs Average
- Media Legs Max
- Media Legs Min
- Out Attempted Registrations
- Out Successful Registrations
- Registered Users Average
- Registered Users Max
- Registered Users Min
- Transcoding Sessions Average
- Transcoding Sessions Max
- Transcoding Sessions Min

In Attempted Registrations

Field	Value
Parameter Name	In Attempted Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Successful Registrations

Field	Value
Parameter Name	In Successful Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCInSuccessfulRegistrationsVal
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Media Legs Average

Field	Value
Parameter Name	Media Legs Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCMediaLegsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Media Legs Max

Field	Value
Parameter Name	Media Legs Max
Type	Gauge
Aggregation Support	Yes
Version	7.0

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCMediaLegsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Media Legs Min

Field	Value
Parameter Name	Media Legs Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCMediaLegsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Attempted Registrations

Field	Value
Parameter	Out Attempted Registrations

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Out Successful Registrations

Field	Value
Parameter Name	Out Successful Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCOutSuccessfulRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Registered Users Average

Field	Value
Parameter Name	Registered Users Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCRegisteredUsersAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Registered Users Max

Field	Value
Parameter Name	Registered Users Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCRegisteredUsersMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Registered Users Min

Field	Value
Parameter Name	Registered Users Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCRegisteredUsersMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Transcoding Sessions Average

Field	Value
Parameter Name	Transcoding Sessions Average
Type	Gauge

Field	Value
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCTranscodingSessionsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Transcoding Sessions Max

Field	Value
Parameter Name	Transcoding Sessions Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCTranscodingSessionsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Transcoding Sessions Min

Field	Value
Parameter Name	Transcoding Sessions Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSBCTranscodingSessionsMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Quality Stats

The following lists the Quality Stats-related performance monitoring elements

- RTP delay Average
- RTP delay Max
- RTP delay Min
- RTP jitter Average
- RTP jitter Max
- RTP jitter Min
- Rx RTP Packet Loss Max
- Tx RTP Packet Loss Max

RTP delay Average

Field	Value
Parameter	RTP delay Average

Field	Value
Name	
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModulePacketDelayAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

RTP delay Max

Field	Value
Parameter Name	RTP delay Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModulePacketDelayMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

RTP delay Min

Field	Value
Parameter Name	RTP delay Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModulePacketDelayMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

RTP jitter Average

Field	Value
Parameter Name	RTP jitter Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMModulePacketJitterAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

RTP jitter Max

Field	Value
Parameter Name	RTP jitter Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModulePacketJitterMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

RTP jitter Min

Field	Value
Parameter Name	RTP jitter Min
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModulePacketJitterMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Rx RTP Packet Loss Max

Field	Value
Parameter Name	Rx RTP Packet Loss Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModuleRTTPacketLossRxMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Tx RTP Packet Loss Max

Field	Value
Parameter Name	Tx RTP Packet Loss Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMModuleRTPPacketLossTxMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

14 SBC (REST)

The following lists the SBC (REST) value-related performance monitoring groups

- Call Stats
- Other Stats
- SIP Rec Stats
- User Defined

Call Stats

The following lists the Call Stats-related performance monitoring elements

- Abnormal Terminated Calls In
- Abnormal Terminated Calls Out
- Active Calls In Average
- Active Calls In Max
- Active Calls Out Average
- Active Calls Out Max
- Active Sessions Average
- Active Sessions Max
- Admission Failed Calls In
- Admission Failed Calls Out
- Answer Seizure Ratio Average
- Attempted Calls In
- Attempted Calls Out
- Attempted Calls Rate In Average
- Attempted Calls Rate In Max
- Attempted Calls Rate Out Average
- Attempted Calls Rate Out Max
- Average Call Duration Average
- Busy Calls In
- Busy Calls Out
- Classification Failed Calls In
- Established Calls In

- Established Calls Out
- Established Calls Rate In Average
- Established Calls Rate In Max
- Established Calls Rate Out Average
- Established Calls Rate Out Max
- Forwarded Calls In
- Forwarded Calls Out
- Long Calls Counter
- Media Broken Connection Calls
- Media Mismatch Calls In
- Media Mismatch Calls Out
- Minutes Of Usage
- Network Effectiveness Ratio Average
- No Answer Calls In
- No Answer Calls Out
- No Resources Calls In
- No Resources Calls Out
- No Route Calls In
- Not Establish Calls In
- Not Establish Calls Out
- Not Establish Failed Calls In
- Not Establish Failed Calls Out
- Not Establish Success Calls In
- Not Establish Success Calls Out
- Other Reason Calls In
- Other Reason Calls Out
- Post Dial Delay Average
- Post Dial Delay Max
- Post Dial Delay Min
- Short Calls Counter

Abnormal Terminated Calls In

Field	Value
Parameter Name	Abnormal Terminated Calls In
Description	Number of abnormally terminated inbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/abnormalTerminatedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Abnormal Terminated Calls Out

Field	Value
Parameter Name	Abnormal Terminated Calls Out
Description	Number of abnormally terminated outbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/abnormalTerminatedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls In Average

Field	Value
Parameter Name	Active Calls In Average
Description	Average number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/activeCallsInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls In Max

Field	Value
Parameter Name	Active Calls In Max
Description	Maximum number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/activeCallsInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Out Average

Field	Value
Parameter Name	Active Calls Out Average
Description	Average number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/activeCallsOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Out Max

Field	Value
Parameter Name	Active Calls Out Max
Description	Maximum number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/activeCallsOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Sessions Average

Field	Value
Parameter Name	Active Sessions Average
Description	Average number of active SBC sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/global/activeSessionsAvg
Supported Product Types	SW_SBC_GROUP

Active Sessions Max

Field	Value
Parameter Name	Active Sessions Max
Description	Maximum number of active SBC sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/global/activeSessionsMax
Supported Product Types	SW_SBC_GROUP

Admission Failed Calls In

Field	Value
Parameter Name	Admission Failed Calls In
Description	Number of inbound calls closed due to admission control (CAC)
Type	Counter

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/admissionFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Admission Failed Calls Out

Field	Value
Parameter Name	Admission Failed Calls Out
Description	Number of outbound calls closed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/admissionFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Attempted Calls In

Field	Value
Parameter Name	Attempted Calls In
Description	Number of attempted inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Out

Field	Value
Parameter Name	Attempted Calls Out

Field	Value
Description	Number of attempted outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Average

Field	Value
Parameter Name	Attempted Calls Rate In Average
Description	Average rate of attempted inbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Max

Field	Value
Parameter	Attempted Calls Rate In Max

Field	Value
Name	
Description	Maximum rate of attempted inbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Average

Field	Value
Parameter Name	Attempted Calls Rate Out Average
Description	Average rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Max

Field	Value
Parameter Name	Attempted Calls Rate Out Max
Description	Maximum rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/attemptedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Busy Calls In

Field	Value
Parameter Name	Busy Calls In
Description	Number of inbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/busyCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Busy Calls Out

Field	Value
Parameter Name	Busy Calls Out
Description	Number of outbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/busyCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Classification Failed Calls In

Field	Value
Parameter Name	Classification Failed Calls In
Description	Number of inbound calls closed due to classification failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/classificationFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls In

Field	Value
Parameter Name	Established Calls In
Description	Number of established inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Established Calls Out

Field	Value
Parameter Name	Established Calls Out
Description	Number of established outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Average

Field	Value
Parameter Name	Established Calls Rate In Average
Description	Average rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Max

Field	Value
Parameter Name	Established Calls Rate In Max
Description	Maximum rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Average

Field	Value
Parameter Name	Established Calls Rate Out Average
Description	Average rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Max

Field	Value
Parameter Name	Established Calls Rate Out Max
Description	Maximum rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/establishedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls In

Field	Value
Parameter Name	Forwarded Calls In
Description	Number of forwarded inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/forwardedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls Out

Field	Value
Parameter Name	Forwarded Calls Out
Description	Number of forwarded outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/forwardedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Long Calls Counter

Field	Value
Parameter Name	Long Calls Counter
Description	Number of calls with duration longer than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/longCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Description	Number of calls that failed due to broken connection
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcs/callStats/global/mediaBrokenConnectionCalls
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls In

Field	Value
Parameter Name	Media Mismatch Calls In
Description	Number of inbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcs/callStats/global/mediaMismatchCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls Out

Field	Value
Parameter Name	Media Mismatch Calls Out
Description	Number of outbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/mediaMismatchCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Minutes Of Usage

Field	Value
Parameter Name	Minutes Of Usage
Description	Sum in minutes of call duration
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/minutesOfUsage
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Network Effectiveness Ratio Average

Field	Value
Parameter Name	Network Effectiveness Ratio Average
Description	Average network effectiveness ratio (NER, %)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/networkEffectivenessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Answer Calls In

Field	Value
Parameter Name	No Answer Calls In
Description	Number of inbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/noAnswerCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Answer Calls Out

Field	Value
Parameter Name	No Answer Calls Out
Description	Number of outbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/noAnswerCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Resources Calls In

Field	Value
Parameter Name	No Resources Calls In
Description	Number of inbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/noResourcesCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Resources Calls Out

Field	Value
Parameter Name	No Resources Calls Out
Description	Number of outbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/noResourcesCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Route Calls In

Field	Value
Parameter Name	No Route Calls In
Description	Number of inbound calls closed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/noRouteCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Calls In

Field	Value
Parameter Name	Not Establish Calls In
Description	Number of not established inbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/global/notEstablishCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Calls Out

Field	Value
Parameter Name	Not Establish Calls Out
Description	Number of not established outbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/global/notEstablishCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls In

Field	Value
Parameter Name	Not Establish Failed Calls In
Description	Number of not established inbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/notEstablishFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls Out

Field	Value
Parameter Name	Not Establish Failed Calls Out
Description	Number of not established outbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/notEstablishFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls In

Field	Value
Parameter Name	Not Establish Success Calls In
Description	Number of not established inbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/notEstablishSuccessCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls Out

Field	Value
Parameter Name	Not Establish Success Calls Out
Description	Number of not established outbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/notEstablishSuccessCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Reason Calls In

Field	Value
Parameter Name	Other Reason Calls In
Description	Number of inbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/otherReasonCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Reason Calls Out

Field	Value
Parameter Name	Other Reason Calls Out
Description	Number of outbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/otherReasonCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Post Dial Delay Average

Field	Value
Parameter Name	Post Dial Delay Average
Description	Average number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/postDialDelayAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Post Dial Delay Max

Field	Value
Parameter Name	Post Dial Delay Max
Description	Maximum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/postDialDelayMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Post Dial Delay Min

Field	Value
Parameter Name	Post Dial Delay Min
Description	Minimum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/postDialDelayMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Short Calls Counter

Field	Value
Parameter Name	Short Calls Counter
Description	Number of calls with duration shorter than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/global/shortCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Stats

The following lists the Other Stats-related performance monitoring elements

- Active Subscribes Average
- Active Subscribes Max
- Failed Other Dialogs In
- Failed Other Dialogs Out
- Failed Register Admission In
- Failed Register Admission Out
- Failed Register Classification In
- Failed Register In
- Failed Register No Route In
- Failed Register Other In
- Failed Register Other Out
- Failed Register Out
- Failed Subscribe In
- Failed Subscribe Out
- Other Dialogs Average
- Other Dialogs In
- Other Dialogs Out
- Other Dialogs Rate In Average
- Other Dialogs Rate In Max
- Other Dialogs Rate Out Average
- Other Dialogs Rate Out Max
- Register In
- Register Out
- Register Rate In Average
- Register Rate In Max
- Register Rate Out Average
- Register Rate Out Max
- Registered Users Average
- Registered Users Max
- SBC Attempted Registrations

- SBC Registration Success Ratio Average
- SBC Successful Registrations
- Subscribe In
- Subscribe Out
- Subscribe Rate In Average
- Subscribe Rate In Max
- Subscribe Rate Out Average
- Subscribe Rate Out Max
- Transaction Rate Average
- Transaction Rate Max
- User Registration Success Ratio Average
- User Successful Registrations

Active Subscribes Average

Field	Value
Parameter Name	Active Subscribes Average
Description	Average number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcs/otherStats/global/activeSubscribesAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Subscribes Max

Field	Value
Parameter	Active Subscribes Max

Field	Value
Name	
Description	Maximum number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/activeSubscribesMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs In

Field	Value
Parameter Name	Failed Other Dialogs In
Description	Number of Failed Inbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedOtherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs Out

Field	Value
Parameter Name	Failed Other Dialogs Out
Description	Number of Failed Outbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedOtherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Admission In

Field	Value
Parameter Name	Failed Register Admission In
Description	Number of inbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterAdmissionIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Admission Out

Field	Value
Parameter Name	Failed Register Admission Out
Description	Number of outbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterAdmissionOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Register Classification In

Field	Value
Parameter Name	Failed Register Classification In
Description	Number of inbound REGISTER dialogs failed due to classification failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterClassificationIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Register In

Field	Value
Parameter Name	Failed Register In
Description	Number of failed inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register No Route In

Field	Value
Parameter Name	Failed Register No Route In
Description	Number of inbound REGISTER dialogs failed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterNoRouteIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Other In

Field	Value
Parameter Name	Failed Register Other In
Description	Number of inbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterOtherIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Other Out

Field	Value
Parameter Name	Failed Register Other Out
Description	Number of outbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterOtherOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Out

Field	Value
Parameter Name	Failed Register Out
Description	Number of failed outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedRegisterOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe In

Field	Value
Parameter Name	Failed Subscribe In
Description	Number of Failed Inbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedSubscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe Out

Field	Value
Parameter Name	Failed Subscribe Out
Description	Number of Failed Outbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/failedSubscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Other Dialogs Average

Field	Value
Parameter Name	Other Dialogs Average
Description	Average number of active other dialogs (not INVITE,SUBSCRIBE,REGISTER)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/otherDialogsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Other Dialogs In

Field	Value
Parameter Name	Other Dialogs In
Description	Number of inbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/otherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Dialogs Out

Field	Value
Parameter Name	Other Dialogs Out
Description	Number of outbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/otherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Average

Field	Value
Parameter Name	Other Dialogs Rate In Average
Description	Average inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/otherDialogsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Max

Field	Value
Parameter Name	Other Dialogs Rate In Max
Description	Maximum inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/otherDialogsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Average

Field	Value
Parameter Name	Other Dialogs Rate Out Average
Description	Average outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/otherDialogsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Max

Field	Value
Parameter Name	Other Dialogs Rate Out Max
Description	Maximum outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/otherDialogsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register In

Field	Value
Parameter Name	Register In
Description	Number of inbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Register Out

Field	Value
Parameter Name	Register Out
Description	Number of outbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Register Rate In Average

Field	Value
Parameter Name	Register Rate In Average
Description	Average rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate In Max

Field	Value
Parameter Name	Register Rate In Max
Description	Maximum rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate Out Average

Field	Value
Parameter Name	Register Rate Out Average
Description	Average rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate Out Max

Field	Value
Parameter Name	Register Rate Out Max
Description	Maximum rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registerRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Registered Users Average

Field	Value
Parameter Name	Registered Users Average
Description	Average number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registeredUsersAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Registered Users Max

Field	Value
Parameter Name	Registered Users Max
Description	Maximum number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/registeredUsersMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC Attempted Registrations

Field	Value
Parameter Name	SBC Attempted Registrations
Description	Number of SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/sbcAttemptedRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Registration Success Ratio Average

Field	Value
Parameter Name	SBC Registration Success Ratio Average
Description	Average success ratio for SBC-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/sbcRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Successful Registrations

Field	Value
Parameter Name	SBC Successful Registrations
Description	Number of successful SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/sbcSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe In

Field	Value
Parameter Name	Subscribe In
Description	Number of inbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/subscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Out

Field	Value
Parameter Name	Subscribe Out
Description	Number of outbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/global/subscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Average

Field	Value
Parameter Name	Subscribe Rate In Average
Description	Average inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/subscribeRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Max

Field	Value
Parameter Name	Subscribe Rate In Max
Description	Maximum inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/subscribeRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Average

Field	Value
Parameter Name	Subscribe Rate Out Average
Description	Average outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/subscribeRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Max

Field	Value
Parameter Name	Subscribe Rate Out Max
Description	Maximum outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/subscribeRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Average

Field	Value
Parameter Name	Transaction Rate Average
Description	Average SIP rransactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/transactionRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Max

Field	Value
Parameter Name	Transaction Rate Max
Description	Maximum SIP transactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/transactionRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

User Registration Success Ratio Average

Field	Value
Parameter Name	User Registration Success Ratio Average
Description	Average success ratio for user-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/userRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

User Successful Registrations

Field	Value
Parameter Name	User Successful Registrations
Description	Number of successful user-initiated inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/global/userSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Stats

The following lists the SIP Rec Stats-related performance monitoring elements

- SIP Rec Rate Average
- SIP Rec Sessions Average
- SIP Rec Sessions Max

SIP Rec Rate Average

Field	Value
Parameter Name	SIP Rec Rate Average
Description	Average establishment rate for SIP-REC sessions (sessions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	sbcsipRecStats/global/sipRecRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Average

Field	Value
Parameter Name	SIP Rec Sessions Average
Description	Average Number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcsipRecStats/global/sipRecSessionsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Max

Field	Value
Parameter Name	SIP Rec Sessions Max
Description	Maximum number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	sbc/sipRecStats/global/sipRecSessionsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

User Defined

The following lists the User Defined-related performance monitoring elements

- User Defined Failures In 1
- User Defined Failures In 10
- User Defined Failures In 11
- User Defined Failures In 12
- User Defined Failures In 13
- User Defined Failures In 14
- User Defined Failures In 15
- User Defined Failures In 16
- User Defined Failures In 17
- User Defined Failures In 18
- User Defined Failures In 19
- User Defined Failures In 2
- User Defined Failures In 20
- User Defined Failures In 21
- User Defined Failures In 22
- User Defined Failures In 23
- User Defined Failures In 24
- User Defined Failures In 25
- User Defined Failures In 26
- User Defined Failures In 3
- User Defined Failures In 4
- User Defined Failures In 5
- User Defined Failures In 6

- User Defined Failures In 7
- User Defined Failures In 8
- User Defined Failures In 9
- User Defined Failures Out 1
- User Defined Failures Out 10
- User Defined Failures Out 11
- User Defined Failures Out 12
- User Defined Failures Out 13
- User Defined Failures Out 14
- User Defined Failures Out 15
- User Defined Failures Out 16
- User Defined Failures Out 17
- User Defined Failures Out 18
- User Defined Failures Out 19
- User Defined Failures Out 2
- User Defined Failures Out 20
- User Defined Failures Out 21
- User Defined Failures Out 22
- User Defined Failures Out 23
- User Defined Failures Out 24
- User Defined Failures Out 25
- User Defined Failures Out 26
- User Defined Failures Out 3
- User Defined Failures Out 4
- User Defined Failures Out 5
- User Defined Failures Out 6
- User Defined Failures Out 7
- User Defined Failures Out 8
- User Defined Failures Out 9

User Defined Failures In 1

Field	Value
Parameter Name	User Defined Failures In 1
Description	Number of inbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn1
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 10

Field	Value
Parameter Name	User Defined Failures In 10
Description	Number of inbound user defined failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn10
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 11

Field	Value
Parameter Name	User Defined Failures In 11
Description	Number of inbound user defined failures 11
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn11
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 12

Field	Value
Parameter Name	User Defined Failures In 12
Description	Number of inbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn12
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 13

Field	Value
Parameter Name	User Defined Failures In 13
Description	Number of inbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn13
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 14

Field	Value
Parameter Name	User Defined Failures In 14
Description	Number of inbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn14
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 15

Field	Value
Parameter Name	User Defined Failures In 15
Description	Number of inbound user defined failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn15
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 16

Field	Value
Parameter Name	User Defined Failures In 16
Description	Number of inbound user defined failures 16
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn16
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 17

Field	Value
Parameter Name	User Defined Failures In 17
Description	Number of inbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn17
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 18

Field	Value
Parameter Name	User Defined Failures In 18
Description	Number of inbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn18
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 19

Field	Value
Parameter Name	User Defined Failures In 19
Description	Number of inbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn19
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 2

Field	Value
Parameter Name	User Defined Failures In 2
Description	Number of inbound user defined failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn2
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 20

Field	Value
Parameter Name	User Defined Failures In 20
Description	Number of inbound user defined failures 20
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn20
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 21

Field	Value
Parameter Name	User Defined Failures In 21
Description	Number of inbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn21
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 22

Field	Value
Parameter Name	User Defined Failures In 22
Description	Number of inbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn22
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 23

Field	Value
Parameter Name	User Defined Failures In 23
Description	Number of inbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn23
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 24

Field	Value
Parameter Name	User Defined Failures In 24
Description	Number of inbound user defined failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn24
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 25

Field	Value
Parameter Name	User Defined Failures In 25
Description	Number of inbound user defined failures 25
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn25
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 26

Field	Value
Parameter Name	User Defined Failures In 26
Description	Number of inbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn26
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 3

Field	Value
Parameter Name	User Defined Failures In 3
Description	Number of inbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn3
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 4

Field	Value
Parameter Name	User Defined Failures In 4
Description	Number of inbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn4
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 5

Field	Value
Parameter Name	User Defined Failures In 5
Description	Number of inbound user defined failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn5
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 6

Field	Value
Parameter Name	User Defined Failures In 6
Description	Number of inbound user defined failures 6
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn6
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 7

Field	Value
Parameter Name	User Defined Failures In 7
Description	Number of inbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn7
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 8

Field	Value
Parameter Name	User Defined Failures In 8
Description	Number of inbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn8
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 9

Field	Value
Parameter Name	User Defined Failures In 9
Description	Number of inbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresIn9
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 1

Field	Value
Parameter Name	User Defined Failures Out 1
Description	Number of outbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut1
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 10

Field	Value
Parameter Name	User Defined Failures Out 10
Description	Number of outbound user defined failures 10
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut10
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 11

Field	Value
Parameter Name	User Defined Failures Out 11
Description	Number of outbound user defined failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut11
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 12

Field	Value
Parameter Name	User Defined Failures Out 12
Description	Number of outbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut12
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 13

Field	Value
Parameter Name	User Defined Failures Out 13
Description	Number of outbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut13
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 14

Field	Value
Parameter Name	User Defined Failures Out 14
Description	Number of outbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut14
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 15

Field	Value
Parameter Name	User Defined Failures Out 15
Description	Number of outbound user defined failures 15
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut15
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 16

Field	Value
Parameter Name	User Defined Failures Out 16
Description	Number of outbound user defined failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut16
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 17

Field	Value
Parameter Name	User Defined Failures Out 17
Description	Number of outbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut17
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 18

Field	Value
Parameter Name	User Defined Failures Out 18
Description	Number of outbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut18
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 19

Field	Value
Parameter Name	User Defined Failures Out 19
Description	Number of outbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut19
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 2

Field	Value
Parameter Name	User Defined Failures Out 2
Description	Number of outbound user defined failures 2
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut2
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 20

Field	Value
Parameter Name	User Defined Failures Out 20
Description	Number of outbound user defined failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut20
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 21

Field	Value
Parameter Name	User Defined Failures Out 21
Description	Number of outbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut21
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 22

Field	Value
Parameter Name	User Defined Failures Out 22
Description	Number of outbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut22
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 23

Field	Value
Parameter Name	User Defined Failures Out 23
Description	Number of outbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut23
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 24

Field	Value
Parameter Name	User Defined Failures Out 24
Description	Number of outbound user defined failures 24
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut24
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 25

Field	Value
Parameter Name	User Defined Failures Out 25
Description	Number of outbound user defined failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut25
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 26

Field	Value
Parameter Name	User Defined Failures Out 26
Description	Number of outbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut26
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 3

Field	Value
Parameter Name	User Defined Failures Out 3
Description	Number of outbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut3
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 4

Field	Value
Parameter Name	User Defined Failures Out 4
Description	Number of outbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut4
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 5

Field	Value
Parameter Name	User Defined Failures Out 5
Description	Number of outbound user defined failures 5
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut5
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 6

Field	Value
Parameter Name	User Defined Failures Out 6
Description	Number of outbound user defined failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut6
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 7

Field	Value
Parameter Name	User Defined Failures Out 7
Description	Number of outbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut7
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 8

Field	Value
Parameter Name	User Defined Failures Out 8
Description	Number of outbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut8
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 9

Field	Value
Parameter Name	User Defined Failures Out 9
Description	Number of outbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/global/userDefinedFailuresOut9
Supported Product Types	SW_SBC_GROUP

15 SRD

The following lists the SRD value-related performance monitoring groups

- Call Stats
- Other Stats
- Failure Stats

Call Stats

The following lists the Call Stats-related performance monitoring elements

- ACD Average
- ACD Max
- ACD Min
- ASR Average
- ASR Max
- ASR Min
- IN CAPS Average
- IN CAPS Max
- In Attempted Calls
- In Established Calls
- In Short Calls
- Invite Dialogs
- Media Broken Connection Calls
- NER Average
- NER Max
- NER Min
- OUT CAPS Average
- OUT CAPS Max
- Out Attempted Calls
- Out Established Calls
- Out Short Calls

ACD Average

Field	Value
Parameter Name	ACD Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdAcAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ACD Max

Field	Value
Parameter Name	ACD Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdAcMax
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ACD Min

Field	Value
Parameter Name	ACD Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdAcdMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Average

Field	Value
Parameter Name	ASR Average
Type	Gauge
Aggregation Support	No
Version	7.2

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSrdAsrAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Max

Field	Value
Parameter Name	ASR Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdAsrMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

ASR Min

Field	Value
Parameter	ASR Min

Field	Value
Name	
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdAsrMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In Attempted Calls

Field	Value
Parameter Name	In Attempted Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

IN CAPS Average

Field	Value
Parameter Name	IN CAPS Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdInCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

IN CAPS Max

Field	Value
Parameter Name	IN CAPS Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSrdInCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Established Calls

Field	Value
Parameter Name	In Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In Short Calls

Field	Value
Parameter Name	In Short Calls
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInShortCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Invite Dialogs

Field	Value
Parameter Name	Invite Dialogs
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPSRDInviteDialogsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDMediaBrokenConnectionCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Average

Field	Value
Parameter Name	NER Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdNerAverage
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Max

Field	Value
Parameter Name	NER Max
Type	Gauge
Aggregation Support	No
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdNerMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

NER Min

Field	Value
Parameter Name	NER Min
Type	Gauge
Aggregation Support	No
Version	7.2

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSrdNerMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Attempted Calls

Field	Value
Parameter Name	Out Attempted Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutAttemptedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

OUT CAPS Average

Field	Value
Parameter	OUT CAPS Average

Field	Value
Name	
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdOutCapsAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

OUT CAPS Max

Field	Value
Parameter Name	OUT CAPS Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSBCSrdOutCapsMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out Established Calls

Field	Value
Parameter Name	Out Established Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutEstablishedCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out Short Calls

Field	Value
Parameter Name	Out Short Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSRDOutShortCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Failure Stats

The following lists the Failure Stats-related performance monitoring elements

- In User Defined Failures 1
- In User Defined Failures 10
- In User Defined Failures 11
- In User Defined Failures 12
- In User Defined Failures 13
- In User Defined Failures 14
- In User Defined Failures 15
- In User Defined Failures 16
- In User Defined Failures 17
- In User Defined Failures 18
- In User Defined Failures 19
- In User Defined Failures 2
- In User Defined Failures 20
- In User Defined Failures 21
- In User Defined Failures 22
- In User Defined Failures 23
- In User Defined Failures 24
- In User Defined Failures 25
- In User Defined Failures 26
- In User Defined Failures 3
- In User Defined Failures 4

- In User Defined Failures 5
- In User Defined Failures 6
- In User Defined Failures 7
- In User Defined Failures 8
- In User Defined Failures 9
- Out User Defined Failures 1
- Out User Defined Failures 10
- Out User Defined Failures 11
- Out User Defined Failures 12
- Out User Defined Failures 13
- Out User Defined Failures 14
- Out User Defined Failures 15
- Out User Defined Failures 16
- Out User Defined Failures 17
- Out User Defined Failures 18
- Out User Defined Failures 19
- Out User Defined Failures 2
- Out User Defined Failures 20
- Out User Defined Failures 21
- Out User Defined Failures 22
- Out User Defined Failures 23
- Out User Defined Failures 24
- Out User Defined Failures 25
- Out User Defined Failures 26
- Out User Defined Failures 3
- Out User Defined Failures 4
- Out User Defined Failures 5
- Out User Defined Failures 6
- Out User Defined Failures 7
- Out User Defined Failures 8
- Out User Defined Failures 9

In User Defined Failures 1

Field	Value
Parameter Name	In User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 10

Field	Value
Parameter Name	In User Defined Failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures10Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 11

Field	Value
Parameter Name	In User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 12

Field	Value
Parameter Name	In User Defined Failures 12
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 13

Field	Value
Parameter Name	In User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures13Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 14

Field	Value
Parameter	In User Defined Failures 14

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 15

Field	Value
Parameter Name	In User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures15Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 16

Field	Value
Parameter Name	In User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 17

Field	Value
Parameter Name	In User Defined Failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSRDInUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 18

Field	Value
Parameter Name	In User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 19

Field	Value
Parameter Name	In User Defined Failures 19
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 2

Field	Value
Parameter Name	In User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures2Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 20

Field	Value
Parameter Name	In User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 21

Field	Value
Parameter Name	In User Defined Failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures21Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 22

Field	Value
Parameter Name	In User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 23

Field	Value
Parameter Name	In User Defined Failures 23
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 24

Field	Value
Parameter Name	In User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures24Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 25

Field	Value
Parameter	In User Defined Failures 25

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 26

Field	Value
Parameter Name	In User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures26Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 3

Field	Value
Parameter Name	In User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 4

Field	Value
Parameter Name	In User Defined Failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSRDIInUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 5

Field	Value
Parameter Name	In User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDIInUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

In User Defined Failures 6

Field	Value
Parameter Name	In User Defined Failures 6
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 7

Field	Value
Parameter Name	In User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures7Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 8

Field	Value
Parameter Name	In User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

In User Defined Failures 9

Field	Value
Parameter Name	In User Defined Failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInUserDefinedFailures9Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 1

Field	Value
Parameter Name	Out User Defined Failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOUserDefinedFailures1Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 10

Field	Value
Parameter Name	Out User Defined Failures 10
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures10Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 11

Field	Value
Parameter Name	Out User Defined Failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures11Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 12

Field	Value
Parameter	Out User Defined Failures 12

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures12Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 13

Field	Value
Parameter Name	Out User Defined Failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures13Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 14

Field	Value
Parameter Name	Out User Defined Failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures14Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 15

Field	Value
Parameter Name	Out User Defined Failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSRDOutUserDefinedFailures15Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 16

Field	Value
Parameter Name	Out User Defined Failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures16Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 17

Field	Value
Parameter Name	Out User Defined Failures 17
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures17Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 18

Field	Value
Parameter Name	Out User Defined Failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures18Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 19

Field	Value
Parameter Name	Out User Defined Failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures19Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 2

Field	Value
Parameter Name	Out User Defined Failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures2Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 20

Field	Value
Parameter Name	Out User Defined Failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures20Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 21

Field	Value
Parameter Name	Out User Defined Failures 21
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures21Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 22

Field	Value
Parameter Name	Out User Defined Failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures22Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 23

Field	Value
Parameter	Out User Defined Failures 23

Field	Value
Name	
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures23Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 24

Field	Value
Parameter Name	Out User Defined Failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures24Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 25

Field	Value
Parameter Name	Out User Defined Failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures25Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBBG_GROUP

Out User Defined Failures 26

Field	Value
Parameter Name	Out User Defined Failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version	7.2.300

Field	Value
Support End	
MIB Name	acPMSBCSRDOutUserDefinedFailures26Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 3

Field	Value
Parameter Name	Out User Defined Failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures3Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Out User Defined Failures 4

Field	Value
Parameter Name	Out User Defined Failures 4
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures4Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 5

Field	Value
Parameter Name	Out User Defined Failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures5Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 6

Field	Value
Parameter Name	Out User Defined Failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures6Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out User Defined Failures 7

Field	Value
Parameter Name	Out User Defined Failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures7Val
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 8

Field	Value
Parameter Name	Out User Defined Failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures8Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSGB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSGB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSGB_GROUP

Out User Defined Failures 9

Field	Value
Parameter Name	Out User Defined Failures 9
Type	Counter
Aggregation Support	Yes
Version	7.2.200

Field	Value
Support Start	
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutUserDefinedFailures9Val
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Other Stats

The following lists the Other Stats-related performance monitoring elements

- Dialogs
- In Attempted Registrations
- In Successful Registrations
- Out Attempted Registrations
- Out Successful Registrations

Dialogs

Field	Value
Parameter Name	Dialogs
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPSRDDialogsVal

Field	Value
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In Attempted Registrations

Field	Value
Parameter Name	In Attempted Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDIInAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

In Successful Registrations

Field	Value
Parameter Name	In Successful Registrations
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDInSuccessfulRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Attempted Registrations

Field	Value
Parameter Name	Out Attempted Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutAttemptedRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Out Successful Registrations

Field	Value
Parameter Name	Out Successful Registrations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.2.200
Version Support End	7.2.300
MIB Name	acPMSBCSRDOutSuccessfulRegistrationsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

16 SRD (REST)

The following lists the SRD (REST) value-related performance monitoring groups

- SBC Call Stats
- SBC Other Stats
- SBC SIP Rec Stats
- SBC User Defined

SBC Call Stats

The following lists the SBC Call Stats-related performance monitoring elements

- Abnormal Terminated Calls In
- Abnormal Terminated Calls Out
- Active Calls In Average
- Active Calls In Max
- Active Calls Out Average
- Active Calls Out Max
- Admission Failed Calls In
- Admission Failed Calls Out
- Answer Seizure Ratio Average
- Attempted Calls In
- Attempted Calls Out
- Attempted Calls Rate In Average
- Attempted Calls Rate In Max
- Attempted Calls Rate Out Average
- Attempted Calls Rate Out Max
- Average Call Duration Average
- Busy Calls In
- Busy Calls Out
- Classification Failed Calls In
- Established Calls In
- Established Calls Out
- Established Calls Rate In Average

- Established Calls Rate In Max
- Established Calls Rate Out Average
- Established Calls Rate Out Max
- Forwarded Calls In
- Forwarded Calls Out
- Long Calls Counter
- Media Broken Connection Calls
- Media Mismatch Calls In
- Media Mismatch Calls Out
- Minutes Of Usage
- Network Effectiveness Ratio Average
- No Answer Calls In
- No Answer Calls Out
- No Resources Calls In
- No Resources Calls Out
- No Route Calls In
- Not Establish Calls In
- Not Establish Calls Out
- Not Establish Failed Calls In
- Not Establish Failed Calls Out
- Not Establish Success Calls In
- Not Establish Success Calls Out
- Other Reason Calls In
- Other Reason Calls Out
- Post Dial Delay Average
- Post Dial Delay Max
- Post Dial Delay Min
- Short Calls Counter

Abnormal Terminated Calls In

Field	Value
Parameter Name	Abnormal Terminated Calls In
Description	Number of abnormally terminated inbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/abnormalTerminatedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Abnormal Terminated Calls Out

Field	Value
Parameter Name	Abnormal Terminated Calls Out
Description	Number of abnormally terminated outbound calls (after connect)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/abnormalTerminatedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Active Calls In Average

Field	Value
Parameter Name	Active Calls In Average
Description	Average number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/activeCallsInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls In Max

Field	Value
Parameter Name	Active Calls In Max
Description	Maximum number of active inbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/activeCallsInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Calls Out Average

Field	Value
Parameter Name	Active Calls Out Average
Description	Average number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/activeCallsOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Out Max

Field	Value
Parameter Name	Active Calls Out Max
Description	Maximum number of active outbound calls (INVITE dialogs in all states)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/activeCallsOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Admission Failed Calls In

Field	Value
Parameter Name	Admission Failed Calls In
Description	Number of inbound calls closed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/admissionFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Admission Failed Calls Out

Field	Value
Parameter Name	Admission Failed Calls Out
Description	Number of outbound calls closed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/admissionFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls In

Field	Value
Parameter Name	Attempted Calls In
Description	Number of attempted inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Out

Field	Value
Parameter Name	Attempted Calls Out
Description	Number of attempted outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Average

Field	Value
Parameter Name	Attempted Calls Rate In Average
Description	Average rate of attempted inbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate In Max

Field	Value
Parameter Name	Attempted Calls Rate In Max
Description	Maximum rate of attempted inbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Average

Field	Value
Parameter Name	Attempted Calls Rate Out Average
Description	Average rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Out Max

Field	Value
Parameter Name	Attempted Calls Rate Out Max
Description	Maximum rate of attempted outbound calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/attemptedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Busy Calls In

Field	Value
Parameter Name	Busy Calls In
Description	Number of inbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/busyCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Busy Calls Out

Field	Value
Parameter Name	Busy Calls Out
Description	Number of outbound calls closed due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/busyCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Classification Failed Calls In

Field	Value
Parameter Name	Classification Failed Calls In
Description	Number of inbound calls closed due to classification failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/classificationFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls In

Field	Value
Parameter Name	Established Calls In
Description	Number of established inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls Out

Field	Value
Parameter Name	Established Calls Out
Description	Number of established outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Average

Field	Value
Parameter Name	Established Calls Rate In Average
Description	Average rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate In Max

Field	Value
Parameter Name	Established Calls Rate In Max
Description	Maximum rate of established inbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Average

Field	Value
Parameter Name	Established Calls Rate Out Average
Description	Average rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Established Calls Rate Out Max

Field	Value
Parameter Name	Established Calls Rate Out Max
Description	Maximum rate of established outbound calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/establishedCallsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls In

Field	Value
Parameter Name	Forwarded Calls In
Description	Number of forwarded inbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/forwardedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls Out

Field	Value
Parameter Name	Forwarded Calls Out
Description	Number of forwarded outbound calls (INVITE dialogs)
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/forwardedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Long Calls Counter

Field	Value
Parameter Name	Long Calls Counter
Description	Number of calls with duration longer than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/longCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Broken Connection Calls

Field	Value
Parameter Name	Media Broken Connection Calls
Description	Number of calls that failed due to broken connection
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/mediaBrokenConnectionCalls
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls In

Field	Value
Parameter Name	Media Mismatch Calls In
Description	Number of inbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/mediaMismatchCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Media Mismatch Calls Out

Field	Value
Parameter Name	Media Mismatch Calls Out
Description	Number of outbound calls closed due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/mediaMismatchCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Minutes Of Usage

Field	Value
Parameter Name	Minutes Of Usage
Description	Sum in minutes of call duration
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/minutesOfUsage
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Network Effectiveness Ratio Average

Field	Value
Parameter Name	Network Effectiveness Ratio Average
Description	Average network effectiveness ratio (NER, %)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/networkEffectivenessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

No Answer Calls In

Field	Value
Parameter Name	No Answer Calls In
Description	Number of inbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/noAnswerCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

No Answer Calls Out

Field	Value
Parameter Name	No Answer Calls Out
Description	Number of outbound calls closed due to no answer from callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/noAnswerCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

No Resources Calls In

Field	Value
Parameter Name	No Resources Calls In
Description	Number of inbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/noResourcesCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

No Resources Calls Out

Field	Value
Parameter Name	No Resources Calls Out
Description	Number of outbound calls closed due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/noResourcesCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

No Route Calls In

Field	Value
Parameter Name	No Route Calls In
Description	Number of inbound calls closed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/noRouteCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Calls In

Field	Value
Parameter Name	Not Establish Calls In
Description	Number of not established inbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/srd/notEstablishCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Calls Out

Field	Value
Parameter Name	Not Establish Calls Out
Description	Number of not established outbound calls (due to all reasons)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/callStats/srd/notEstablishCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls In

Field	Value
Parameter Name	Not Establish Failed Calls In
Description	Number of not established inbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/notEstablishFailedCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Not Establish Failed Calls Out

Field	Value
Parameter Name	Not Establish Failed Calls Out
Description	Number of not established outbound calls configured as failed
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/notEstablishFailedCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls In

Field	Value
Parameter Name	Not Establish Success Calls In
Description	Number of not established inbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/notEstablishSuccessCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Not Establish Success Calls Out

Field	Value
Parameter Name	Not Establish Success Calls Out
Description	Number of not established outbound calls configured as success
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/notEstablishSuccessCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Other Reason Calls In

Field	Value
Parameter Name	Other Reason Calls In
Description	Number of inbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/otherReasonCallsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Other Reason Calls Out

Field	Value
Parameter Name	Other Reason Calls Out
Description	Number of outbound calls closed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/otherReasonCallsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Post Dial Delay Average

Field	Value
Parameter Name	Post Dial Delay Average
Description	Average number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/postDialDelayAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Post Dial Delay Max

Field	Value
Parameter Name	Post Dial Delay Max
Description	Maximum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/postDialDelayMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Post Dial Delay Min

Field	Value
Parameter Name	Post Dial Delay Min
Description	Minimum number of seconds from INVITE to response
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/postDialDelayMin
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Short Calls Counter

Field	Value
Parameter Name	Short Calls Counter
Description	Number of calls with duration shorter than pre-set threshold
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/callStats/srd/shortCallsCounter
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Other Stats

The following lists the SBC Other Stats-related performance monitoring elements

- Active Subscribes Average
- Active Subscribes Max
- Failed Other Dialogs In
- Failed Other Dialogs Out
- Failed Register Admission In
- Failed Register Admission Out
- Failed Register Classification In
- Failed Register In
- Failed Register No Route In
- Failed Register Other In
- Failed Register Other Out
- Failed Register Out
- Failed Subscribe In
- Failed Subscribe Out
- Other Dialogs Average
- Other Dialogs In
- Other Dialogs Out
- Other Dialogs Rate In Average
- Other Dialogs Rate In Max
- Other Dialogs Rate Out Average
- Other Dialogs Rate Out Max
- Register In
- Register Out
- Register Rate In Average
- Register Rate In Max
- Register Rate Out Average
- Register Rate Out Max
- Registered Users Average
- Registered Users Max
- SBC Attempted Registrations

- SBC Registration Success Ratio Average
- SBC Successful Registrations
- Subscribe In
- Subscribe Out
- Subscribe Rate In Average
- Subscribe Rate In Max
- Subscribe Rate Out Average
- Subscribe Rate Out Max
- Transaction Rate Average
- Transaction Rate Max
- User Registration Success Ratio Average
- User Successful Registrations

Active Subscribes Average

Field	Value
Parameter Name	Active Subscribes Average
Description	Average number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbcs/otherStats/srd/activeSubscribesAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Active Subscribes Max

Field	Value
Parameter	Active Subscribes Max

Field	Value
Name	
Description	Maximum number of active SUBSCRIBE dialogs
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/activeSubscribesMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs In

Field	Value
Parameter Name	Failed Other Dialogs In
Description	Number of Failed Inbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedOtherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Other Dialogs Out

Field	Value
Parameter Name	Failed Other Dialogs Out
Description	Number of Failed Outbound other dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedOtherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Failed Register Admission In

Field	Value
Parameter Name	Failed Register Admission In
Description	Number of inbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterAdmissionIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Failed Register Admission Out

Field	Value
Parameter Name	Failed Register Admission Out
Description	Number of outbound REGISTER dialogs failed due to admission control (CAC)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterAdmissionOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Failed Register Classification In

Field	Value
Parameter Name	Failed Register Classification In
Description	Number of inbound REGISTER dialogs failed due to classification failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterClassificationIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Failed Register In

Field	Value
Parameter Name	Failed Register In
Description	Number of failed inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Register No Route In

Field	Value
Parameter Name	Failed Register No Route In
Description	Number of inbound REGISTER dialogs failed due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterNoRouteIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Failed Register Other In

Field	Value
Parameter Name	Failed Register Other In
Description	Number of inbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterOtherIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Other Out

Field	Value
Parameter Name	Failed Register Other Out
Description	Number of outbound REGISTER dialogs failed due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterOtherOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Register Out

Field	Value
Parameter Name	Failed Register Out
Description	Number of failed outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedRegisterOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe In

Field	Value
Parameter Name	Failed Subscribe In
Description	Number of Failed Inbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedSubscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Subscribe Out

Field	Value
Parameter Name	Failed Subscribe Out
Description	Number of Failed Outbound SUBSCRIBE dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/failedSubscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Other Dialogs Average

Field	Value
Parameter Name	Other Dialogs Average
Description	Average number of active other dialogs (not INVITE,SUBSCRIBE,REGISTER)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/otherDialogsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Other Dialogs In

Field	Value
Parameter Name	Other Dialogs In
Description	Number of inbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/otherDialogsIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Out

Field	Value
Parameter Name	Other Dialogs Out
Description	Number of outbound other requests (not INVITE,SUBSCRIBE,REGISTER)
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/otherDialogsOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Average

Field	Value
Parameter Name	Other Dialogs Rate In Average
Description	Average inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/otherDialogsRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate In Max

Field	Value
Parameter Name	Other Dialogs Rate In Max
Description	Maximum inbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/otherDialogsRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Average

Field	Value
Parameter Name	Other Dialogs Rate Out Average
Description	Average outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/otherDialogsRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Other Dialogs Rate Out Max

Field	Value
Parameter Name	Other Dialogs Rate Out Max
Description	Maximum outbound other dialogs rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/otherDialogsRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register In

Field	Value
Parameter Name	Register In
Description	Number of inbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Out

Field	Value
Parameter Name	Register Out
Description	Number of outbound registrations
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate In Average

Field	Value
Parameter Name	Register Rate In Average
Description	Average rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate In Max

Field	Value
Parameter Name	Register Rate In Max
Description	Maximum rate of inbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Register Rate Out Average

Field	Value
Parameter Name	Register Rate Out Average
Description	Average rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Register Rate Out Max

Field	Value
Parameter Name	Register Rate Out Max
Description	Maximum rate of outbound registrations (registrations per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registerRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Registered Users Average

Field	Value
Parameter Name	Registered Users Average
Description	Average number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registeredUsersAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Registered Users Max

Field	Value
Parameter Name	Registered Users Max
Description	Maximum number of registered users
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/registeredUsersMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC Attempted Registrations

Field	Value
Parameter Name	SBC Attempted Registrations
Description	Number of SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/sbcAttemptedRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Registration Success Ratio Average

Field	Value
Parameter Name	SBC Registration Success Ratio Average
Description	Average success ratio for SBC-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/sbcRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC Successful Registrations

Field	Value
Parameter Name	SBC Successful Registrations
Description	Number of successful SBC-initiated outbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/sbcSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe In

Field	Value
Parameter Name	Subscribe In
Description	Number of inbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/subscribeIn
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Out

Field	Value
Parameter Name	Subscribe Out
Description	Number of outbound SUBSCRIBE requests
Type	Counter
Aggregation Support	No
Version Support Start	7.4.100
REST URL	sbc/otherStats/srd/subscribeOut
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Average

Field	Value
Parameter Name	Subscribe Rate In Average
Description	Average inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/subscribeRateInAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate In Max

Field	Value
Parameter Name	Subscribe Rate In Max
Description	Maximum inbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/subscribeRateInMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Average

Field	Value
Parameter Name	Subscribe Rate Out Average
Description	Average outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/subscribeRateOutAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Subscribe Rate Out Max

Field	Value
Parameter Name	Subscribe Rate Out Max
Description	Maximum outbound SUBSCRIBE Rate (dialogs per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/subscribeRateOutMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Average

Field	Value
Parameter Name	Transaction Rate Average
Description	Average SIP rransactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/transactionRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transaction Rate Max

Field	Value
Parameter Name	Transaction Rate Max
Description	Maximum SIP transactions rate (transactions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/transactionRateMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

User Registration Success Ratio Average

Field	Value
Parameter Name	User Registration Success Ratio Average
Description	Average success ratio for user-initiated REGISTER dialogs (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/userRegistrationSuccessRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

User Successful Registrations

Field	Value
Parameter Name	User Successful Registrations
Description	Number of successful user-initiated inbound REGISTER dialogs
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/otherStats/srd/userSuccessfulRegistrations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SBC SIP Rec Stats

The following lists the SBC SIP Rec Stats-related performance monitoring elements

- SIP Rec Rate Average
- SIP Rec Sessions Average
- SIP Rec Sessions Max

SIP Rec Rate Average

Field	Value
Parameter Name	SIP Rec Rate Average
Description	Average establishment rate for SIP-REC sessions (sessions per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	sbc/sipRecStats/srd/sipRecRateAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Average

Field	Value
Parameter Name	SIP Rec Sessions Average
Description	Average number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	sbc/sipRecStats/srd/sipRecSessionsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Sessions Max

Field	Value
Parameter Name	SIP Rec Sessions Max
Description	Maximum number of active SIP-REC sessions
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	sbcsipRecStats/srd/sipRecSessionsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

SBC User Defined

The following lists the SBC User Defined-related performance monitoring elements

- User Defined Failures In 1
- User Defined Failures In 10
- User Defined Failures In 11
- User Defined Failures In 12
- User Defined Failures In 13
- User Defined Failures In 14
- User Defined Failures In 15
- User Defined Failures In 16
- User Defined Failures In 17
- User Defined Failures In 18
- User Defined Failures In 19
- User Defined Failures In 2
- User Defined Failures In 20
- User Defined Failures In 21
- User Defined Failures In 22
- User Defined Failures In 23
- User Defined Failures In 24
- User Defined Failures In 25
- User Defined Failures In 26
- User Defined Failures In 3
- User Defined Failures In 4
- User Defined Failures In 5
- User Defined Failures In 6

- User Defined Failures In 7
- User Defined Failures In 8
- User Defined Failures In 9
- User Defined Failures Out 1
- User Defined Failures Out 10
- User Defined Failures Out 11
- User Defined Failures Out 12
- User Defined Failures Out 13
- User Defined Failures Out 14
- User Defined Failures Out 15
- User Defined Failures Out 16
- User Defined Failures Out 17
- User Defined Failures Out 18
- User Defined Failures Out 19
- User Defined Failures Out 2
- User Defined Failures Out 20
- User Defined Failures Out 21
- User Defined Failures Out 22
- User Defined Failures Out 23
- User Defined Failures Out 24
- User Defined Failures Out 25
- User Defined Failures Out 26
- User Defined Failures Out 3
- User Defined Failures Out 4
- User Defined Failures Out 5
- User Defined Failures Out 6
- User Defined Failures Out 7
- User Defined Failures Out 8
- User Defined Failures Out 9

User Defined Failures In 1

Field	Value
Parameter Name	User Defined Failures In 1
Description	Number of inbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn1
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 10

Field	Value
Parameter Name	User Defined Failures In 10
Description	Number of inbound user defined failures 10
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn10
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 11

Field	Value
Parameter Name	User Defined Failures In 11
Description	Number of inbound user defined failures 11
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn11
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 12

Field	Value
Parameter Name	User Defined Failures In 12
Description	Number of inbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn12
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 13

Field	Value
Parameter Name	User Defined Failures In 13
Description	Number of inbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn13
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 14

Field	Value
Parameter Name	User Defined Failures In 14
Description	Number of inbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn14
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 15

Field	Value
Parameter Name	User Defined Failures In 15
Description	Number of inbound user defined failures 15
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn15
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 16

Field	Value
Parameter Name	User Defined Failures In 16
Description	Number of inbound user defined failures 16
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn16
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 17

Field	Value
Parameter Name	User Defined Failures In 17
Description	Number of inbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn17
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 18

Field	Value
Parameter Name	User Defined Failures In 18
Description	Number of inbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn18
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 19

Field	Value
Parameter Name	User Defined Failures In 19
Description	Number of inbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn19
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 2

Field	Value
Parameter Name	User Defined Failures In 2
Description	Number of inbound user defined failures 2
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn2
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 20

Field	Value
Parameter Name	User Defined Failures In 20
Description	Number of inbound user defined failures 20
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn20
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 21

Field	Value
Parameter Name	User Defined Failures In 21
Description	Number of inbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn21
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 22

Field	Value
Parameter Name	User Defined Failures In 22
Description	Number of inbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn22
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 23

Field	Value
Parameter Name	User Defined Failures In 23
Description	Number of inbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn23
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 24

Field	Value
Parameter Name	User Defined Failures In 24
Description	Number of inbound user defined failures 24
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn24
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 25

Field	Value
Parameter Name	User Defined Failures In 25
Description	Number of inbound user defined failures 25
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn25
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 26

Field	Value
Parameter Name	User Defined Failures In 26
Description	Number of inbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn26
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 3

Field	Value
Parameter Name	User Defined Failures In 3
Description	Number of inbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn3
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 4

Field	Value
Parameter Name	User Defined Failures In 4
Description	Number of inbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn4
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 5

Field	Value
Parameter Name	User Defined Failures In 5
Description	Number of inbound user defined failures 5
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn5
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 6

Field	Value
Parameter Name	User Defined Failures In 6
Description	Number of inbound user defined failures 6
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn6
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 7

Field	Value
Parameter Name	User Defined Failures In 7
Description	Number of inbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn7
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 8

Field	Value
Parameter Name	User Defined Failures In 8
Description	Number of inbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn8
Supported Product Types	SW_SBC_GROUP

User Defined Failures In 9

Field	Value
Parameter Name	User Defined Failures In 9
Description	Number of inbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresIn9
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 1

Field	Value
Parameter Name	User Defined Failures Out 1
Description	Number of outbound user defined failures 1
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut1
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 10

Field	Value
Parameter Name	User Defined Failures Out 10
Description	Number of outbound user defined failures 10
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut10
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 11

Field	Value
Parameter Name	User Defined Failures Out 11
Description	Number of outbound user defined failures 11
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut11
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 12

Field	Value
Parameter Name	User Defined Failures Out 12
Description	Number of outbound user defined failures 12
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut12
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 13

Field	Value
Parameter Name	User Defined Failures Out 13
Description	Number of outbound user defined failures 13
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut13
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 14

Field	Value
Parameter Name	User Defined Failures Out 14
Description	Number of outbound user defined failures 14
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut14
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 15

Field	Value
Parameter Name	User Defined Failures Out 15
Description	Number of outbound user defined failures 15
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut15
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 16

Field	Value
Parameter Name	User Defined Failures Out 16
Description	Number of outbound user defined failures 16
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut16
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 17

Field	Value
Parameter Name	User Defined Failures Out 17
Description	Number of outbound user defined failures 17
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut17
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 18

Field	Value
Parameter Name	User Defined Failures Out 18
Description	Number of outbound user defined failures 18
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut18
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 19

Field	Value
Parameter Name	User Defined Failures Out 19
Description	Number of outbound user defined failures 19
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut19
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 2

Field	Value
Parameter Name	User Defined Failures Out 2
Description	Number of outbound user defined failures 2
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut2
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 20

Field	Value
Parameter Name	User Defined Failures Out 20
Description	Number of outbound user defined failures 20
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut20
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 21

Field	Value
Parameter Name	User Defined Failures Out 21
Description	Number of outbound user defined failures 21
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut21
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 22

Field	Value
Parameter Name	User Defined Failures Out 22
Description	Number of outbound user defined failures 22
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut22
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 23

Field	Value
Parameter Name	User Defined Failures Out 23
Description	Number of outbound user defined failures 23
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut23
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 24

Field	Value
Parameter Name	User Defined Failures Out 24
Description	Number of outbound user defined failures 24
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut24
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 25

Field	Value
Parameter Name	User Defined Failures Out 25
Description	Number of outbound user defined failures 25
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut25
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 26

Field	Value
Parameter Name	User Defined Failures Out 26
Description	Number of outbound user defined failures 26
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut26
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 3

Field	Value
Parameter Name	User Defined Failures Out 3
Description	Number of outbound user defined failures 3
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut3
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 4

Field	Value
Parameter Name	User Defined Failures Out 4
Description	Number of outbound user defined failures 4
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut4
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 5

Field	Value
Parameter Name	User Defined Failures Out 5
Description	Number of outbound user defined failures 5
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut5
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 6

Field	Value
Parameter Name	User Defined Failures Out 6
Description	Number of outbound user defined failures 6
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut6
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 7

Field	Value
Parameter Name	User Defined Failures Out 7
Description	Number of outbound user defined failures 7
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut7
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 8

Field	Value
Parameter Name	User Defined Failures Out 8
Description	Number of outbound user defined failures 8
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut8
Supported Product Types	SW_SBC_GROUP

User Defined Failures Out 9

Field	Value
Parameter Name	User Defined Failures Out 9
Description	Number of outbound user defined failures 9
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4
REST URL	sbc/userDefined/srd/userDefinedFailuresOut9
Supported Product Types	SW_SBC_GROUP

17 System

The following lists the System value-related performance monitoring groups

- System Stats

System Stats

The following lists the System Stats-related performance monitoring elements

- DSP Util Average
- DSP Util Max
- DSP Util Min

DSP Util Average

Field	Value
Parameter Name	DSP Util Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMDSPUtilAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

DSP Util Max

Field	Value
Parameter	DSP Util Max

Field	Value
Name	
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMDSPUtilMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

DSP Util Min

Field	Value
Parameter Name	DSP Util Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMDSPUtilMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_

Field	Value
	GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

18 System (REST)

The following lists the System (REST) value-related performance monitoring groups

- License Stats
- Metering License Stats
- System Stats

License Stats

The following lists the License Stats-related performance monitoring elements

- License FEU Usage Average
- License FEU Usage Max
- License SBC Media Usage Average
- License SBC Media Usage Max
- License SBC Signaling Usage Average
- License SBC Signaling Usage Max
- License SIP Rec Usage Average
- License SIP Rec Usage Max
- License Transcoding Usage Average
- License Transcoding Usage Max
- License Web RTC Usage Average
- License Web RTC Usage Max

License FEU Usage Average

Field	Value
Parameter Name	License FEU Usage Average
Description	Average FEU license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4

Field	Value
REST URL	system/licenseStats/global/licenseFeuUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

License FEU Usage Max

Field	Value
Parameter Name	License FEU Usage Max
Description	Maximum FEU license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseFeuUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

License SBC Media Usage Average

Field	Value
Parameter Name	License SBC Media Usage Average
Description	Average SBC-MEDIA license key usage (%)
Type	Gauge
Aggregation Support	No
Version	7.4

Field	Value
Support Start	
REST URL	system/licenseStats/global/licenseSbcMediaUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License SBC Media Usage Max

Field	Value
Parameter Name	License SBC Media Usage Max
Description	Maximum SBC-MEDIA license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseSbcMediaUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License SBC Signaling Usage Average

Field	Value
Parameter Name	License SBC Signaling Usage Average
Description	Average SBC-SIGNALING license key usage (%)
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseSbcSignalingUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

License SBC Signaling Usage Max

Field	Value
Parameter Name	License SBC Signaling Usage Max
Description	Maximum SBC-SIGNALING license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseSbcSignalingUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

License SIP Rec Usage Average

Field	Value
Parameter Name	License SIP Rec Usage Average
Description	Average SIP-REC license key usage (%)
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseSipRecUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License SIP Rec Usage Max

Field	Value
Parameter Name	License SIP Rec Usage Max
Description	Maximum SIP-REC license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseSipRecUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License Transcoding Usage Average

Field	Value
Parameter Name	License Transcoding Usage Average
Description	Average CODER-TRANSCODING license key usage (%)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseTranscodingUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License Transcoding Usage Max

Field	Value
Parameter Name	License Transcoding Usage Max
Description	Maximum CODER-TRANSCODING license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/licenseStats/global/licenseTranscodingUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

License Web RTC Usage Average

Field	Value
Parameter Name	License Web RTC Usage Average
Description	Average WebRTC license key usage (%)

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/licenseStats/global/licenseWebRTCUsageAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

License Web RTC Usage Max

Field	Value
Parameter Name	License Web RTC Usage Max
Description	Maximum WebRTC license key usage (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	system/licenseStats/global/licenseWebRTCUsageMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBBG_GROUP; M600_GROUP; M1K_MSBBG_GROUP; M3100_ESBC_GROUP

Metering License Stats

The following lists the Metering License Stats-related performance monitoring elements

- Missed SIP Rec Duration
- Missed Sessions Duration
- Missed Transcoding Duration

- Missed Web RTC Duration
- SIP Rec Duration
- Sessions Duration
- Transcoding Duration
- Web RTC Duration

Missed Sessions Duration

Field	Value
Parameter Name	Missed Sessions Duration
Description	Missed Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/missedSessionsDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Missed SIP Rec Duration

Field	Value
Parameter Name	Missed SIP Rec Duration
Description	Missed SIPRec Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/missedSipRecDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Missed Transcoding Duration

Field	Value
Parameter Name	Missed Transcoding Duration
Description	Missed Transcoding Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/missedTranscodingDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Missed Web RTC Duration

Field	Value
Parameter Name	Missed Web RTC Duration

Field	Value
Description	Missed WebRTC Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/missedWebRTCDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Sessions Duration

Field	Value
Parameter Name	Sessions Duration
Description	Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/sessionsDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

SIP Rec Duration

Field	Value
Parameter Name	SIP Rec Duration
Description	SIPRec Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/sipRecDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Transcoding Duration

Field	Value
Parameter Name	Transcoding Duration
Description	Transcoding Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/transcodingDuration

Field	Value
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Web RTC Duration

Field	Value
Parameter Name	Web RTC Duration
Description	WebRTC Sessions Duration (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
Version Support End	7.4
REST URL	system/meteringLicenseStats/global/webRTCDuration
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

System Stats

The following lists the System Stats-related performance monitoring elements

- Memory Utilization Average
- Memory Utilization Max

Memory Utilization Average

Field	Value
Parameter Name	Memory Utilization Average

Field	Value
Description	Average memory utilization (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/systemStats/global/memoryUtilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

Memory Utilization Max

Field	Value
Parameter Name	Memory Utilization Max
Description	Maximum memory utilization (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	system/systemStats/global/memoryUtilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; SW_SBC_GROUP; M4K_ESBC_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBB_GROUP; M600_GROUP; M1K_MSBB_GROUP; M3100_ESBC_GROUP

19 Trunk

The following lists the Trunk value-related performance monitoring groups

- Utilization

Utilization

The following lists the Utilization-related performance monitoring elements

- Trunk Utilization Average
- Trunk Utilization Max
- Trunk Utilization Min

Trunk Utilization Average

Field	Value
Parameter Name	Trunk Utilization Average
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMTrunkUtilizationAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Trunk Utilization Max

Field	Value
Parameter Name	Trunk Utilization Max

Field	Value
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMTrunkUtilizationMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Trunk Utilization Min

Field	Value
Parameter Name	Trunk Utilization Min
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMTrunkUtilizationMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

20 Trunk (REST)

The following lists the Trunk (REST) value-related performance monitoring groups

- Gateway Bri Stats
- Gateway DS 1 Stats
- Gateway Trunk Stats

Gateway Bri Stats

The following lists the Gateway Bri Stats-related performance monitoring elements

- Code Violation Seconds
- Code Violations
- Hdlc Crc Errors
- Lof Seconds
- Slip Seconds
- Slips

Code Violation Seconds

Field	Value
Parameter Name	Code Violation Seconds
Description	Number of code violation seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/codeViolationSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Code Violations

Field	Value
Parameter Name	Code Violations
Description	Number of code violations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/codeViolations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Hdlc Crc Errors

Field	Value
Parameter Name	Hdlc Crc Errors
Description	Number of HDLC CRC errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/hdlcCrcErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Lof Seconds

Field	Value
Parameter Name	Lof Seconds
Description	Number of loss of frame (LOF) seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/lofSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Slip Seconds

Field	Value
Parameter Name	Slip Seconds
Description	Number of slip seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/slipSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Slips

Field	Value
Parameter Name	Slips
Description	Number of slip events
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/briStats/trunk/slips
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Gateway DS 1 Stats

The following lists the Gateway DS 1 Stats-related performance monitoring elements

- Ais Alarms
- Bit Errors
- Bursty Errored Seconds
- Controlled Slip Seconds
- Controlled Slips
- Crc 4 Multiframe Errors
- Crc Errors
- Degraded Minutes
- Ebit Errors
- Errored Seconds
- Framing Errors
- Line Coding Violations
- Line Errored Seconds
- Lof Alarms

- Los Alarms
- Path Coding Violations
- Remote Alarms Received
- Severely Errored Framing Seconds
- Severely Errored Seconds
- Unavailable Seconds

Ais Alarms

Field	Value
Parameter Name	Ais Alarms
Description	Number of alarm indication signal (AIS) alarms
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/aisAlarms
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Bit Errors

Field	Value
Parameter Name	Bit Errors
Description	Number of bit errors
Type	Counter
Aggregation Support	Yes
Version	7.4.100

Field	Value
Support Start	
REST URL	gateway/ds1Stats/trunk/bitErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Bursty Errored Seconds

Field	Value
Parameter Name	Bursty Errored Seconds
Description	Number of bursty errored seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/burstyErroredSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Controlled Slip Seconds

Field	Value
Parameter Name	Controlled Slip Seconds
Description	Number of controlled slip seconds
Type	Counter
Aggregation Support	Yes

Field	Value
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/controlledSlipSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

Controlled Slips

Field	Value
Parameter Name	Controlled Slips
Description	Number of controlled slip events
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/controlledSlips
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

Crc 4 Multiframe Errors

Field	Value
Parameter Name	Crc 4 Multiframe Errors
Description	Number of multi-frame alignment errors or FEC errors
Type	Counter
Aggregation	Yes

Field	Value
Support	
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/crc4MultiframeErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

Crc Errors

Field	Value
Parameter Name	Crc Errors
Description	Number of CRC errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/crcErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

Degraded Minutes

Field	Value
Parameter Name	Degraded Minutes
Description	Number of degraded minutes
Type	Counter

Field	Value
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/degradedMinutes
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Ebit Errors

Field	Value
Parameter Name	Ebit Errors
Description	Number of E-bit errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/eBitErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Errored Seconds

Field	Value
Parameter Name	Errored Seconds
Description	Number of errored seconds

Field	Value
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/erroredSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Framing Errors

Field	Value
Parameter Name	Framing Errors
Description	Number of received framing errors
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/framingErrors
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Line Coding Violations

Field	Value
Parameter Name	Line Coding Violations

Field	Value
Description	Number of line coding violations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/lineCodingViolations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Line Errored Seconds

Field	Value
Parameter Name	Line Errored Seconds
Description	Number of line errored seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/lineErroredSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Lof Alarms

Field	Value
Parameter	Lof Alarms

Field	Value
Name	
Description	Number of loss of frame (LOF) alarms
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/lofAlarms
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Los Alarms

Field	Value
Parameter Name	Los Alarms
Description	Number of loss of signal (LOS) alarms
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/losAlarms
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ESBC_GROUP

Path Coding Violations

Field	Value
Parameter Name	Path Coding Violations
Description	Number of path coding violations
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/pathCodingViolations
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Remote Alarms Received

Field	Value
Parameter Name	Remote Alarms Received
Description	Number of remote alarm indication (RAI) alarms
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/remoteAlarmsReceived
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Severely Errored Framing Seconds

Field	Value
Parameter Name	Severely Errored Framing Seconds
Description	Number of severely errored framing seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/severelyErroredFramingSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Severely Errored Seconds

Field	Value
Parameter Name	Severely Errored Seconds
Description	Number of severely errored seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/severelyErroredSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Unavailable Seconds

Field	Value
Parameter Name	Unavailable Seconds
Description	Number of unavailable seconds
Type	Counter
Aggregation Support	Yes
Version Support Start	7.4.100
REST URL	gateway/ds1Stats/trunk/unavailableSeconds
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Gateway Trunk Stats

The following lists the Gateway Trunk Stats-related performance monitoring elements

- Active Channels Average
- Active Channels Max
- Channels In Maintenance Average
- Channels In Maintenance Max
- Channels In Service Average
- Channels In Service Max
- Channels Not Equipped Average
- Channels Not Equipped Max
- Channels Out Of Service Average
- Channels Out Of Service Max
- Utilization Average
- Utilization Max

Active Channels Average

Field	Value
Parameter Name	Active Channels Average
Description	Average number of active channels
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/activeChannelsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Channels Max

Field	Value
Parameter Name	Active Channels Max
Description	Maximum number of active channels
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/activeChannelsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels In Maintenance Average

Field	Value
Parameter Name	Channels In Maintenance Average
Description	Average Number of channels in maintenance
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/trunkStats/trunk/channelsInMaintenanceAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels In Maintenance Max

Field	Value
Parameter Name	Channels In Maintenance Max
Description	Maximum Number of channels in maintenance
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/channelsInMaintenanceMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels In Service Average

Field	Value
Parameter Name	Channels In Service Average
Description	Average Number of channels in service
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/trunkStats/trunk/channelsInServiceAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels In Service Max

Field	Value
Parameter Name	Channels In Service Max
Description	Maximum Number of active channels in trunk
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/channelsInServiceMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels Not Equipped Average

Field	Value
Parameter Name	Channels Not Equipped Average
Description	Average Number of channels not equipped (alarm on trunk)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/trunkStats/trunk/channelsNotEquippedAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels Not Equipped Max

Field	Value
Parameter Name	Channels Not Equipped Max
Description	Maximum Number of channels not equipped (alarm on trunk)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/channelsNotEquippedMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels Out Of Service Average

Field	Value
Parameter Name	Channels Out Of Service Average
Description	Average Number of channels in service
Type	Gauge
Aggregation Support	No
Version Support Start	7.4.100
REST URL	gateway/trunkStats/trunk/channelsOutOfServiceAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Channels Out Of Service Max

Field	Value
Parameter Name	Channels Out Of Service Max
Description	Maximum Number of active channels in trunk
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/channelsOutOfServiceMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Utilization Average

Field	Value
Parameter Name	Utilization Average
Description	Average percentage of active channels from total capacity (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/utilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Utilization Max

Field	Value
Parameter Name	Utilization Max
Description	Maximum percentage of active channels from total capacity (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunk/utilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

21 Trunk Group

The following lists the Trunk Group value-related performance monitoring groups

- Call Stats
- Call Failures
- Trunk Stats

Call Failures

The following lists the Call Failures-related performance monitoring elements

- No Resources Calls

No Resources Calls

Field	Value
Parameter Name	No Resources Calls
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupNoResourcesCallsVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Call Stats

The following lists the Call Stats-related performance monitoring elements

- Call Duration (sec) Average
- Call Duration (sec) Max

■ Call Duration (sec) Min

Call Duration (sec) Average

Field	Value
Parameter Name	Call Duration (sec) Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupCallDurationAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBC_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBC_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBC_GROUP

Call Duration (sec) Max

Field	Value
Parameter Name	Call Duration (sec) Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupCallDurationMax

Field	Value
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Call Duration (sec) Min

Field	Value
Parameter Name	Call Duration (sec) Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupCallDurationMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Trunk Stats

The following lists the Trunk Stats-related performance monitoring elements

- All Trunks Busy (%)
- All Trunks Busy Time (sec)
- Utilization (%) Average
- Utilization (%) Max
- Utilization (%) Min
- Utilization (channels) Average

- Utilization (channels) Max
- Utilization (channels) Min

All Trunks Busy (%)

Field	Value
Parameter Name	All Trunks Busy (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.0
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupAllTrunksBusyPercentageVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

All Trunks Busy Time (sec)

Field	Value
Parameter Name	All Trunks Busy Time (sec)
Type	Counter
Aggregation Support	Yes
Version Support Start	7.0
Version Support End	7.2.300

Field	Value
MIB Name	acPMSIPTrunkGroupAllTrunksBusyVal
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Utilization (%) Average

Field	Value
Parameter Name	Utilization (%) Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupPercentageUtilizationAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Utilization (%) Max

Field	Value
Parameter Name	Utilization (%) Max
Type	Gauge
Aggregation	Yes

Field	Value
Support	
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTTrunkGroupPercentageUtilizationMax
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Utilization (%) Min

Field	Value
Parameter Name	Utilization (%) Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTTrunkGroupPercentageUtilizationMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Utilization (channels) Average

Field	Value
Parameter Name	Utilization (channels) Average
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupUtilizationAverage
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBG_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBG_GROUP; M800_PRO_GROUP; M4K_ESBC_GROUP; SW_SBC_GROUP; MP1288_GROUP; MP500_LI_MSBG_GROUP

Utilization (channels) Max

Field	Value
Parameter Name	Utilization (channels) Max
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupUtilizationMax
Supported	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_

Field	Value
Product Types	GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

Utilization (channels) Min

Field	Value
Parameter Name	Utilization (channels) Min
Type	Gauge
Aggregation Support	Yes
Version Support Start	7.2
Version Support End	7.2.300
MIB Name	acPMSIPTrunkGroupUtilizationMin
Supported Product Types	MG_GROUP; MP11X_GROUP; MP124_GROUP; MP124E_GROUP; M2K_GROUP; IPM2K_GROUP; M3K_GROUP; IPM3K_GROUP; M3K_8410_GROUP; M1K_GROUP; M1K_MSBB_GROUP; M1K_PRO_GROUP; M600_GROUP; MP500_MSBB_GROUP; M800_PRO_GROUP; M4K_ESBB_GROUP; SW_SBB_GROUP; MP1288_GROUP; MP500_LI_MSBB_GROUP

22 Trunk Group (REST)

The following lists the Trunk Group (REST) value-related performance monitoring groups

- Gateway Call Stats
- Gateway Trunk Stats

Gateway Call Stats

The following lists the Gateway Call Stats-related performance monitoring elements

- Active Calls Average
- Active Calls IP 2 Tel Average
- Active Calls IP 2 Tel Max
- Active Calls Max
- Active Calls Tel 2 IP 2 Average
- Active Calls Tel 2 IP Max
- Answer Seizure Ratio Average
- Attempted Calls IP 2 Tel
- Attempted Calls Rate IP 2 Tel Average
- Attempted Calls Rate IP 2 Tel Max
- Attempted Calls Rate Tel 2 IP Average
- Attempted Calls Rate Tel 2 IP Max
- Attempted Calls Tel 2 IP
- Attempted Fax IP 2 Tel
- Attempted Fax Tel 2 IP
- Average Call Duration Average
- Established Calls IP 2 Tel
- Established Calls Rate IP 2 Tel Average
- Established Calls Rate IP 2 Tel Max
- Established Calls Rate Tel 2 IP Average
- Established Calls Rate Tel 2 IP Max
- Established Calls Tel 2 IP
- Established Fax IP 2 Tel
- Established Fax Tel 2 IP

- Failed Calls Busy IP 2 Tel
- Failed Calls Busy Tel 2 IP
- Failed Calls No Answer IP 2 Tel
- Failed Calls No Answer Tel 2 IP
- Failed Calls No Cap Match IP 2 Tel
- Failed Calls No Cap Match Tel 2 IP
- Failed Calls No Route IP 2 Tel
- Failed Calls No Route Tel 2 IP
- Failed Calls No Rsc IP 2 Tel
- Failed Calls No Rsc Tel 2 IP
- Failed Calls Other IP 2 Tel
- Failed Calls Other Tel 2 IP
- Forwarded Calls IP 2 Tel
- Forwarded Calls Tel 2 IP

Active Calls Average

Field	Value
Parameter Name	Active Calls Average
Description	Average number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Average

Field	Value
Parameter Name	Active Calls IP 2 Tel Average
Description	Average number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls IP 2 Tel Max

Field	Value
Parameter Name	Active Calls IP 2 Tel Max
Description	Maximum number of active IP->Tel calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Max

Field	Value
Parameter Name	Active Calls Max
Description	Maximum number of active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP 2 Average

Field	Value
Parameter Name	Active Calls Tel 2 IP 2 Average
Description	Average Number of Tel->IP Active calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsTel2Ip2Avg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Active Calls Tel 2 IP Max

Field	Value
Parameter Name	Active Calls Tel 2 IP Max
Description	Maximum number of active Tel->IP calls
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/activeCallsTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Answer Seizure Ratio Average

Field	Value
Parameter Name	Answer Seizure Ratio Average
Description	Average answer/seizure ratio (ASR, %)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/answerSeizureRatioAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls IP 2 Tel

Field	Value
Parameter Name	Attempted Calls IP 2 Tel
Description	Number of attempted IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Average
Description	Average rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Attempted Calls Rate IP 2 Tel Max
Description	Maximum rate of attempted IP->Tel calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Average
Description	Average rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Attempted Calls Rate Tel 2 IP Max
Description	Maximum rate of attempted Tel->IP calls (call attempts per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Calls Tel 2 IP

Field	Value
Parameter Name	Attempted Calls Tel 2 IP
Description	Number of attempted Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax IP 2 Tel

Field	Value
Parameter Name	Attempted Fax IP 2 Tel
Description	Number of attempted IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Attempted Fax Tel 2 IP

Field	Value
Parameter Name	Attempted Fax Tel 2 IP
Description	Number of attempted Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/attemptedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Average Call Duration Average

Field	Value
Parameter Name	Average Call Duration Average
Description	Average call duration (ACD, seconds)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/averageCallDurationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls IP 2 Tel

Field	Value
Parameter Name	Established Calls IP 2 Tel
Description	Number of established IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Average

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Average
Description	Average rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsRateIp2TelAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate IP 2 Tel Max

Field	Value
Parameter Name	Established Calls Rate IP 2 Tel Max
Description	Maximum rate of established IP->Tel calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsRateIp2TelMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Average

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Average
Description	Average rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsRateTel2IpAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Rate Tel 2 IP Max

Field	Value
Parameter Name	Established Calls Rate Tel 2 IP Max
Description	Maximum rate of established Tel->IP calls (call establish per second)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsRateTel2IpMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Calls Tel 2 IP

Field	Value
Parameter Name	Established Calls Tel 2 IP
Description	Number of established Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax IP 2 Tel

Field	Value
Parameter Name	Established Fax IP 2 Tel
Description	Number of established IP->Tel fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedFaxIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Established Fax Tel 2 IP

Field	Value
Parameter Name	Established Fax Tel 2 IP
Description	Number of established Tel->IP fax calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/establishedFaxTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy IP 2 Tel

Field	Value
Parameter Name	Failed Calls Busy IP 2 Tel
Description	Number of failed IP->Tel calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsBusyIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Busy Tel 2 IP

Field	Value
Parameter Name	Failed Calls Busy Tel 2 IP
Description	Number of failed Tel->IP Calls due to callee being busy
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsBusyTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Answer IP 2 Tel
Description	Number of failed IP->Tel calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoAnswerIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Answer Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Answer Tel 2 IP
Description	Number of failed Tel->IP calls due to no answer from the callee
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoAnswerTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Cap Match IP 2 Tel
Description	Number of failed IP->Tel calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoCapMatchIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Cap Match Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Cap Match Tel 2 IP
Description	Number of failed Tel->IP calls due to media mismatch
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoCapMatchTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Route IP 2 Tel
Description	Number of failed IP->Tel calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoRouteIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Route Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Route Tel 2 IP
Description	Number of failed Tel->IP calls due to routing failure
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoRouteTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc IP 2 Tel

Field	Value
Parameter Name	Failed Calls No Rsc IP 2 Tel
Description	Number of failed IP->Tel calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoRscIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls No Rsc Tel 2 IP

Field	Value
Parameter Name	Failed Calls No Rsc Tel 2 IP
Description	Number of failed Tel->IP calls due to lack of internal resources
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsNoRscTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other IP 2 Tel

Field	Value
Parameter Name	Failed Calls Other IP 2 Tel
Description	Number of failed IP->Tel calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsOtherIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Failed Calls Other Tel 2 IP

Field	Value
Parameter Name	Failed Calls Other Tel 2 IP
Description	Number of failed Tel->IP calls due to other reasons
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/failedCallsOtherTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls IP 2 Tel

Field	Value
Parameter Name	Forwarded Calls IP 2 Tel
Description	Number of forwarded IP->Tel calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/forwardedCallsIp2Tel
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Forwarded Calls Tel 2 IP

Field	Value
Parameter Name	Forwarded Calls Tel 2 IP
Description	Number of forwarded Tel->IP calls
Type	Counter
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/callStats/trunkGroup/forwardedCallsTel2Ip
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

Gateway Trunk Stats

The following lists the Gateway Trunk Stats-related performance monitoring elements

- Active Channels Average
- Active Channels Max
- All Channels Busy Average
- Utilization Average
- Utilization Max

Active Channels Average

Field	Value
Parameter Name	Active Channels Average
Description	Average number of active channels
Type	Gauge
Aggregation Support	No

Field	Value
Version Support Start	7.4
REST URL	gateway/trunkStats/trunkGroup/activeChannelsAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

Active Channels Max

Field	Value
Parameter Name	Active Channels Max
Description	Maximum number of active channels
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunkGroup/activeChannelsMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ ESBC_GROUP

All Channels Busy Average

Field	Value
Parameter Name	All Channels Busy Average
Description	percentage of time within 15 min that all channels were busy
Type	Gauge
Aggregation	No

Field	Value
Support	
Version Support Start	7.4.100
REST URL	gateway/trunkStats/trunkGroup/allChannelsBusy
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Utilization Average

Field	Value
Parameter Name	Utilization Average
Description	Average percentage of active channels from total capacity (%)
Type	Gauge
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunkGroup/utilizationAvg
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSGB_GROUP; M600_GROUP; M1K_MSGB_GROUP; M3100_ ESBC_GROUP

Utilization Max

Field	Value
Parameter Name	Utilization Max
Description	Maximum percentage of active channels from total capacity (%)
Type	Gauge

Field	Value
Aggregation Support	No
Version Support Start	7.4
REST URL	gateway/trunkStats/trunkGroup/utilizationMax
Supported Product Types	M1K_PRO_GROUP; M800_PRO_GROUP; MP1288_GROUP; M1K_GROUP; MP500_MSBG_GROUP; M600_GROUP; M1K_MSBG_GROUP; M3100_ESBC_GROUP

International Headquarters

1 Hayarden Street,

Airport City

Lod 7019900, Israel

Tel: +972-3-976-4000

Fax: +972-3-976-4040

AudioCodes Inc.

200 Cottontail Lane

Suite A101E

Somerset NJ 08873

Tel: +1-732-469-0880

Fax: +1-732-469-2298

Contact us: <https://www.audiocodes.com/corporate/offices-worldwide>

Website: <https://www.audiocodes.com/>

Documentation Feedback: <https://online.audiocodes.com/documentation-feedback>

©2022 AudioCodes Ltd. All rights reserved. AudioCodes, AC, HD VoIP, HD VoIP Sounds Better, IPmedia, Mediant, MediaPack, What's Inside Matters, OSN, SmartTAP, User Management Pack, VMAS, VoIPerfect, VoIPerfectHD, Your Gateway To VoIP, 3GX, VocaNom, AudioCodes One Voice, AudioCodes Meeting Insights, AudioCodes Room Experience and CloudBond are trademarks or registered trademarks of AudioCodes Limited. All other products or trademarks are property of their respective owners. Product specifications are subject to change without notice.

Document #: LTRT-94915

